



200-401^{Q&As}

Managing Industrial Networks with Cisco Networking Technologies
(IMINS)

Pass Cisco 200-401 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/200-401.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

What two things does a router do when it forwards a packet? (Choose two.)

- A. switches the packet to the appropriate outgoing interfaces
- B. computes the destination host address
- C. determines the next hop on the path
- D. updates the destination IP address
- E. forwards ARP requests

Correct Answer: AC

QUESTION 2


In which two ways could you minimize the impact of monitoring an industrial network? (Choose two.)

- A. Send random messages to a device and see what the response is.
- B. Do frequent ping sweeps to industrial devices to check for their proper operations.
- C. Make a copy of all the network traffic and analyze it offline.
- D. Use an industrial-network-grade IDS-IPS system.

Correct Answer: CD

QUESTION 3

Exhibit:

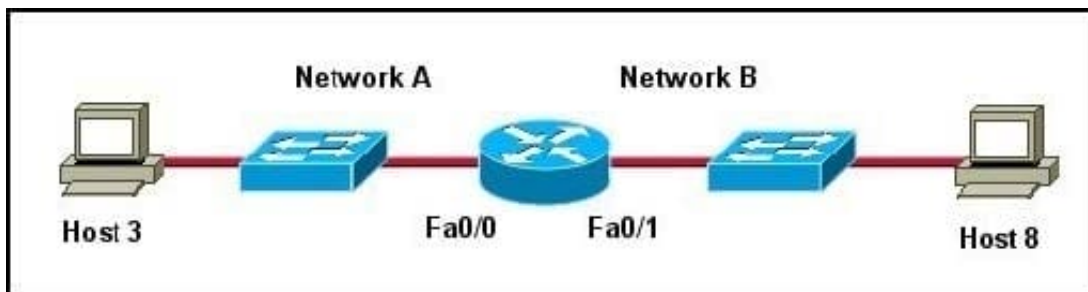

Refer to the exhibit. Host 3 on Network A is sending data to Host 8 on Network B. Which address is the default gateway of Host 3?

- A. the address of the switch interface that is connected to router interface Fa0/0
- B. the address of the switch interface that is connected to router interface Fa0/1



- C. the address of the host that is connected to Network A
- D. the address of the host that is connected to Network B
- E. the address of the router interface Fa0/0
- F. the address of the router interface Fa0/1

Correct Answer: E

QUESTION 4

What does the Cisco PSIRT issue for significant security issues that directly involve Cisco products and require an upgrade, fix, or other customer action?

- A. Cisco Security Advisories
- B. Cisco Security Responses
- C. Cisco Security Notices
- D. Cisco Security Bulletins

Correct Answer: A

QUESTION 5

You are called upon to troubleshoot connectivity problems to a network device on a production floor. You have used ping and traceroute to verify that you cannot connect to the device from the management network. The network is 209.165.202.128/27 and the device has been given the IP address 209.165.202.158 and mask 255.255.255.224. You have verified that you can reach the device with your computer connected to the same switch as the device. What could be the cause of this problem?

- A. The device is set to the wrong subnet mask.
- B. The device is set to the wrong IP address.
- C. The device has no IP default gateway.
- D. The device is connected to a switchport in the wrong VLAN.

Correct Answer: C

[200-401 Practice Test](#)

[200-401 Study Guide](#)

[200-401 Exam Questions](#)