



201^{Q&As}

TMOS Administration

Pass F5 201 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/201.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by F5 Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

The BIG-IP Administrator configures an HTTP monitor with a specific receive string. The status is marked '\\down\\'.

Which tool should the administrator use to identify the problem?

- A. Ping
- B. Health
- C. tcpdump
- D. ifconfig

Correct Answer: C

QUESTION 2

Generally speaking, should the monitor templates be used as production monitors or should they be customized prior to use.

- A. Most templates, such as http and tcp, are as effective as customized monitors.
- B. Monitor template customization is only a matter of preference, not an issue of effectiveness or performance.
- C. Most templates, such as https, should have the receive rule customized to make the monitor more robust.
- D. While some templates, such as ftp, must be customized, those that can be used without modification are not improved by specific changes.

Correct Answer: C

QUESTION 3

A BIG-IP Administrator creates a new VLAN on BIG-IP Cluster Member A and attaches an Interface to it. Although the Auto Config Sync is in place, the new VLAN does NOT show up on Cluster Member B. What should the BIG-IP Administrator do to ensure the new VLAN is configured on each Cluster Member?

- A. Configure the new VLAN manually on Cluster Member B.
- B. Reset the Device Trust of the BIG-IP Cluster on either Cluster Member.
- C. Configure a Default Route for the new VLAN on Cluster Member A.
- D. Enable the Interface that is attached to the new VLAN on Cluster Member A.

Correct Answer: A



QUESTION 4

A BIG-IP Administrator is creating a new Trunk on the BIG-IP device. What objects should be added to the new Trunk being created?


- A. Interfaces
- B. Network routes
- C. VLANS
- D. IP addresses

Correct Answer: A

trunk is a portchannel, you need to add a physical interface.

QUESTION 5

Refer to the exhibit.

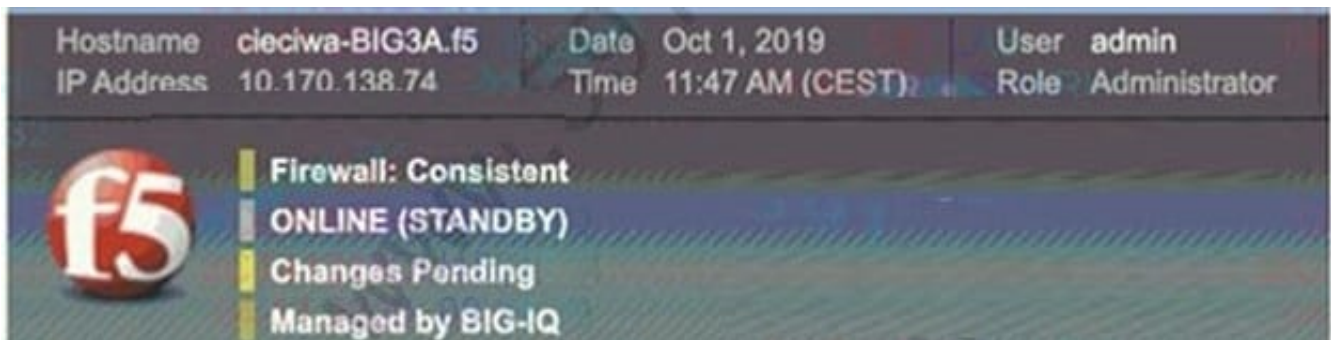

The BIG-IP Administrator has modified an iRule on one device of an HA pair. The BIG-IP Administrator notices there is NO traffic on the BIG-IP device in which they are logged into. What should the BIG-IP Administrator do to verify if the iRule works correctly?

- A. Push configuration from this device to the group and start to monitor traffic on this device
- B. Pull configuration to this device to the cluster and start to monitor traffic on this device
- C. Log in to the other device in the cluster, push configuration from it, and start to monitor traffic on that device
- D. Log in to the other device in the cluster, pull configuration to it, and start to monitor traffic on that device

Correct Answer: D

The device in the picture is a standby machine, of course there is no traffic, you need to log in to the host, and then pull the configuration to the host.