



300-207^{Q&As}

Implementing Cisco Threat Control Solutions

Pass Cisco 300-207 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/300-207.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which statement about Cisco IPS Manager Express is true?

- A. It provides basic device management for large-scale deployments.
- B. It provides a GUI for configuring IPS sensors and security modules.
- C. It enables communication with Cisco ASA devices that have no administrative access.
- D. It provides greater security than simple ACLs.

Correct Answer: B

QUESTION 2

If learning accept mode is set to "auto" and the knowledge base is loaded only when explicitly requested on the IPS, which statement about the knowledge base is true?

- A. The knowledge base is set to load dynamically.
- B. The knowledge base is set to "save only."
- C. The knowledge base is set to "discarded."
- D. The knowledge base is set to load statically.

Correct Answer: B

QUESTION 3

In addition to the CLI, what is another option to manage a Cisco IPS?

- A. SDEE
- B. Cisco SDM
- C. Cisco IDM
- D. Cisco ISE

Correct Answer: C

QUESTION 4

Over the period of one day, several Atomic ARP engine alerts fired on the same IP address. You observe that each time an alert fired, requests on the IP address exceeded replies by the same number. Which configuration could cause this behavior?



- A. The reply-ratio parameter is enabled.
- B. MAC flip is enabled.
- C. The inspection condition is disabled.
- D. The IPS is misconfigured.

Correct Answer: A

QUESTION 5



Scenario

In this simulation, you have access to the mail flow policies and sender groups configured on a Cisco Email Security Appliance. You are also provided the following list of fictional domains. SenderBase has records for one sender from each of these domains. The list provides the domain name and the SenderBase Reputation Score for the domain's sender.

Vt120.red.public, -6
orange.public, -4
yellow.public, -2
green.public, 2
blue.public, 6
violet.public, 8

Your task is to review the configuration on the Cisco Email Security Appliance, and then answer 5 multiple choice questions about the behavior of the Cisco Email Security Appliance given the configuration and the domain SenderBase Reputation Scores.

Instructions

Access the configuration of the Cisco Email Security Appliance using the MailFlowPolicies tab. Within the GUI, you can navigate between the HAT Overview and Mail Flow Policies tables. You can also navigate to the individual Mail Flow Policies and Sender Groups that are configured on the appliance.

Consider the configuration and the SenderBase Reputation Scores of the following fictitious domains when answering the 5 multiple choice questions.

- red.public, -6
- orange.public, -4
- yellow.public, -2
- green.public, 2
- blue.public, 6
- violet.public, 8

THIS TASK DOES NOT REQUIRE DEVICE CONFIGURATION.
Click on the MailFlowPolicies tab to access the device configuration.
To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.

Cisco C100V
Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending


Mail Flow Policies

Policies (Listener: IncomingMail 172.16.16.25:25)

Add Policy ...

Policy Name	Behavior	Delete
ACCEPTED	Accept	?
BLOCKED	Reject	🗑️
RELAYED	Relay	🗑️
THROTTLED	Accept	🗑️
TRUSTED	Accept	🗑️
Default Policy Parameters		

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement





Cisco Email Security Virtual Appliance

Monitor | Mail Policies | Security Services | Network | System Administration

HAT Overview No Changes Pending

Find Senders

Find Senders that Contain this Text:

Sender Groups (Listeners: IncomingMail 172.16.16.25:25)

Add Sender Group...

Order	Sender Group	SenderBase™ Reputation Score (?)	Mail Flow Policy	Delete
1	RELAYLIST		RELAYED	
2	WHITELIST		TRUSTED	
3	BLACKLIST		BLOCKED	
4	SUSPECTLIST		THROTTLED	
5	UNKNOWNLIST		ACCEPTED	
	ALL		ACCEPTED	

Key:

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support

Monitor | Mail Policies | Security Services | Network | System Administration

HAT Overview No Changes Pending

Find Senders

Find Senders that Contain this Text:

Sender Groups (Listeners: IncomingMail 172.16.16.25:25)

Add Sender Group...

Order	Sender Group	SenderBase™ Reputation Score (?)	Mail Flow Policy	Delete
1	RELAYLIST		RELAYED	
2	WHITELIST		TRUSTED	
3	BLACKLIST		BLOCKED	
4	SUSPECTLIST		THROTTLED	
5	UNKNOWNLIST		ACCEPTED	
	ALL		ACCEPTED	

Key:

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support

Monitor | Mail Policies | Security Services | Network | System Administration

Mail Flow Policies No Changes Pending


Policies (Listeners: IncomingMail 172.16.16.25:25)

Add Policy...

Policy Name	Behavior	Delete
ACCEPTED	Accept	
BLOCKED	Reject	
RELAYED	Relay	
THROTTLED	Accept	
TRUSTED	Accept	

Key:

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement





Cisco Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Mail Flow Policy: ACCEPTED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name:

Connection Behavior:

Connections:

- Max. Messages Per Connection: Use Default (10)
- Max. Recipients Per Message: Use Default (50)
- Max. Message Size: Use Default (10M)
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10)

SMTP:

- Custom SMTP Banner Code: Use Default (220)
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface) Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited) Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Cisco C100V Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

logged in as: admin on esa.secure-x.local

Home Favorites Options Help and Support

No Changes Pending

Mail Flow Policy: ACCEPTED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name:

Connection Behavior:

Connections:

- Max. Messages Per Connection: Use Default (10)
- Max. Recipients Per Message: Use Default (50)
- Max. Message Size: Use Default (10M)
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10)

SMTP:

- Custom SMTP Banner Code: Use Default (220)
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface) Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited) Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Navigation Menu:

- Email Security Manager
 - Incoming Mail Policies
 - Incoming Content Filters
 - Outgoing Mail Policies
 - Outgoing Content Filters
- Host Access Table (HAT)
 - HAT Overview
 - Mail Flow Policies
 - Exception Table
 - Address Lists
- Recipient Access Table (RAT)
 - Destination Controls
 - Bounce Verification
- Data Loss Prevention (DLP)
 - DLP Policy Manager
 - DLP Message Actions
- Domain Keys
 - Verification Profiles
 - Signing Profiles
 - Signing Keys
- Text Resources
 - Dictionaries





Cisco Email Security Virtual Appliance

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: BLACKLIST - IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	BLACKLIST
Order:	3
Comment:	Spammers are rejected
Policy:	BLOCKED
SBRS (Optional):	-10.0 to -3.0
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview | Edit Settings...

Find Senders

Find Senders that Contain this Text: Find

Sender List: Display All Items in List

Add Sender...

There are no senders.

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: BLACKLIST - IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	BLACKLIST
Order:	3
Comment:	Spammers are rejected
Policy:	BLOCKED
SBRS (Optional):	-10.0 to -3.0
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview | Edit Settings...

Find Senders

Find Senders that Contain this Text: Find


Sender List: Display All Items in List

Add Sender...

There are no senders.

- Email Security Manager
 - Incoming Mail Policies
 - Incoming Content Filters
 - Outgoing Mail Policies
 - Outgoing Content Filters
- Host Access Table (HAT)
 - HAT Overview
- Mail Flow Policies
- Exception Table
- Address Lists
- Recipient Access Table (RAT)
- Destination Controls
- Bounce Verification
- Data Loss Prevention (DLP)
 - DLP Policy Manager
 - DLP Message Actions
- Domain Keys
 - Verification Profiles
 - Signing Profiles
 - Signing Keys
- Text Resources
- Dictionaries

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement





Cisco Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Mail Flow Policy: BLOCKED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name:

Connection Behavior:

Connections:

- Max. Messages Per Connection: Use Default (10)
- Max. Recipients Per Message: Use Default (50)
- Max. Message Size: Use Default (10M)
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10)

SMTP:

- Custom SMTP Banner Code: Use Default (554)
- Custom SMTP Banner Text: Use Default ()
 Your access to this mail system has been rejected due to the sending MTA's poor reputation. If you believe that this failure
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface)
 Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited)
 Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Cisco C100V Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

No Changes Pending

Mail Flow Policy: BLOCKED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name:

Connection Behavior:

Connections:

- Max. Messages Per Connection: Use Default (10)
- Max. Recipients Per Message: Use Default (50)
- Max. Message Size: Use Default (10M)
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10)

SMTP:

- SMTP Banner Code: Use Default (554)
- SMTP Banner Text: Use Default ()
 Your access to this mail system has been rejected due to the sending MTA's poor reputation. If you believe that this failure
- SMTP Banner Hostname: Use Default (Use Hostname from Interface)
 Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited)
 Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Navigation Menu:

- Email Security Manager
 - Incoming Mail Policies
 - Incoming Content Filters
 - Outgoing Mail Policies
 - Outgoing Content Filters
 - Host Access Table (HAT)
 - HAT Overview
 - Mail Flow Policies
 - Exception Table
 - Address Lists
 - Recipient Access Table (RAT)
 - Destination Controls
 - Bounce Verification
 - Data Loss Prevention (DLP)
 - DLP Policy Manager
 - DLP Message Actions
 - Domain Keys
 - Verification Profiles
 - Signing Profiles
 - Signing Keys
 - Text Resources
 - Dictionaries





Cisco Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Mail Flow Policy: RELAYED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name:

Connection Behavior:

Connections:

- Max. Messages Per Connection: Use Default (10)
- Max. Recipients Per Message: Use Default (50)
- Max. Message Size: Use Default (10M)
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10)

SMTP:

- Custom SMTP Banner Code: Use Default (220)
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface) Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited) Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Cisco C100V Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

No Changes Pending

Mail Flow Policy: RELAYED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name:

Connection Behavior:

Connections:

- Max. Messages Per Connection: Use Default (10)
- Max. Recipients Per Message: Use Default (50)
- Max. Message Size: Use Default (10M)
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10)

SMTP:


- Custom SMTP Banner Code: Use Default (220)
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface) Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited) Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

[Email Security Manager](#)
[Incoming Mail Policies](#)
[Incoming Content Filters](#)
[Outgoing Mail Policies](#)
[Outgoing Content Filters](#)
[Host Access Table \(HAT\)](#)
[HAT Overview](#)
[Mail Flow Policies](#)
[Exception Table](#)
[Address Lists](#)
[Recipient Access Table \(RAT\)](#)
[Destination Controls](#)
[Bounce Verification](#)
[Data Loss Prevention \(DLP\)](#)
[DLP Policy Manager](#)
[DLP Message Actions](#)
[Domain Keys](#)
[Verification Profiles](#)
[Signing Profiles](#)
[Signing Keys](#)
[Text Resources](#)
[Dictionaries](#)





Cisco Email Security Virtual Appliance

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: RELAYLIST - IncomingMail 172.16.16.25:25

Sender Group Settings

Name:	RELAYLIST
Order:	1
Comment:	Only select hosts can relay from this box
Policy:	RELAYED
SBRS (Optional):	Not in use
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview Edit Settings...

Find Senders

Find Senders that Contain this Text: Find

Sender List: Display All Items in List Items per page: 20

Add Sender...

Sender	Comment	All Delete
hq-mail.maroon.public	None	<input type="checkbox"/>

<< Back to HAT Overview Delete

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: RELAYLIST - IncomingMail 172.16.16.25:25

Sender Group Settings

Name:	RELAYLIST
Order:	1
Comment:	Only select hosts can relay from this box
Policy:	RELAYED
SBRS (Optional):	Not in use
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview Edit Settings...

Find Senders

Find Senders that Contain this Text: Find

Sender List: Display All Items in List Items per page: 20

Add Sender...


Sender	Comment	All Delete
hq-mail.maroon.public	None	<input type="checkbox"/>

<< Back to HAT Overview Delete

Email Security Manager

- Incoming Mail Policies
- Incoming Content Filters
- Outgoing Mail Policies
- Outgoing Content Filters
- Host Access Table (HAT)**
 - HAT Overview
 - Mail Flow Policies
 - Exception Table
 - Address Lists
- Recipient Access Table (RAT)
- Destination Controls
- Bounce Verification
- Data Loss Prevention (DLP)**
 - DLP Policy Manager
 - DLP Message Actions
- Domain Keys**
 - Verification Profiles
 - Signing Profiles
 - Signing Keys
 - Text Resources
 - Dictionaries

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement





Cisco Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Sender Group: SUSPECTLIST - IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	SUSPECTLIST
Order:	4
Comment:	Suspicious senders are throttled
Policy:	THROTTLED
SBRS (Optional):	-3.0 to 3.0
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview Edit Settings...

Find Senders

Find Senders that Contain this Text: Find

Sender List: Display All Items in List

Add Sender...

There are no senders.

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Sender Group: IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	SUSPECTLIST
Order:	4
Comment:	Suspicious senders are throttled
Policy:	THROTTLED
SBRS (Optional):	-3.0 to 3.0
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview Edit Settings...

Find Senders

Find Senders that Contain this Text: Find


Sender List: Display All Items in List

Add Sender...

There are no senders.

- Email Security Manager
 - Incoming Mail Policies
 - Incoming Content Filters
 - Outgoing Mail Policies
 - Outgoing Content Filters
- Host Access Table (HAT)
 - HAT Overview
 - Mail Flow Policies
 - Exception Table
 - Address Lists
- Recipient Access Table (RAT)
 - Destination Controls
 - Bounce Verification
- Data Loss Prevention (DLP)
 - DLP Policy Manager
 - DLP Message Actions
- Domain Keys
 - Verification Profiles
 - Signing Profiles
 - Signing Keys
- Text Resources
 - Dictionaries

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement





Cisco Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Mail Flow Policy: THROTTLED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name: THROTTLED

Connection Behavior: Accept

Connections:

- Max. Messages Per Connection: Use Default (10) 1
- Max. Recipients Per Message: Use Default (50) 25
- Max. Message Size: Use Default (10M) 10485760
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10) 1

SMTP:

- Custom SMTP Banner Code: Use Default (220) 220
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface)
 Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited)
 Unlimited
 20
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Cisco C100V Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

logged in as: admin on esa.secure-x.local
My Favorites Options Help and Support

No Changes Pending

Mail Flow Policy: THROTTLED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name: THROTTLED

Connection Behavior: Accept

Connections:

- Max. Messages Per Connection: Use Default (10) 1
- Max. Recipients Per Message: Use Default (50) 25
- Max. Message Size: Use Default (10M) 10485760
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10) 1

SMTP:

- Custom SMTP Banner Code: Use Default (220) 220
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface)
 Use Hostname from Interface

Mail Flow Limits

Rate Limit for Hosts:

- Max. Recipients Per Hour: Use Default (Unlimited)
 Unlimited
 20
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Host Access Table (HAT)

- HAT Overview
- Mail Flow Policies
- Exception Table
- Address Lists
- Recipient Access Table (RAT)
- Destination Controls
- Bounce Verification
- Data Loss Prevention (DLP)
- DLP Policy Manager
- DLP Message Actions
- Domain Keys
- Verification Profiles
- Signing Profiles
- Signing Keys
- Text Resources
- Dictionaries





Cisco Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

No Changes Pending

Mail Flow Policy: TRUSTED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name: TRUSTED

Connection Behavior: Accept

Connections:

- Max. Messages Per Connection: Use Default (10) 5000
- Max. Recipients Per Message: Use Default (50) 5000
- Max. Message Size: Use Default (10M) 104857600
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10) 300

SMTP:

- Custom SMTP Banner Code: Use Default (220) 220
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface)
 Use Hostname from Interface

Mail Flow Limits

- Rate Limit for Hosts: Max. Recipients Per Hour: Use Default (Unlimited)
 Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Cisco C100V Email Security Virtual Appliance

Monitor Mail Policies Security Services Network System Administration

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

No Changes Pending

Mail Flow Policy: TRUSTED - IncomingMail 172.16.16.25:25

Edit Policy Settings

Name: TRUSTED

Connection Behavior: Accept

Connections:

- Max. Messages Per Connection: Use Default (10) 5000
- Max. Recipients Per Message: Use Default (50) 5000
- Max. Message Size: Use Default (10M) 104857600
(add a trailing K for kilobytes; M for megabytes)
- Max. Concurrent Connections From a Single IP: Use Default (10) 300

SMTP:

- Custom SMTP Banner Code: Use Default (220) 220
- Custom SMTP Banner Text: Use Default ()
- Override SMTP Banner Hostname: Use Default (Use Hostname from Interface)
 Use Hostname from Interface

Mail Flow Limits

- Rate Limit for Hosts: Max. Recipients Per Hour: Use Default (Unlimited)
 Unlimited
- Max. Recipients Per Hour Code: Use Default (452)
- Max. Recipients Per Hour Text: Use Default (Too many recipients received this hour)

Navigation Menu:

- Email Security Manager
 - Incoming Mail Policies
 - Incoming Content Filters
 - Outgoing Mail Policies
 - Outgoing Content Filters
- Host Access Table (HAT)
 - HAT Overview
 - Mail Flow Policies
 - Exception Table
 - Address Lists
- Recipient Access Table (RAT)
 - Destination Controls
 - Bounce Verification
- Data Loss Prevention (DLP)
 - DLP Policy Manager
 - DLP Message Actions
- Domain Keys
 - Verification Profiles
 - Signing Profiles
 - Signing Keys
- Text Resources
 - Dictionaries





Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: UNKNOWNLIST - IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	UNKNOWNLIST
Order:	5
Comment:	Reviewed but undecided, continue normal acceptance
Policy:	ACCEPTED
SBRS (Optional):	3.0 to 10.0 and SBRS Scores of "None"
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview | Edit Settings...

Find Senders

Find Senders that Contain this Text: Find

Sender List: Display All Items in List

Add Sender...

There are no senders.

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V
Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: UNKNOWNLIST - IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	UNKNOWNLIST
Order:	5
Comment:	Reviewed but undecided, continue normal acceptance
Policy:	ACCEPTED
SBRS (Optional):	3.0 to 10.0 and SBRS Scores of "None"
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview | Edit Settings...

Find Senders

Find Senders that Contain this Text: Find

Sender List: Display All Items in List

Add Sender...

There are no senders.

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement

Cisco C100V
Email Security Virtual Appliance

Logged in as: admin on esa.secure-x.local
My Favorites - Options - Help and Support -

Monitor | Mail Policies | Security Services | Network | System Administration

No Changes Pending

Sender Group: WHITELIST - IncomingMail 172.16.16.25:25

Sender Group Settings	
Name:	WHITELIST
Order:	2
Comment:	My trusted senders have no anti-spam scanning or rate limiting
Policy:	TRUSTED
SBRS (Optional):	Not in use
DNS Lists (Optional):	None
Connecting Host DNS Verification:	None Included

<< Back to HAT Overview | Edit Settings...

Find Senders

Find Senders that Contain this Text: Find


Sender List: Display All Items in List

Add Sender...

Sender	Comment	All	Delete
.orange.public	None	<input type="checkbox"/>	<input type="checkbox"/>

<< Back to HAT Overview | Delete

Copyright © 2003-2013 Cisco Systems, Inc. All rights reserved. | Privacy Statement





What is the maximum message size that the Cisco Email Security Appliance will accept from the violet.public domain?

- A. 1 KB
- B. 100 KB
- C. 1 MB
- D. 10 MB
- E. 100 MB
- F. Unlimited

Correct Answer: D

Explanation:

From the instructions we know that the reputation score for the violet.public domain has been set to 8. From the HAT table shown below we know that a score of 8 belongs to the UNKNOWNLIST group, which is assigned the ACCEPTED policy.



The screenshot shows the Cisco C100V HAT Overview page. The top navigation bar includes Monitor, Mail Policies, Security Services, Network, and System Administration. The main content area is titled "HAT Overview" and contains a "Find Senders" search bar. Below this is a "Sender Groups" section for the listener "IncomingMail 172.16.16.25:25". A table lists five sender groups with their respective mail flow policies and reputation scores. The "ALL" group is highlighted in yellow, and its policy is "ACCEPTED".

Order	Sender Group	SenderBase™ Reputation Score	Mail Flow Policy	Delete
1	RELAYLIST		RELAYED	
2	WHITELIST		TRUSTED	
3	BLACKLIST		BLOCKED	
4	SUSPECTLIST		THROTTLED	
5	UNKNOWNLIST		ACCEPTED	
	ALL		ACCEPTED	

By clicking on the ACCEPTED policy we see that max message size has been set to the default value of 10M:



The screenshot shows the Cisco Email Security Virtual Appliance configuration interface. The page title is "Mail Flow Policy: ACCEPTED - IncomingMail 172.16.16.25:25". The navigation menu includes Monitor, Mail Policies, Security Services, Network, and System Administration. The "Edit Policy Settings" section is active, showing the following configuration:

Category	Setting	Value
Name	Name:	ACCEPTED
Connection Behavior	Connection Behavior:	Accept
Connections	Max. Messages Per Connection:	Use Default (10)
	Max. Recipients Per Message:	Use Default (50)
	Max. Message Size:	Use Default (10M)
	Max. Concurrent Connections From a Single IP:	Use Default (10)
SMTP	Custom SMTP Banner Code:	Use Default (220)
	Custom SMTP Banner Text:	Use Default ()
	Override SMTP Banner Hostname:	Use Default (Use Hostname from Interface)

[Latest 300-207 Dumps](#)

[300-207 VCE Dumps](#)

[300-207 Exam Questions](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !


- 100% Guaranteed Success
- 100% Money Back Guarantee
- 365 Days Free Update
- Instant Download After Purchase
- 24x7 Customer Support
- Average 99.9% Success Rate
- More than 800,000 Satisfied Customers Worldwide
- Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.geekcert.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

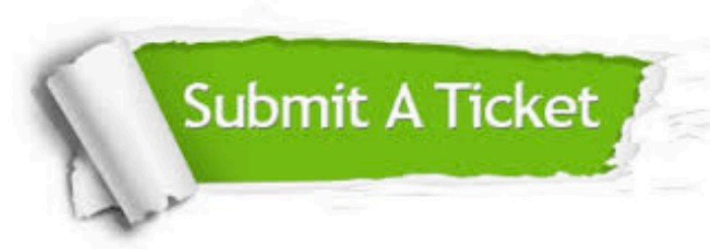

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © geekcert, All Rights Reserved.