300-320^{Q&As}

Designing Cisco Network Service Architectures

Pass Cisco 300-320 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/300-320.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

365 Days Free Update

800,000+ Satisfied Customers

QUESTION 1

An engineer is integrating a recently acquired company\\\'s network that has overlapping IP address space. Users of the new acquisition must have access to corporate applications. Which action is the most efficient way to provide this access?

A. Build 1-to-1 NAT translation for users that need access.

B. Re-IP overlapping address space in the acquired company.

C. Use a single IP address to create overload NAT.

D. Create NAT translation by utilizing a pool of NAT IP addresses.

Correct Answer: D

QUESTION 2

An engineering team must allow communications between a new two-tier application in a Cisco Application-Centric Infrastructure environment.

Which two elements must be configured to allow communications between two endpoint groups that represents the application? (Choose two.)

A. context

B. filter

C. access control list

D. contract

E. route map

Correct Answer: AB

QUESTION 3

You need to use source specific multicast, which addressing should you use ?

A. 224.0.0.0/8

B. 232.0.0.0/8

C. 248.0.0.0/8

D. 254.0.0.0/8

E. 242.0.0.0/8

Correct Answer: B

QUESTION 4

In which NAS operating mode are ACL filtering and bandwidth throttling only provided during posture assessment?

A. Layer 2

B. Layer 3

C. in-band

D. out-of-band

E. edge

F. central

Correct Answer: D

https://www.safaribooksonline.com/library/view/foundation-learning-guide/9780132652933/ch06.html "In out-of-band traffic flow, the Cisco NAS is in the traffic path only during the posture assessment. Out-of-band mode provides VLAN port-based and role-based access control. ACL filtering and bandwidth throttling are provided only during posture assessment."

QUESTION 5

Two Cisco switches with 1 SUP and many 10G line-card ports for each switch, run in VSS mode. Why don\\'t connect all VSL to SUP (Choose 1)

A. The SUP diversity...

B. Bandwidth congestion at SUP

C. Pending

D. Qos must be configured on both

Correct Answer: A

[300-320 PDF Dumps](#)   [300-320 VCE Dumps](#)   [300-320 Study Guide](#)

To Read the Whole Q&As, please purchase the Complete Version from Our website.
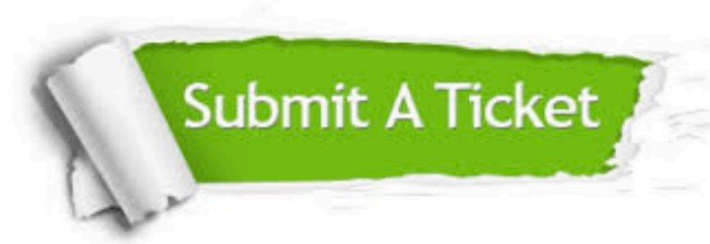
Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.geekcert.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: