



350-401^{Q&As}

Implementing and Operating Cisco Enterprise Network Core Technologies (ENCOR)

Pass Cisco 350-401 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/350-401.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibit.

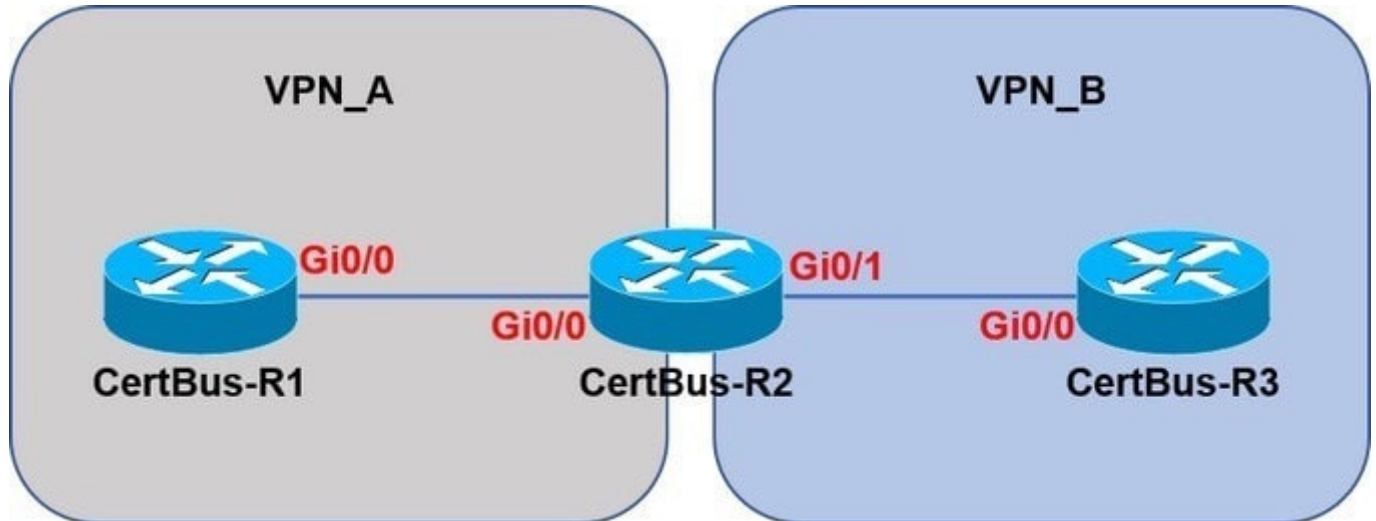

Assuming that R1 is a CE router, which VRF is assigned to Gi0/0 on R1?

- A. VRF VPN_B
- B. Default VRF
- C. Management VRF
- D. VRF VPN_A

Correct Answer: B

There is nothing special with the configuration of Gi0/0 on R1. Only Gi0/0 interface on R2 is assigned to VRF VPN_A. The default VRF here is similar to the global routing table concept in Cisco IOS

QUESTION 2

Which resource must the hypervisor make available to the virtual machines?

- A. bandwidth
- B. IP address
- C. processor
- D. secure access

Correct Answer: C



QUESTION 3

Which unit is used to express the signal-to-noise ratio?

- A. mW
- B. db
- C. amp
- D. dbm

Correct Answer: B

Signal-to-noise ratio (SNR or S/N) is the ratio of signal power to the noise power, and its unit of expression is typically decibels (dB).

QUESTION 4

Which action limits the total amount of memory and CPU that is used by a collection of VMs?

- A. Place the collection of VMs in a resource pool.
- B. Place the collection of VMs in a vApp.
- C. Limit the amount of memory and CPU that is available to the cluster.
- D. Limit the amount of memory and CPU that is available to the individual VMs.

Correct Answer: A

QUESTION 5

In a Cisco SD-Access fabric architecture, which of the following are valid device roles (Choose three.)

- A. Control Plane Node
- B. Access routing device
- C. Edge Node
- D. Border Node
- E. Distributed Node

Correct Answer: ACD