350-501^{Q&As}

Implementing and Operating Cisco Service Provider Network Core Technologies (SPCOR)

Pass Cisco 350-501 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/350-501.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

When Cisco IOS XE REST API uses HTTP request methods what is the purpose of a PUT request?

A. retrieves the specified resource or representation

B. submits data to be processed to the specified resource

C. updates the specified resource with new information

D. creates a new resource

Correct Answer: C

QUESTION 2
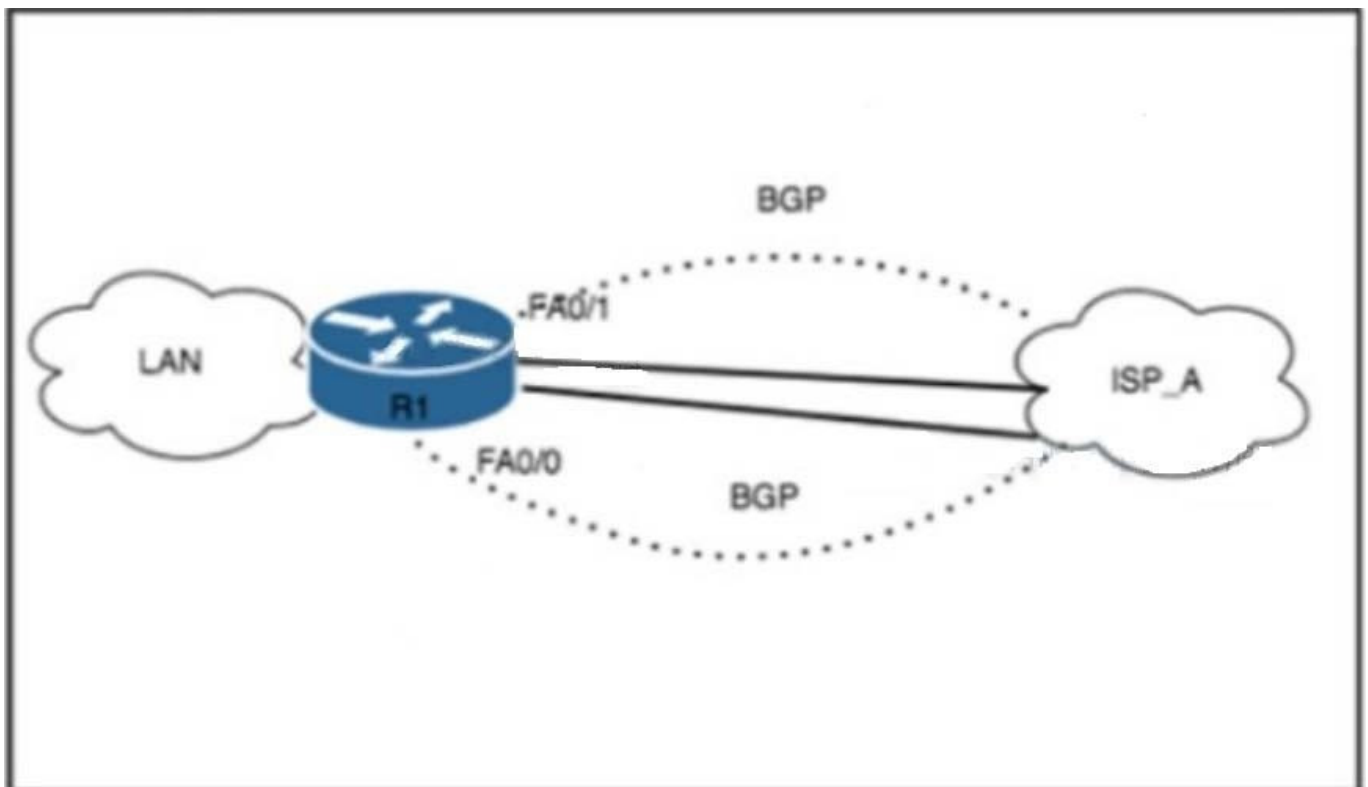
Refer to the exhibit. A network engineer must deny access from spoofed addresses to the LAN. The edge router currently has two active BGP sessions established with Tier 1 ISP_A. Due to asymmetric routing, no ACL is configured on either interface. Which two configurations must the engineer perform on the edge router to complete the task? (Choose two.)

A. ip verify unicast source reachable-via tx under FA0/0

B. ip verify unicast source reachable-via under FA0/1

C. ip verify unicast source reachable-via any under FA0/1

D. ip verify unicast source reachable-via both under FA0/0

E. ip verify unicast source reachable-via any under FA0/0

Correct Answer: CE

QUESTION 3

A layer 2 aggregation deployed via IEEE 802.1D has many nodes on a single link A DHCP version 6 server cannot recognize how the clients are attached to a network, Which solution provides a client identification to the DHCPv6 in this scenario?

A. LDRA

B. DHCPv6 relay agent

C. DHCP snooping

D. Broadband Forum Trunk N:1

Correct Answer: A

QUESTION 4

Which action does the ingress VTEP perform on traffic between EVPN VXLAN overlays?

A. routing and tunneling when doing symmetric IRB

B. routing when doing asymmetric IRB

C. routing and bridging when doing asymmetric IRB

D. bridging when doing symmetric IRB

Correct Answer: C

https://www.cisco.com/c/en/us/products/collateral/switches/nexus-9000-series-switches/guide-c07-734107.html

QUESTION 5

Which protocol is used to convey configuration information to cable modems in a DOCSIS network?

A. DHCP

B. RPC

C. NETCONF

D. TFTP

Correct Answer: D