



# 350-601<sup>Q&As</sup>

Implementing and Operating Cisco Data Center Core Technologies  
(DCCOR)

**Pass Cisco 350-601 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/350-601.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1


Which two actions should be performed before upgrading the infrastructure and firmware of multiple UCS blades?  
(Choose two)

- A. Verify if the bootflash on the fabric interconnects in the Cisco UCS has at least 15% available space
- B. Enable Smart Call Home feature during the firmware upgrade process
- C. Verify if the bootflash on the fabric interconnects in the Cisco UCS has at least 10% available space
- D. Run the Check Conformance feature to verify that all your components are running the compatible firmware version after the upgrade
- E. Get Full State and All Configuration backup files before beginning the upgrade

Correct Answer: DE

### QUESTION 2

Refer to the exhibit.

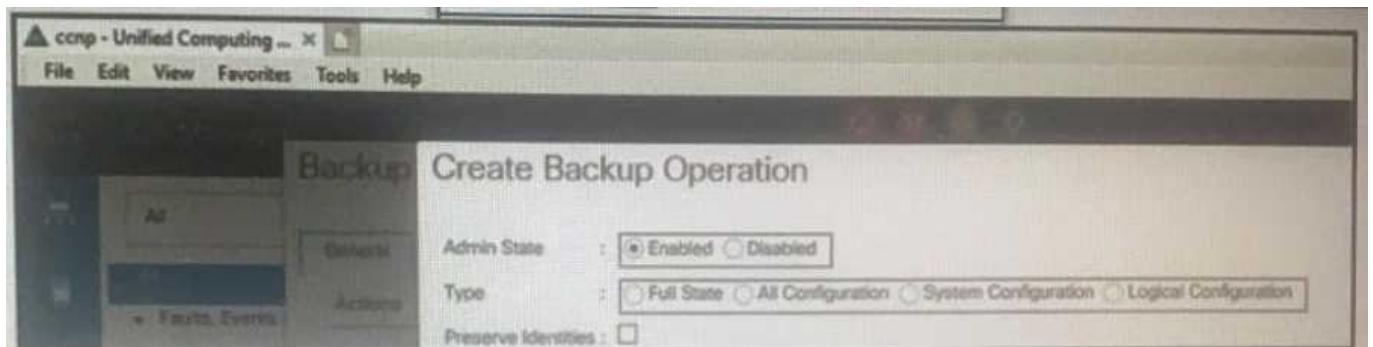

Which backup operation type not include the preserve identities feature?

- A. Full state
- B. Logical configuration
- C. System configuration
- D. All configuration

Correct Answer: A

### QUESTION 3

Refer to the exhibit.



```
rollback running-config checkpoint system-fm-vpc output-omitted
```

A network engineer is implementing a configuration checkpoint on a Cisco Nexus 9000 Series Switch. The configuration must skip any existing vPC configuration errors and must complete it there are any configuration errors. The engineer finished the vPC domain configuration part.

Which command completes the checkpoint implementation?

- A. best-effort
- B. stop-at-first-failure
- C. atomic
- D. verbose

Correct Answer: A

#### QUESTION 4

DRAG DROP

An engineer must recover configuration on a Cisco MDS 9000 Series switch from a previous version that was backed up to bootflash and then verify the restoration.

Drag and drop the commands on the left to the correct order on the right.

Select and Place:

copy bootflash:<conrfiguration_file> runring-config	Step 1
copy running-config startup-config	Step 2
show startup-config	Step 3
write erase	Step 4
reload	Step 5

Correct Answer:



	write erase
	reload
	copy bootflash:<configuration_file> running-config
	copy running-config startup-config
	show startup-config

**QUESTION 5**

An engineer must perform a nondisruptive software upgrade on a dual supervisor Cisco Nexus 7000 series switch. What is the cause of the upgrade being disruptive?

- A. The show install all impact command is not issued Before the upgrade
- B. The kickstart image is installed by using the install all kickstart image system image command
- C. Attempt to simultaneously upgrade more than three cards
- D. Change of the configuration settings or the network connections during the upgrade process

Correct Answer: D

[350-601 PDF Dumps](#)

[350-601 VCE Dumps](#)

[350-601 Braindumps](#)