https://www.geekcert.com/351-080.html
GeekCert.com

351-080^{Q&As}

CCIE Data Center Written

Pass Cisco 351-080 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/351-080.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Which three statements about the system port profiles are true? (Choose three)

A. A system port profile cannot be converted to a port profile that is not a system port profile.

B. System VLANs cannot be added to a port profile.

C. In a single ESX host, one VLAN can be a system VLAN on one port but a regular VLAN on another.

D. A system port profile must be converted to a port profile that is not a system port profile.

E. The native VLAN on a system port profile cannot be a system VLAN.

F. A system port profile must be of the Ethernet type because it is used for physical ports.
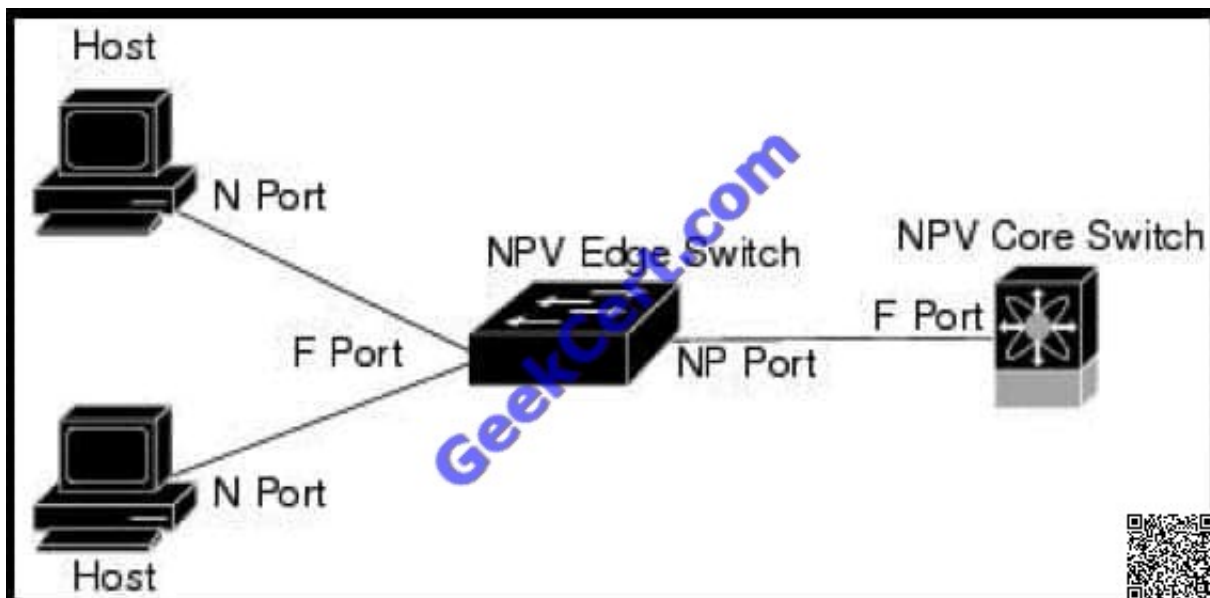
Correct Answer: ACF

Ref:http://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus1000/sw/4_2_1_s_v_1
_4/port_profile/configuration/guide/n1000v_port_profile/n1000v_portprof_4system.html#wp xref25626

PFC

QUESTION 2

Refer to the exhibit.

Which statement about the interface that is connected to the NPV core switch is true?

A. The switch that connects to the hosts is identified in the design as an NPV edge switch, and the port that connects to the core is an NP port.

B. The interface that is connected to the NPV switch will need to be configured as an N- Port.

C. The interface that is connected to the NPV core will become an FP port.

D. The link between the NPV core switch and edge will come up as an E port.

Correct Answer: A

QUESTION 3

The FCoE VLAN is used to carry FIP and FCoE traffic for the corresponding VSAN. Which two statements about this mapping are true? (Choose two.)

A. The VLAN-VSAN mapping must be configured consistently in the entire fabric.

B. This mapping can only carry Fibre Channel control and data traffic.

C. There must be same VLANs on the A and B SANs.

D. IP traffic is allowed if the interface is set to Shared.

E. The VLAN must match the CNA setting.

Correct Answer: AB

QUESTION 4

Which command sends a tet call home inventory message to start the registration process.

A. test callhome inventory

B. callhome inventory test

C. callhome test inventory D. test inventory callhome

Correct Answer: C

QUESTION 5

Which three options are key characteristics of the data center core layer in a three-tier architecture? (Choose three.)

A. Provides scalability

B. Used to enforce network security

C. Performs Qos marking

D. Provides connectivity to distribution layer

E. Performs policing

F. High availability

Correct Answer: ADF

Ref:http://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Data_Center/DC_Infra2_5/D CInfra_1.html

351-080 PDF Dumps   351-080 Study Guide   351-080 Exam Questions

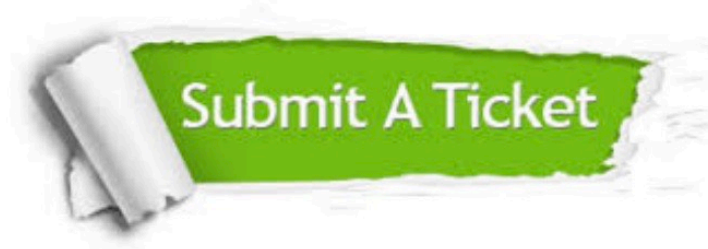To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.geekcert.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: