



352-001^{Q&As}

CCDE Written Exam

Pass Cisco 352-001 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/352-001.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Your design plan includes mutual redistribution of two OSPF networks at multiple locations, with connectivity to all locations in both networks. How is this accomplished without creating routing loops?

- A. Use route maps on the ASBRs to allow only internal routes to be redistributed.
- B. Use route maps on the ASBRs to allow internal and external routes to be redistributed.
- C. Use route maps on the ASBRs to set tags for redistributed routes.
- D. Use route maps on the ASBRs to filter routes with tags so they are not redistributed.

Correct Answer: D

QUESTION 2

Which two mechanisms can provide fast Layer 2 down detection in Frame Relay networks? (Choose two.)

- A. asynchronous LMI
- B. millisecond LMI timers
- C. A-bit signaling
- D. Frame BFD Lite
- E. section 9 LMI convergence

Correct Answer: AC

QUESTION 3

Which two IoT use cases require the low latency and high reliability that 5G networks provide?


- A. Smart Home
- B. Automotive
- C. Health and Wellness
- D. Smart Cities
- E. Sports and Fitness

Correct Answer: BC

QUESTION 4



Refer to the exhibit.

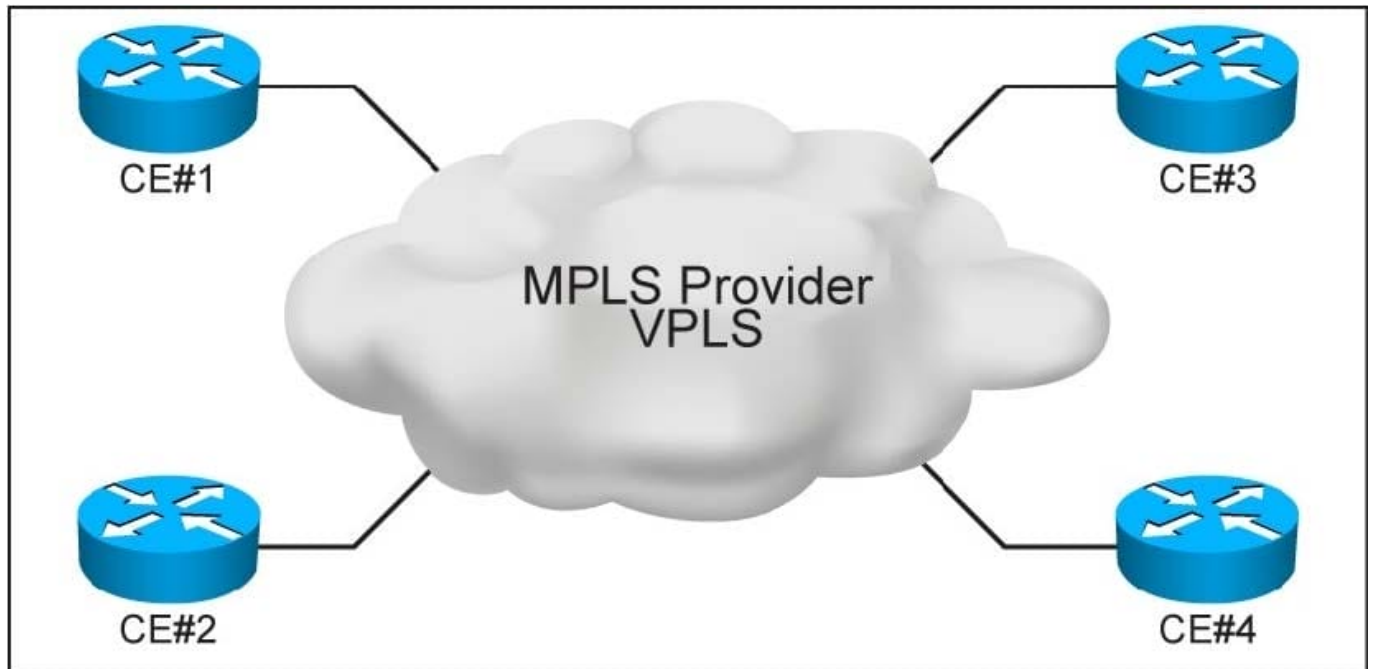

Four customer sites are connected through an EoMPLS-based VPLS over an MPLS provider. You are migrating from OSPF to multi-level IS-IS as the routing protocol to run on the four CE routers, and connectivity between all four sites is required. You want to control which CE or CEs will be elected as the Designated Intermediate System. Which two key aspects should be taken into account? (Choose two.)

- A. The DIS role for Level1 and Level2 can be performed by different routers.
- B. The CE with the second highest priority will be elected as the backup DIS on the LAN segment.
- C. One of the CE routers will be elected as the DIS based on interface priority then highest MAC address.
- D. It is recommended to use point-to-point link type on the CEs.
- E. If a new CE router is added to the VPLS cloud with a lower interface priority it will become the DIS.

Correct Answer: AC

QUESTION 5

There is an MPLS-enabled link constantly flapping on an MPLS VPN network. Given that the network runs OSPF as the IGP protocol, which design mechanism will stabilize the network and avoid constant re-convergence?

- A. IP Event Dampening
- B. OSPF fast hellos
- C. IP SLA
- D. Partial SPF

Correct Answer: A



VCE & PDF

GeekCert.com

<https://www.geekcert.com/352-001.html>

2024 Latest geekcert 352-001 PDF and VCE dumps Download

[352-001 VCE Dumps](#)

[352-001 Practice Test](#)

[352-001 Braindumps](#)