



# 3605<sup>Q&As</sup>

Avaya Ethernet Routing Switch Implementation and Maintenance Exam

## Pass Avaya 3605 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/3605.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Avaya  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Config mlt 1 create name "MLT to Core" Config rmlt 1 add ports 3/8, 4/8 Config mlt 1 add vlan 1 Config mlt 1 perform-tagging enable ho mlt info 1


To add more links to this MLT setup at a later date, what needs to be provisioned?

- A. Create a new VLAN and add the new VLAN to the MLT.
- B. More ports cannot be added because only a total of two can be aggregated to the core device.
- C. once the MLT is enabled and working, more ports cannot be added to the link aggregation
- D. Associate the new ports to the same settings as the current MLT ports; then add them to the MLT.

Correct Answer: D

### QUESTION 2

Refer to the exhibit.

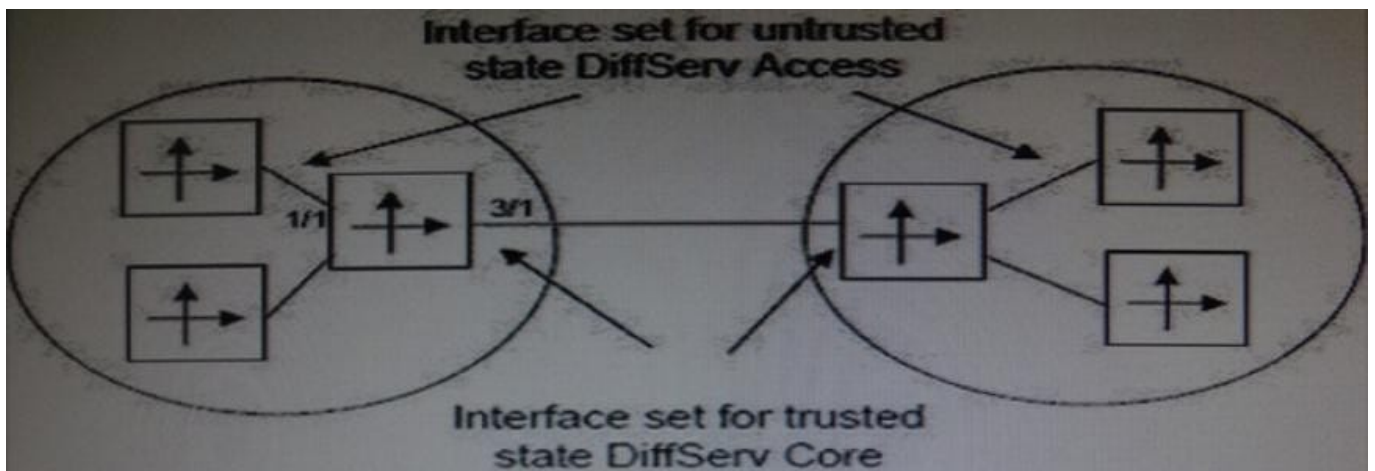

Which commands will configure the labeled Ethernet ports shown in the exhibit correctly?

- A. config ethernet 3/1 enable-diffserv trueconfig ethernet 1/1 access-diffserv true
- B. config ethernet 1/1 access-diffserv trueconfig ethernet 1/1 access-diffserv true
- C. config ethernet 1/1, 3/1 enable-diffserv trueconfig ethernet 1/1 access-diffserv true
- D. config ethernet 1/1, 3/1 enable-diffserv trueconfig ethernet 3/1 access-diffserv true

Correct Answer: C

### QUESTION 3



An Information Technology organization needs to determine whether they should upgrade their existing Routing Switch (ERS) 8600 switches to release 5.0. Each chassis currently has both 8648GTR 8648TX modules. One of the features that the company requires is the ability to perform port mirroring on multiple ports per module at a time.

What should be done to meet their port mirroring requirement when upgrading to software release 5.0?

- A. Replace the existing modules with 8648GTRS modules,
- B. Upgrade to ERS 8600 Release 5.0 without any hardware upgrade.
- C. Replace the existing 8648TX modules with ERS 8648TXE for egress mirroring.
- D. Recommend other means to capturing traffic.

Correct Answer: A

---

#### QUESTION 4

The attempt to manage an Ethernet Routing Switch (ERS) 8000 using a Virtual Route Redundancy Protocol (VRRP) address was not successful. What is causing this problem?

- A. The virtual router identifier is 0.
- B. The data center interface is set as a critical IP interface.
- C. A real IP address is required for management access not a VRRP address.
- D. The virtual router identifier is configured for the VRRP IP address owner.

Correct Answer: C

---

#### QUESTION 5

You are configuring a QoS Policy on an ERS RS or 8800 module to police the ingress data rate on a port with the following ACLI command on the interface level: qos if-policer police-rate 10000. What other two ACLI commands are required on the edge interface? (Choose two.)

- A. (config)#interface qos enable.
- B. (config-if)#enable-diffserv enable.
- C. (config-if)#access-diffserv enable.
- D. (config-if)#no core-diffserv enable.

Correct Answer: BC