



3605^{Q&As}

Avaya Ethernet Routing Switch Implementation and Maintenance Exam

Pass Avaya 3605 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/3605.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Avaya
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

A technician is adding the Virtual link Aggregation Control Protocol (VLACP) configuration to a Converged Campus Solution where all Ethernet Routing Switches

(ERSs) are directly connected without intermediary WAN transport devices.

What are two recommended configuration tasks? (Choose two.)

- A. Configure all links to use the same timeout value.
- B. For the Inter Switch Trunks (1ST) links, configure the long time-out value.
- C. For the SMLT links, configure the long timeout value.
- D. Configure all links to use a global reserved multicast MAC address for VLACP messages.

Correct Answer: BD

QUESTION 2

A customer is upgrading an existing ERS 8610 with the 8692SF to software version 7.x. Which statement regarding the upgrade is correct?

- A. The customer must upgrade the 8692SF to an 8893SF for software release 7.x.
- B. The customer can run 7.x with the existing 8692SF, although some features will be disabled.
- C. The customer can add the SuperMezz module to the 8692SF and run release 7.x.
- D. The customer must upgrade to an ERS 8810 chassis to run software release 7.x.

Correct Answer: C

QUESTION 3

A customer needs to install a new Ethernet Routing Switch (ERS) 2550T on the 172.16.5.0/24 network, but does not have a console cable available. Which statement is correct?


- A. The switch will first attempt to use BootP to acquire an IP address, and if that fails it will assign IP address 192.160.1.1/24 to the switch IP.
- B. The customer can set the switch to use the temporary address of 192.168.192.168 by pressing the User Interface button on the front of the ERS 2550T
- C. To communicate with an ERS 2550T the IP address must first be set though the console interface.
- D. The customer can connect to the network management Ethernet port which is pre-configured to use the 192.168.1.1/24 IP address

Correct Answer: D



QUESTION 4

Refer to the exhibit.

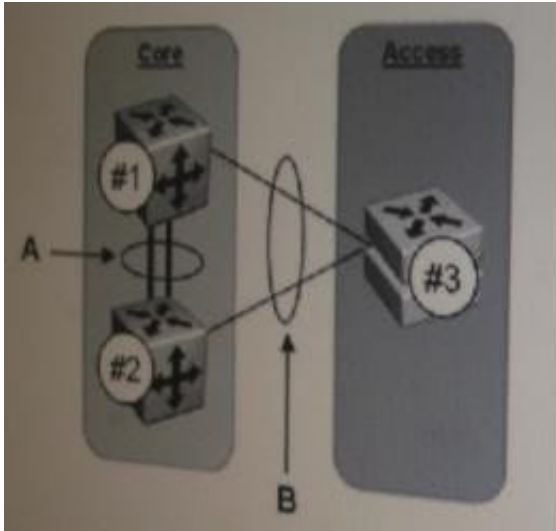

Virtual Link Aggregation Control Protocol (VLCAP) is configured by port, and traffic is only forwarded across the uplinks when VLCAP is up and running correctly.

A = InterSwitch Trunk (IST)

B = SplitMulti-Link Trunk (SMLT)

#1 ERS 8600

#2 ERS 8600

#3 ERS 4500

When configuring VLCAP for the network shown in the exhibit, where should it be configured?

- A. On all IST ports and not SMLT ports.
- B. On all SMLT links and one of the IST links.
- C. On all IST and all SMLT ports.
- D. On none of the IST or SMLT links depicted in this network.

Correct Answer: C

QUESTION 5

Which group of commands will configure Ethernet Routing Switch (ERS) 8600 to deny any source in the multicast group from reaching the multicast receivers connected to ERS 8600-B?

- A. config ip prefix-list "2" add-prefix 10.1.1.0/30config vlan 2 ip igmp access-control 2 create 172.3.1.0 255.255.255.0



deny-tx

B. config ip prefix-list "2" add-prefix 192.4.0-0/12config vlan 2 ip igmp access-control 2 create 172.3.1.0 255.255.255.0
deny-rx

C. config ip prefix-list "2" add-prefix 238.1.1.0/24config vlan 2 ip igmp access-control 2 create 172.3.1.0 255.255.255.0
deny-tx

D. config ip prefix-list "2" add-prefix 238.1.1.0/24config vlan 2 ip igmp access-control 2 create 194.4.10.0 255.255.255.0
deny-tx

Correct Answer: C

[3605 Practice Test](#)

[3605 Study Guide](#)

[3605 Exam Questions](#)