



3V0-42.20^{Q&As}

Advanced Design VMware NSX-T Data Center

Pass VMware 3V0-42.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/3v0-42-20.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by VMware
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

An architect is helping an organization with the Logical Design of an NSX-T Data Center solution.

This information was gathered during the Assessment Phase:

There is a performance based SLA for East – West traffic.

The business critical applications require prioritization of their traffic.

One of the services is a file share and has a high demand for bandwidth.

Which selection should the architect include in their design? (Choose the best answer.)

- A. Review average North/South traffic from the core switches and firewall.
- B. Include a segment QoS profile and review the impact of utilizing this feature.
- C. Meet with the organization's application team to get additional information.
- D. Monitor East-West traffic throughout normal business cycles.

Correct Answer: B

QUESTION 2

What is a design justification for a solution with 3 NSX Manager nodes deployed in a 4 ESXi cluster Management Cluster? (Choose the best answer.)

- A. NSX Controllers are separated from NSX Managers allowing 6 ESXi servers to host them.
- B. NSX Management Plane and Control Plane will be reduced to a single point of failure.
- C. Compute consumption guarantees NSX Manager nodes can be run on the same ESXi host.
- D. Single point of failure on Control Plane and Management Plane will be mitigated.

Correct Answer: B

QUESTION 3

What would an architect recommend to a customer that wants to extend management to an additional data center through Layer 2, but does not want to add additional NSX-T licensing? (Choose the best answer.)

- A. Deploy a standalone NSX Controller.
- B. Deploy a standalone NSX Manager.
- C. Deploy a standalone Edge as the IPsec VPN.



D. Deploy Autonomous Edge as the L2 VPN client.

Correct Answer: D

Reference: https://docs.vmware.com/en/VMware-NSX-T-Data-Center/3.0/nsxt_30_admin.pdf

QUESTION 4

An architect is helping an organization with the Physical Design of an NSX-T Data Center solution.

This information was gathered during a workshop:

Any proposed solution must provide low latency. Any proposed solution must provide high throughput. Customer is running stock trading applications.


Which two selections should the architect recommend to meet high-performance workload requirements? (Choose two.)

- A. Leverage ESXi as the compute host.
- B. Use LACP for all uplink profiles.
- C. Leverage KVM as the compute host.
- D. Enable enhanced data path mode on the N-VDS.
- E. Enable latency sensitivity mode on the N-VDS.

Correct Answer: AD

QUESTION 5

Refer to the exhibit.

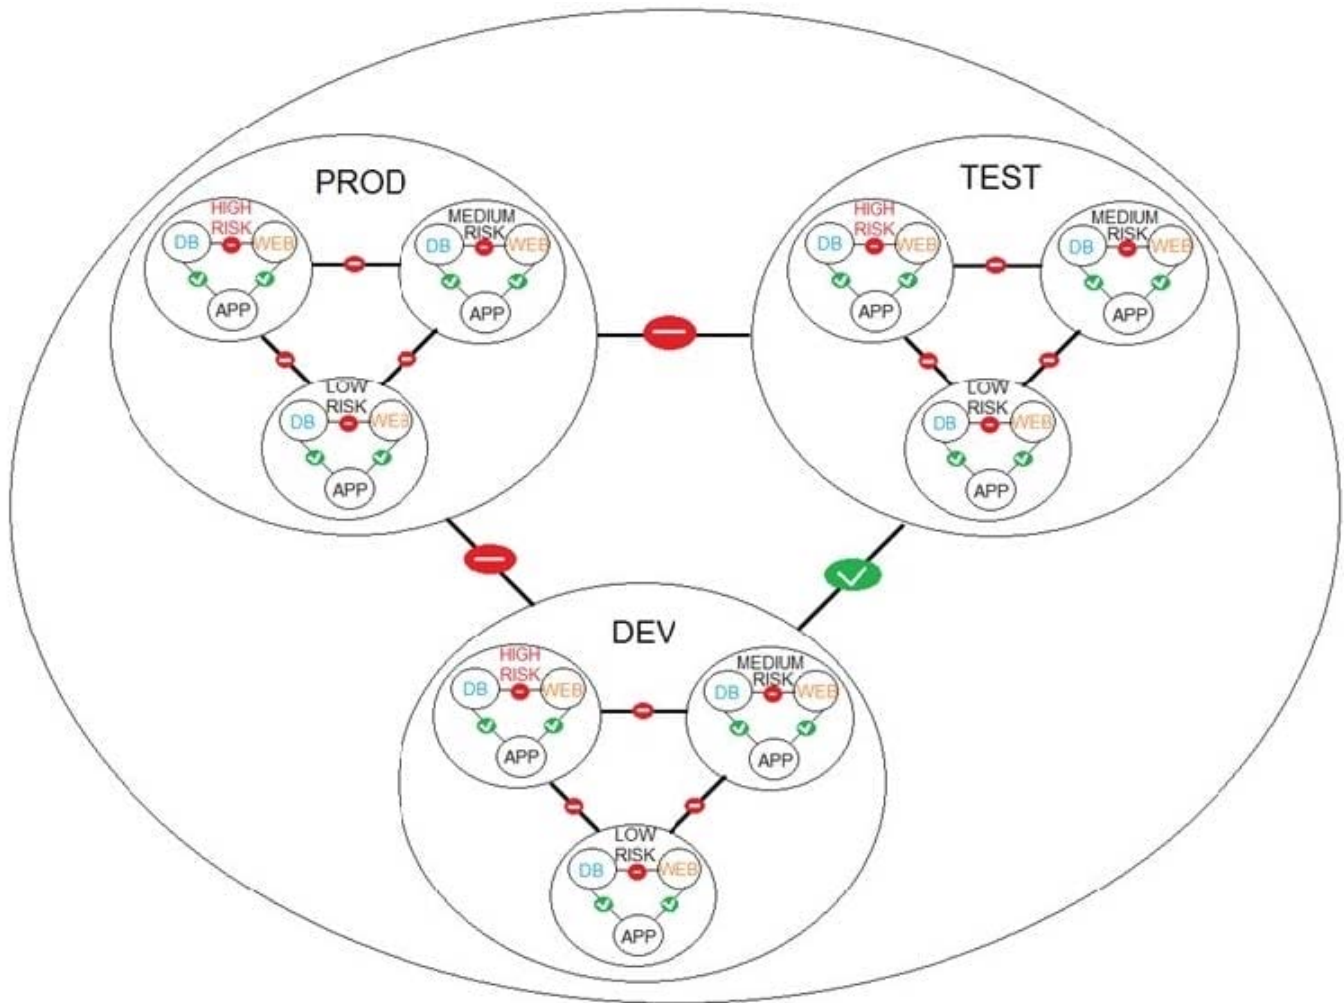

A financial company is adopting micro-services with the intent of simplifying network security. An NSX-T architect is proposing a NSX-T Data Center micro-segmentation logical design. The architect has created a diagram to share with the customer.

How many security levels will be implemented according to this Logical Design? (Choose the best answer.)

- A. 5 levels
- B. 3 levels
- C. 9 levels
- D. 4 levels

Correct Answer: A

[3V0-42.20 PDF Dumps](#)

[3V0-42.20 VCE Dumps](#)

[3V0-42.20 Braindumps](#)