

400-201^{Q&As}

CCIE Service Provider Written

Pass Cisco 400-201 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.geekcert.com/400-201.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.geekcert.com/400-201.html

2021 Latest geekcert 400-201 PDF and VCE dumps Download

QUESTION 1

Which two statements are correct?

- A. A VC type 5 transports a VLAN over MPLS.
- B. A VC type 4 tunnels an Ethernet port over MPLS.
- C. A VC type 5 tunnels an Ethernet port over MPLS.
- D. A VC type 4 transports a VLAN over MPLS.

Correct Answer: CD

VC Type 4 is used for Ethernet VLAN mode. VC Type 5 is used for Ethernet Port mode.

QUESTION 2

Which option is the main task of the BGP I/O?

- A. handles queuing and processing of BGP packets
- B. performs BGP peer establishment
- C. imports and exports routes into a particular VPN routing and forwarding instance
- D. calculates the best BGP path
- E. interacts with the routing information base

Correct Answer: A


QUESTION 3

In the Network Function Virtualization context, drag and drop the network functions and characteristics on the left to the right where they are better performed


Select and Place:


https://www.geekcert.com/400-201.html

2021 Latest geekcert 400-201 PDF and VCE dumps Download

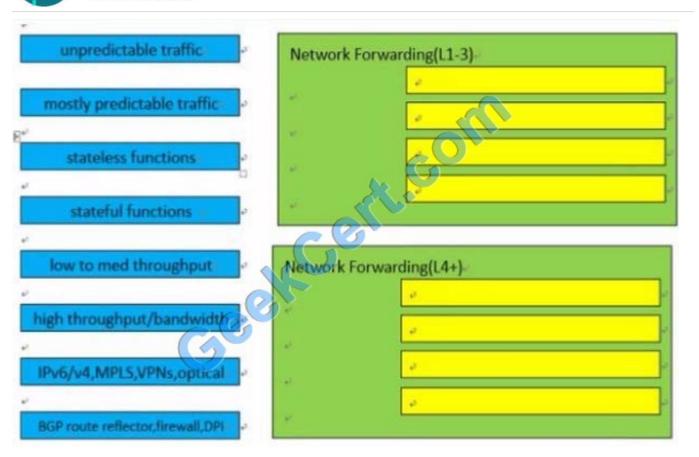

Correct Answer:

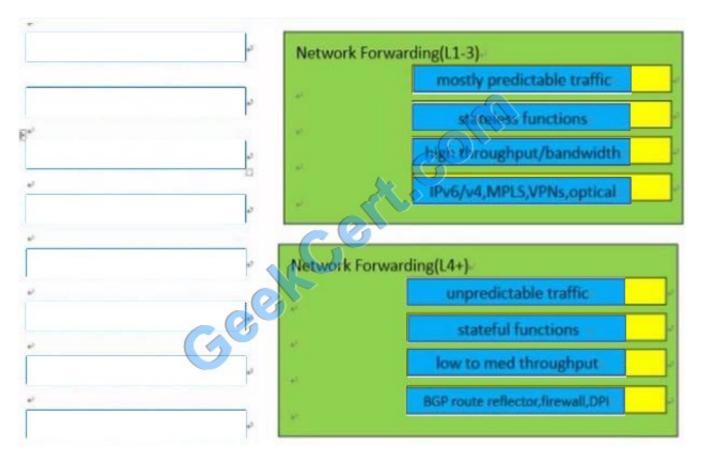

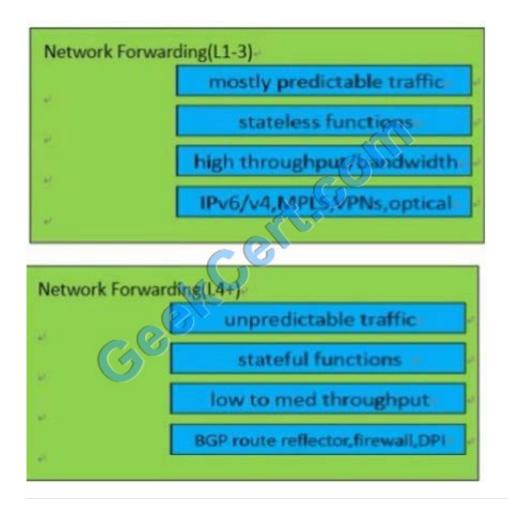

QUESTION 4


Which three BGP features improve convergence? (Choose three.)

- A. route reflector
- B. BGP cost community
- C. BGP autodiscovery
- D. BGP soft reconfiguration
- E. Fast Peering Session Deactivation
- F. eBGP multihop
- G. BGP PIC
- H. next-hop address tracking

Correct Answer: EGH

https://www.geekcert.com/400-201.html

QUESTION 5

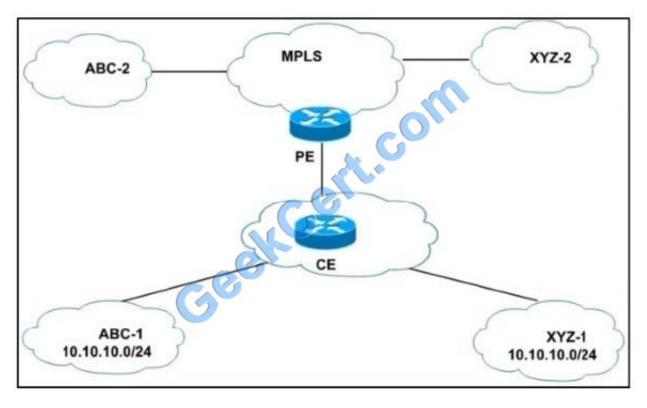

Refer to the exhibit. ABC and XYZ are VPNv4 customers. CE device does not have MPLS enabled. Which action must be taken on CE device to ensure that ABC-1 site communicates with ABC-2 site isolated from the communication between XYZ -1 and XYZ-2?

- A. Create two VRFs using the same RDs values and route targets values as per PE router, one VRF per customer.
- B. Create a single VRF without RD for ABC-1; XYZ-1 still uses the global routing table on CE router.
- C. Create two VRFs using different route targets, one VRF per customer.
- D. Create a single VRF for ABC-1 using the same RDs values and route targets values as per PE router; XYZ-1 still uses the global routing table on CE router.

Correct Answer: C

400-201 VCE Dumps

400-201 Exam Questions

400-201 Braindumps

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.geekcert.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © geekcert, All Rights Reserved.