

400-351^{Q&As}

CCIE Wireless Written

Pass Cisco 400-351 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.geekcert.com/400-351.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



VCE & PDF GeekCert.com

https://www.geekcert.com/400-351.html

2021 Latest geekcert 400-351 PDF and VCE dumps Download

QUESTION 1

You are working on a deployment that uses two Cisco APs as wireless bridges. One of the bridges is configured as a root bridge and the second bridge is configured as a nonroot bridge. Client A associates to the root bridge and client B associates to the nonroot bridge. Which two statements about this scenario are true? (Choose two)

- A. The default setting of a bridge is nonroot bridge.
- B. For two bridges to communicate with each other, one of the bridges must be in root mode and the other bridge must be in nonroot mode.
- C. Only one device can connect to the Ethernet port of a nonroot bridge.
- D. Two bridges that are in root mode can talk to each other.

E. In point-to-multipoint bridging, WGB is not recommended with the root bridge. WGB must be associated to the root AP in point-to-multipoint bridging setup.

Correct Answer: AE

http://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/16041- bridge-faq.html http://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/22950-br-ts- 22950.html#reset http://www.cisco.com/c/en/us/td/docs/wireless/access_point/15-3-3/configuration/guide/cg15-3-3/cg15-3-3-chap6-radio.html

QUESTION 2

Which two statements about 802.11ac wireless LAN technology are true? (Choose two.)

- A. Antenna design does have to change because 802.11ac occupies different spectrum as 802.11a and 802.11n at 5 GHz
- B. The 802.11ac IEEE standard allows for theoretical speeds up to 6.9 Gbps in the 5 GHz band, which is 11,5 times those of 802.11n
- C. The 802.11ac standard defines downlink and uplink MU-MIMO, which is for the access point sending to multiple clients concurrently and for multiple clients coordinating to transmit separate packets to the access point at the same time
- D. The 802.11ac Wave 2 standard limits itself to communicating with a maximum of four clients at a time, using up to a total of eight spatial streams (for all clients) or a maximum of four spatial streams per client in a MU-MIMO transmission
- E. Client MU-MIMO (802.11ac Wave 2) can be achieved easily via software upgrade assuming the client is at least 802.11ac Wave 1 compatible

Correct Answer: BC


QUESTION 3

DRAG DROP

https://www.geekcert.com/400-351.html

2021 Latest geekcert 400-351 PDF and VCE dumps Download

Select and Place:

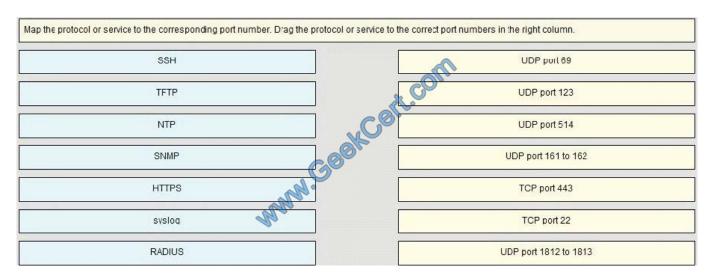

Correct Answer:



QUESTION 4

Given: LAG bundles all distribution ports on a WLC into a single 802.3ad port channel. The system load-balances access points transparently to the user. Question: Which two items should be taken into consideration when configuring the neighbor Ethernet switch? (Choose two.)

A. The Cisco WLC relies on the neighbor switch to load-balance traffic across the EtherChannel. The Cisco WLC does not perform any EtherChannel load-balancing on its own.

- B. LAG requires the Ether Channel to be configured for the "on" mode on the Catalyst switch.
- C. LAG requires that the Catalyst switch be configured with CiscoPAgP. Link Aggregation Control Protocol is not supported.
- D. The load-balancing method configured on the Catalyst switch must be based on Layer 2, not Layer 3. Failure to follow this recommendation may result in problems with access point association.

Correct Answer: AB

https://www.geekcert.com/400-351.html

2021 Latest geekcert 400-351 PDF and VCE dumps Download

QUESTION 5

Which two statements about API authentication used by the mobility services engine are true? (Choose two.)

- A. Each API request must contain the API access credentials in the authorization header.
- B. User credentials without write permissions can perform only GET operations on the REST API resources.
- C. MSE APIs uses OAUTH authentication scheme to authenticate the API request.
- D. If the API request does not have an authorization header or, if the credentials are incorrect, then the MSE sends a HTTP 500 Internal Server Error response code.
- E. The authorization header is constructed with the username and password that are combined into a literal string that is then encoded using hex encoding.

Correct Answer: AB

Latest 400-351 Dumps

400-351 PDF Dumps

400-351 Exam Questions



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.geekcert.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited. All trademarks are the property of their respective owners. Copyright © geekcert, All Rights Reserved.