



# 412-79V10<sup>Q&As</sup>

EC-Council Certified Security Analyst (ECSA) V10

**Pass EC-COUNCIL 412-79V10 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/412-79v10.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EC-COUNCIL Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1


Which of the following defines the details of services to be provided for the client's organization and the list of services required for performing the test in the organization?

- A. Draft
- B. Report
- C. Requirement list
- D. Quotation

Correct Answer: D

### QUESTION 2

Vulnerability assessment is an examination of the ability of a system or application, including the current security procedures and controls, to withstand assault.

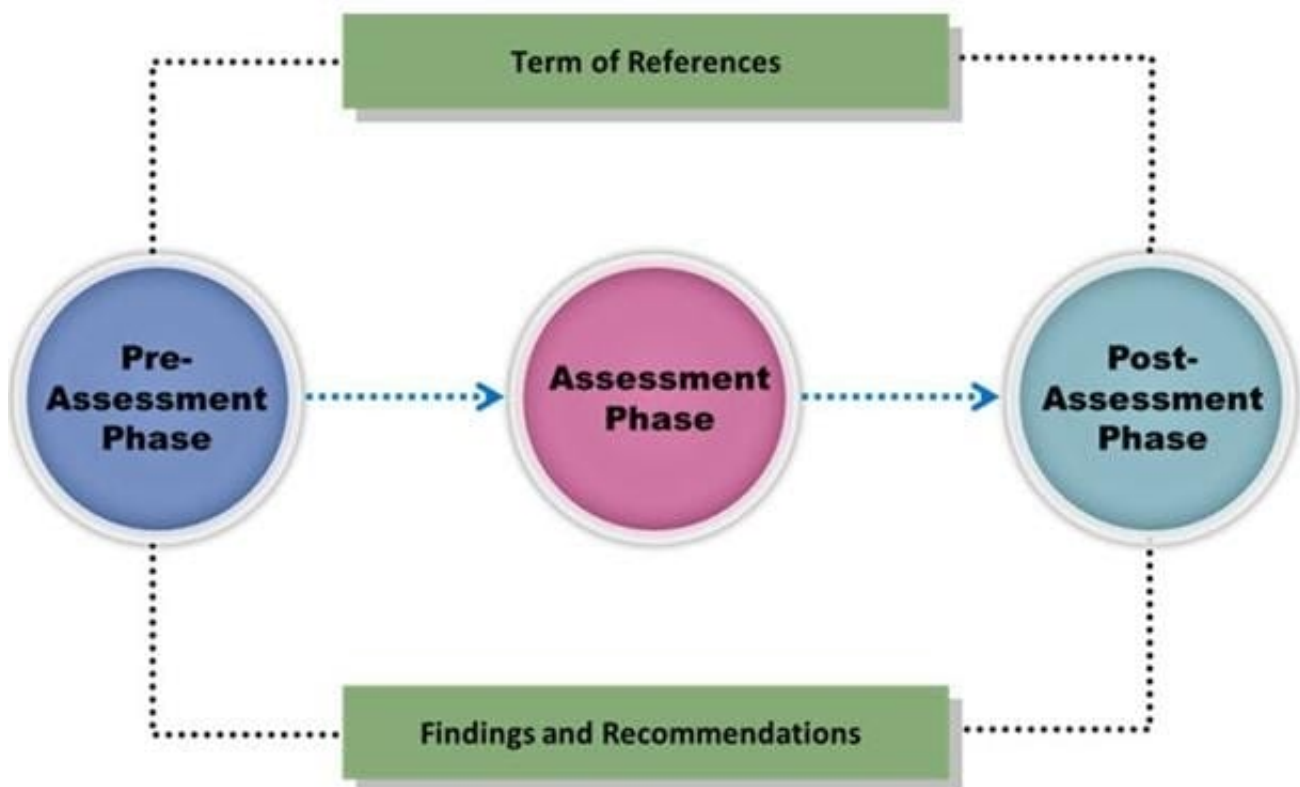

What does a vulnerability assessment identify?

- A. Disgruntled employees
- B. Weaknesses that could be exploited
- C. Physical security breaches



D. Organizational structure

Correct Answer: B

### QUESTION 3

John, the penetration testing manager in a pen testing firm, needs to prepare a pen testing pricing report for a client.

Which of the following factors does he need to consider while preparing the pen testing pricing report?



- A. Number of employees in the client organization
- B. Complete structure of the organization
- C. Number of client computers to be tested and resources required to perform a pen test
- D. Number of servers available in the client organization

Correct Answer: C

### QUESTION 4

Which of the following has an offset field that specifies the length of the header and data?

- A. IP Header
- B. UDP Header
- C. ICMP Header
- D. TCP Header



Correct Answer: D

### QUESTION 5

Traceroute is a computer network diagnostic tool for displaying the route (path) and measuring transit delays of packets across an Internet Protocol (IP) network. It sends a sequence of three Internet Control Message Protocol (ICMP) echo request packets addressed to a destination host.

The time-to-live (TTL) value, also known as hop limit, is used in determining the intermediate routers being traversed towards the destination.

```
C:\Windows\system32\cmd.exe - tracert www.eccouncil.org
C:\>tracert www.eccouncil.org

Tracing route to www.eccouncil.org [66.111.3.186]
over a maximum of 30 hops:

  0  *         *         *         Request timed out.
  1  *         *         *         Request timed out.
  2  111 ms    27 ms     1 ms     ras.beamtele.net [183.82.14.17]
  3  124 ms    156 ms    128 ms    121.240.252.5.STATIC-Hyderabad.usn1.net.in [121.
240.252.5]
  4  155 ms    193 ms    186 ms    172.29.253.33
  5  300 ms    *         142 ms    172.25.81.134
  6  242 ms    *         *         ix-0-100.tcore1.MLU-Mumbai.as6453.net [180.87.38
.5]
  7  243 ms    *         *         if-9-5.tcore1.WYN-Marseille.as6453.net [80.231.2
17.17]
  8  *         *         *         Request timed out.
  9  369 ms    *         *         if-9-2.tcore2.L78-London.as6453.net [80.231.200.
14]
 10  319 ms    380 ms    *         if-1-2.tcore1.L78-London.as6453.net [80.231.130.
121]
 11  *         337 ms    *         if-17-2.tcore1.LDN-London.as6453.net [80.231.130
.130]
 12  *         *         290 ms    195.219.83.102
 13  284 ms    332 ms    497 ms    v1-3604-ve-228.csw2.London1.Level3.net [4.69.166
```

During routing, each router reduces packets\' TTL value by

- B. 1
- C. 4
- D. 2

Correct Answer: B

Reference: <http://www.packetu.com/2009/10/09/traceroute-through-the-asa/>