

4A0-101^{Q&As}

Alcatel-Lucent Interior Routing Protocols and High Availability

Pass Alcatel-Lucent 4A0-101 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.geekcert.com/4a0-101.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1


When IS-IS is electing a DIS, what is used as the tie breaker on an Alcatel-Lucent 7750 SR, if the priorities are the same?

- A. The system ID
- B. The loopback address
- C. The sequence number of the Hello packet
- D. The device that first initiated communication becomes the DIS
- E. The highest interface MAC address

Correct Answer: E

QUESTION 2

Click on the exhibit.

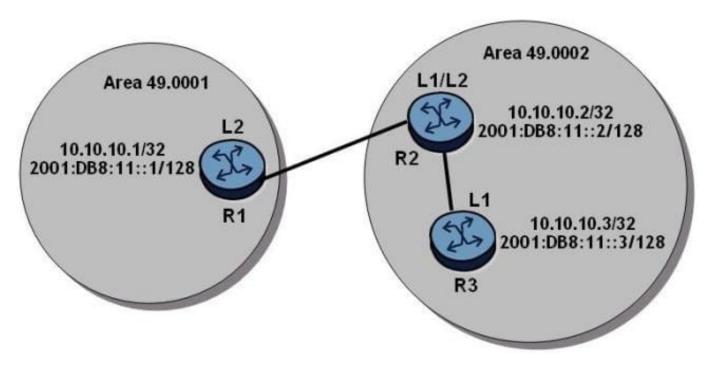

The routers have an established IS-IS L2 adjacency on which IPv4 system addresses are exchanged. An operator successfully configures multi-topology IS-IS routing so that the IPv6 system addresses are also exchanged between routers.

After IPv6 has been configured, which of the following is TRUE?

- A. Router R2 has two IS-IS adjacencies and two LSPs
- B. Router R2 has two IS-IS adjacencies and three LSPs

VCE & PDF GeekCert.com

https://www.geekcert.com/4a0-101.html

2024 Latest geekcert 4A0-101 PDF and VCE dumps Download

- C. Router R2 has two IS-IS adjacencies and four LSPs
- D. Router R2 has three IS-IS adjacencies and three LSPs
- E. Router R2 has three IS-IS adjacencies and four LSPs
- F. Router R2 has three IS-IS adjacencies and six LSPs

Correct Answer: C

QUESTION 3

What is the primary purpose of variable length subnet masks (VLSM)?

- A. To reduce the size of each routing update.
- B. To allow interoperability between routing protocols.
- C. To allow different subnet masks for different subnets.
- D. To reduce the size of the routing table.

Correct Answer: C

QUESTION 4

Which of the following best describes the forwarding of a IPv6 packet that has a destination anycast address?

- A. It is sent to all nodes on the local link.
- B. It is sent to all nodes on the local network.
- C. It is sent to all nodes that have joined the anycast group.
- D. It is sent to the nearest node that is assigned the anycast address
- E. It is sent to all nodes that are assigned the anycast address.

Correct Answer: D

QUESTION 5

What value should the AFI be set to for locally administered addressing?

A. 1

B. 49 C. 83

D. 0

Correct Answer: B



https://www.geekcert.com/4a0-101.html 2024 Latest geekcert 4A0-101 PDF and VCE dumps Download

Latest 4A0-101 Dumps

4A0-101 Practice Test

4A0-101 Braindumps