

# 4A0-103<sup>Q&As</sup>

Alcatel-Lucent Multiprotocol Label Switching

# Pass Alcatel-Lucent 4A0-103 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.geekcert.com/4a0-103.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center


- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





## **QUESTION 1**

Click on the exhibit button below.

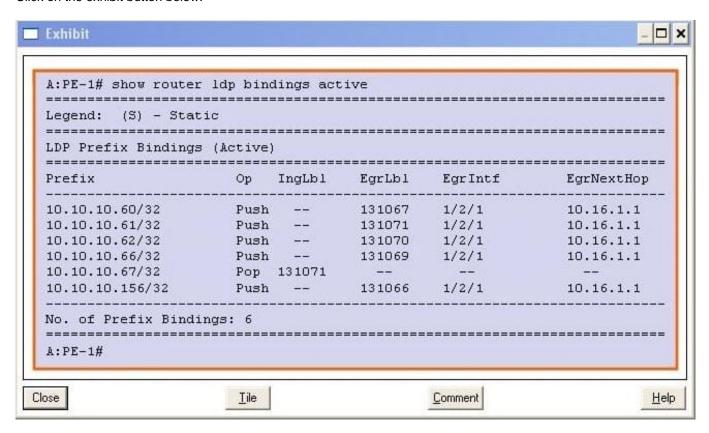

Consider the output shown; what table is displayed?

- A. RIB
- B. FIB
- C. LIB
- D. LFIB

Correct Answer: D

#### **QUESTION 2**

During node protection signaling, the PLR knows the address of the MP from which of the following methods?

- A. The PLR issues a RSVP path message to the destination router to request the address of the MP.
- B. The PLR learns the address of the MP from the ERO.
- C. The PLR learns the address of the MP from the RRO
- D. The PLR learns the address of the MP from the targeted RSVP hello message.

# VCE & PDF GeekCert.com

# https://www.geekcert.com/4a0-103.html

2024 Latest geekcert 4A0-103 PDF and VCE dumps Download

E. The PLR does not need to know the address of the MP.

Correct Answer: C

#### **QUESTION 3**

Which of the following devices assumes the active role during the establishment of an LDP session?

- A. The peer with the higher physical address.
- B. The peer with the higher transport address.
- C. The peer with the lower physical address.
- D. The peer with the lower transport address.
- E. The peer that generated the first Hello message.

Correct Answer: B

## **QUESTION 4**

Which of the following are top level TLV types defined for OSPF-TE? Choose two answers.

- A. Router address
- B. Traffic engineering metric
- C. Maximum bandwidth
- D. Link
- E. Admin Group

Correct Answer: AD

## **QUESTION 5**

An LSP is configured with one-to-one FRR and node protection on a Alcatel-Lucent 7750 SR. Which of the following is FALSE?

- A. Each PLR signals a protection tunnel that avoids the downstream node.
- B. A single protection tunnel can protect all LSPs that go through the same hop.
- C. A link protection tunnel is signaled if a node protection tunnel cannot be established.
- D. Protection tunnels used in this LSP are also detour tunnels.

Correct Answer: B



# https://www.geekcert.com/4a0-103.html 2024 Latest geekcert 4A0-103 PDF and VCE dumps Download

Latest 4A0-103 Dumps

4A0-103 PDF Dumps

4A0-103 Exam Questions