



Alcatel-Lucent Virtual Private Routed Networks

Pass Alcatel-Lucent 4A0-106 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/4a0-106.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

Instant Download After Purchase

- 100% Money Back Guarantee
- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1


Which of the following about the Route Target is TRUE?

- A. The Route Target is added to an IPv4 route to create the VPN-IPv4 route.
- B. The Route Target is an extended community string that identifies VPN membership.
- C. A route can have only one Route Target.
- D. The Route Target is a 64-bit value added to customer prefixes to make them unique.

Correct Answer: B

QUESTION 2

Click the exhibit.

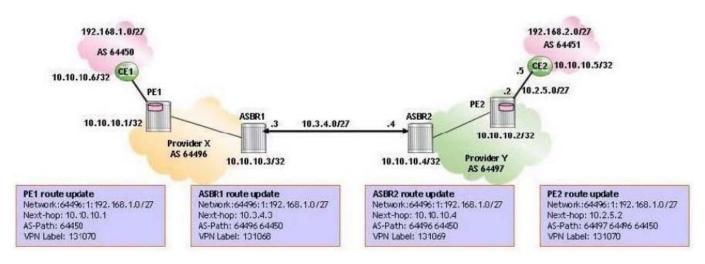

For the Inter-AS model B VPRN, which of the route updates for prefix 192.168.1.0/27 is incorrect?

A. The route update sent from PE1.

- B. The route update sent from PE2.
- C. The route update sent from ASBR1.
- D. The route update sent from ASBR2.

Correct Answer: B

QUESTION 3

In inter-AS model C VPRN, which of the following about the command "advertise-label ipv4" is TRUE?

A. This command is required on all PE routers to distribute labeled IPv4 routes directly to PEs in remote AS.




- B. This command is required on the ASBRs to exchange labeled IPv4 routes between the ASs.
- C. This command is required on the route reflectors to exchange customer routes between ASs as labeled IPv4 routes.
- D. This command is required on all PE routers to distribute labeled IPv4 routes to connected CEs.

Correct Answer: B

QUESTION 4

Click the exhibit.

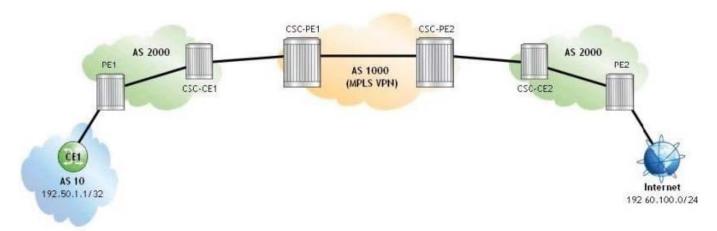

A Carrier Supporting Carrier (CSC) VPRN is configured on an Alcatel-Lucent 7750 SR for a customer carrier who is an Internet Service Provider (ISP). Which of the following configuration steps is NOT required?

A. Configuring iBGP sessions between PEs residing in different customer carrier sites,

- B. Configuring a policy on each CSC-CE to advertise local PE addresses to the network provider.
- C. Configuring a CSC VPRN on each CSC-PE with a SAP interface towards the attached CSC-CE.
- D. Configuring an IES service on PE1.

Correct Answer: C

QUESTION 5

- In a Carrier Supporting Carrier (CSC) VPRN, which of the following is a benefit to the customer carrier?
- A. The ability to offer Internet connectivity and a variety of services over a single CSC VPRN interface.
- B. The ability to maintain its own backbone.
- C. The ability to learn system addresses of network provider PEs.
- D. There is no need to manage end-customer services.

Correct Answer: A



4A0-106 VCE Dumps

4A0-106 Exam Questions

4A0-106 Braindumps