

4A0-M02^{Q&As}

Alcatel-Lucent Mobile Gateways for the LTE Evolved Packet Core

Pass Alcatel-Lucent 4A0-M02 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/4a0-m02.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

Instant Download After Purchase

- 100% Money Back Guarantee
- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

Which of the following messages are exchanged between the PGW and the PCRF during the UE attachment procedure?

- A. Authorization Control Request/ Authorization Control Answer
- B. Credit Control Request / Credit Control Answer
- C. Create Session Request/ Create Session Answer
- D. Attach Request/Attach Answer

Correct Answer: B

QUESTION 2

Which of the following are Diameter-based interfaces?


- A. The RF and the S10 interfaces.
- B. The RF and the Gx interfaces.
- C. The Rx and the S4 interfaces.
- D. The Rx and the SGi interfaces.
- E. The S9 and the S11 interfaces.

Correct Answer: B

QUESTION 3

Based on the information shown in the exhibit, what type of handover is performed when the UE moves from eNodeB2 to eNodeB4?



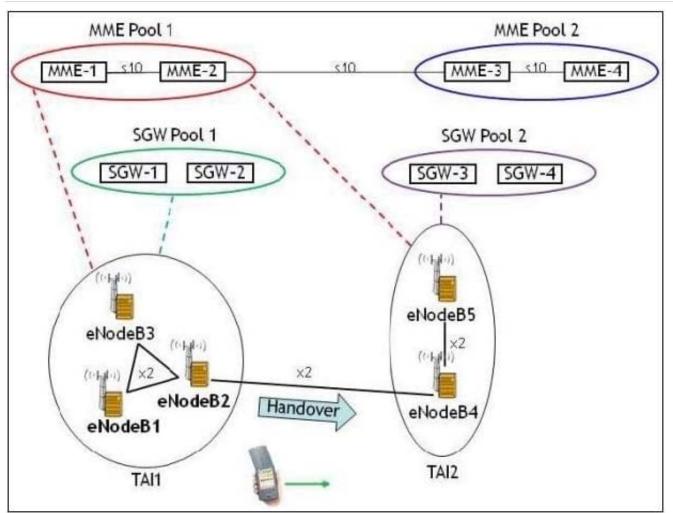

- A. X2-based handover without SGW relocation
- B. X2-based handover with SGW relocation
- C. X2-based handover with MME relocation
- D. S1-based handover with SGW relocation
- E. S1-based handover with MME relocation

Correct Answer: B

QUESTION 4

After a UE attachment procedure, which GTP-U tunnels are established for the UE?

- A. S1-MME GTP-U tunnel and S5 GTP-U tunnel.
- B. S1-U GTP-U tunnel and S5 GTP-U tunnel.
- C. S1-U GTP-U tunnel. S5 GTP-U tunnel, and Gx GTP-U tunnel.



- D. S1-U GTP-U tunnel and Gx GTP-U tunnel.
- E. No GTP-U tunnels are established.

Correct Answer: B

QUESTION 5

Which of the following does not apply when an MG-ISM group is configured on an Alcatel-Lucent 7750 MG? (Choose two)

- A. A maximum of two MG-ISM cards may be configured in a group.
- B. The redundancy model must be configured and it is always displayed as one-to-one
- C. The MG-ISM cards configured in the same group must be contiguous.
- D. Only one MG-ISM card in a group may be configured as working,
- E. More than one MG-ISM card in a group may be configured as protect.
- F. The gateway instance must be specified during the group configuration.

Correct Answer: CE

Latest 4A0-M02 Dumps

4A0-M02 VCE Dumps 4A0-M02 Exam Questions