



4A0-C04^{Q&As}

Nokia NRS II Composite Exam: OSPF version

Pass Nokia 4A0-C04 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/4a0-c04.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Nokia
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

A VPLS has a service MTU of 1600. To create an IES spoke termination to the VPLS, what ip-mtu value must be used for the IES?

- A. 1586
- B. 1596
- C. 1600
- D. 1614

Correct Answer: A

QUESTION 2

What are the three databases maintained by a Link State Protocol?

- A. Neighbor, adjacency, route table
- B. Neighbor, topology, forwarding
- C. Topology, routing, forwarding
- D. There are only two databases: adjacency and topology

Correct Answer: B

QUESTION 3

Which of the following devices inspects the MPLS header in the received packet, and exchanges it for a new MPLS header?

- A. iLER
- B. LER
- C. LSR
- D. PE
- E. eLER

Correct Answer: C

QUESTION 4

Which of the following commands can be used to display the number of SPF computations that have been performed on




a router?

- A. show router ospf area
- B. show router ospf neighbor
- C. show router ospf interface
- D. show router ospf status

Correct Answer: A

QUESTION 5

Click on the exhibit.

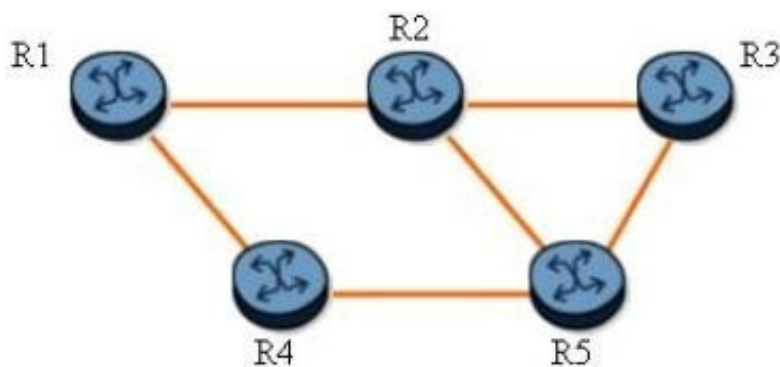

The path of a fast reroute protected LSP is R1-R2-R3. Which of the following about the protected LSP path is TRUE?

- A. All routers along the path, R1, R2, and R3 can be PLRs.
- B. If the R1-R2 link fails, router R4 becomes an MP.
- C. If the R2-R3 link fails, router R3 becomes a PLR.
- D. Router R1 is the LSP head-end and can be a PLR.

Correct Answer: D

[Latest 4A0-C04 Dumps](#)

[4A0-C04 Practice Test](#)

[4A0-C04 Study Guide](#)