642-742^{Q&As}

Implementing Cisco Unified Wireless Voice Networks (IUWVN) v2.0

Pass Cisco 642-742 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/642-742.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Wireless IP phone users are complaining that during the day there are certain points in the facility where voice quality is poor. How should you troubleshoot this issue?

A. Perform a detailed analysis of the voice call quality from end to end.

B. Ask the users to capture voice quality statistics from their wireless IP phones the next time they have issues.

C. Go into the Cisco WLC and monitor client details for WMM issues.

D. Locate the APs in question and use the Cisco WLC to enable TSM to capture WLAN voice traffic statistics.
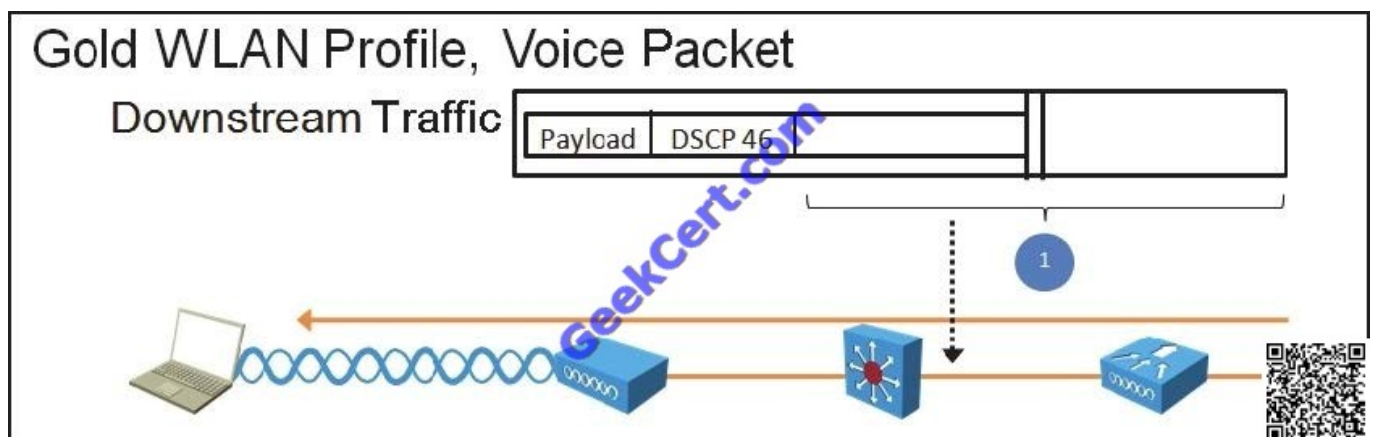
Correct Answer: D

QUESTION 2

Which two configurations can resolve one-way audio in WLANs? (Choose two.)

A. DTPC

B. TPC on AP

C. Platinum QoS in the WLAN

D. admission control

E. maximum transmit power

Correct Answer: AB

QUESTION 3

Refer to the exhibit.

Voice bearer traffic is being sent downstream using a WLAN configured for gold QoS. Which two of these options

indicate the inner 802.11e QoS markings and QoS CAPWAP markings that are used at location 1? (Choose two.)

A. Inner 802.11e: UP 6

B. Outer CAPWAP: DSCP EF and CoS 5

C. Outer CAPWAP: DSCP 46 and CoS 4

D. Inner 802.11e: UP 3

E. Outer CAPWAP: DSCP AF31 and CoS 3

F. Outer CAPWAP: DSCP AF41 and CoS 4 G. Outer CAPWAP: CoS 5

H. Inner 802.11e: UP 5

Correct Answer: CH

QUESTION 4

A network engineer is having wireless multicast fail when it hits the wired network. What command will show the source of multicast groups for troubleshooting?

A. show ip igmp

B. show ip mroute

C. show ip mcache

D. show ip interface counts

E. show ip route

Correct Answer: B

QUESTION 5

When calculating bandwidth usage for an application, what two values represent the minimum and maximum 802.11 overhead per frame? (Choose two.)

A. 16 bytes

B. 24 bytes

C. 28 bytes

D. 48 bytes

E. 56 bytes

F. 60 bytes

G. 64 bytes

Correct Answer: CF

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.geekcert.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: