



75940X^{Q&As}

Avaya Converged Platform Integration

Pass Avaya 75940X Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/75940x.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Avaya
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibit.

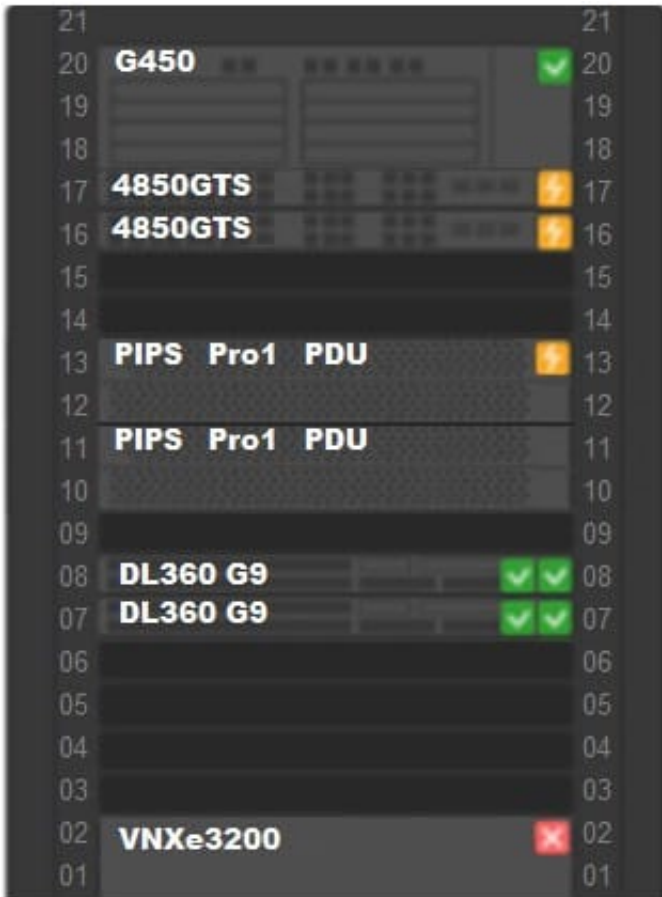

An administrator navigates to the Avaya Orchestrator page shown in the exhibit. The DL360 G9 servers display two Green status icon.

What does this indicate?

- A. There are two Power Supplies associated with each server and both are responsive.
- B. There are two IP addresses associated with each server and both are responsive.
- C. The servers are paired together for redundancy purposes.
- D. The servers are very healthy.

Correct Answer: D

Reference: <https://downloads.avaya.com/css/P8/documents/101061680> (140)

QUESTION 2



What is a benefit of using Virtual Router Redundancy Protocol (VRRP) on the VSP switches in the ACP 4200?

- A. It creates virtual Layer 2 connections for the VMs.
- B. It allows you to connect to the switches for management access.
- C. It ensures the end systems do not need to change their gateway IP address in the event of a fail-over.
- D. It allows the end systems to automatically change their gateway IP address in the event of a fail-over.

Correct Answer: D

Reference: <https://www.alliedtelesis.com/en/documents/vrrp-feature-overview-and-configuration-guide>

QUESTION 3

Refer to the exhibit.

Name	Type	Enabled	Conflicts	Defined...
SMRule	Separate Virtual Machines	Yes	0	User
MSCRule	Run VMs on Hosts	Yes	0	User
CMRule	Separate Virtual Machines	Yes	0	User

Rule Members	Conflicts
SC-Avaya Aura Session Ma...	0
SC-Avaya Aura Session Ma...	0

What is the purpose of the "SMRule" DRS rule that states the two Avaya Aura?Session Managers must run off different ESXi hosts?


- A. To improve the latency of DRS load-balancing
- B. To prevent a single ESXi host from being overloaded with SIP traffic
- C. To preserve seamless failover/recovery across primary and secondary Session Managers
- D. To reduce the memory and CPU load on a single ESXi host



Correct Answer: C

QUESTION 4

Refer to the exhibit.

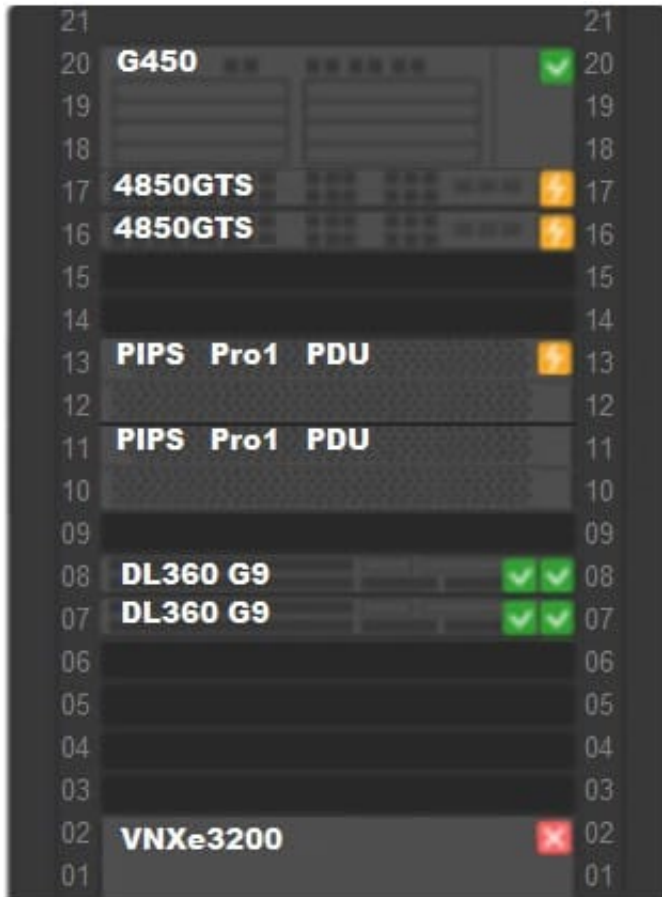

An administrator navigates to the Avaya Orchestrator page shown in the exhibit. The 4850GTS switches and the PIPS Pro1 PDUs are displaying an Orange status icon.

What does this indicate?

- A. These devices have not been configured with correct credentials.
- B. These devices have power supply issues.
- C. These devices have services with status of warning.
- D. These devices have reachability issues.

Correct Answer: C

Reference: <https://downloads.avaya.com/css/P8/documents/101061680> (140)



QUESTION 5

Refer to the exhibit.

AVAYA Orchestrator [Home](#) [Dashboards](#) [Reports](#) [ACP Configuration Wizard](#) [Help](#) [Admin](#)

Configuration Wizard: Avaya Converged Platform configuration - Step 2

ACP "AL_ACP", rack "AL_ACP_RACK"

< Back Next >

Detect Hardware Linko Import Export

Slot	Device Description	Serial No	IP Address	Protocols
Orientation: Vertical				
V1	<input type="text"/>		<input type="text"/> IP Address <input type="button" value="+"/>	SNMP v2 <input type="button" value="v"/> Port <input type="text"/> Community string <input type="button" value="v"/> <input type="button" value="+"/>
V2	<input type="text"/>		<input type="text"/> IP Address <input type="button" value="+"/>	SNMP v2 <input type="button" value="v"/> Port <input type="text"/> Community string <input type="button" value="v"/> <input type="button" value="+"/>
V3	<input type="text"/>		<input type="text"/> IP Address <input type="button" value="+"/>	SNMP v2 <input type="button" value="v"/> Port <input type="text"/> Community string <input type="button" value="v"/> <input type="button" value="+"/>
V4	<input type="text"/>		<input type="text"/> IP Address <input type="button" value="+"/>	SNMP v2 <input type="button" value="v"/> Port <input type="text"/> Community string <input type="button" value="v"/> <input type="button" value="+"/>
V5	<input type="text"/>		<input type="text"/> IP Address <input type="button" value="+"/>	SNMP v2 <input type="button" value="v"/> Port <input type="text"/> Community string <input type="button" value="v"/> <input type="button" value="+"/>

An administrator is trying to add a new VSP to the ACP 4200 rack. However, when the Configuration Wizard is run and the "Detect Hardware" button is clicked, the VSP cannot be detected.

What is potentially causing this to happen?

- A. The VSP has not been configured with the correct slot in Configuration Wizard.
- B. The VSP has not been configured with the correct Device Description in Configuration Wizard.
- C. The VSP has not been configured with the correct Protocol in Configuration Wizard.
- D. The VSP's device credentials has not been configured correctly in System Manager.

Correct Answer: D

Reference: <https://downloads.avaya.com/css/P8/documents/101061680>

[75940X PDF Dumps](#)

[75940X Exam Questions](#)

[75940X Braindumps](#)