

H12-211^{Q&As}

HCIA-Routing & Switching V2.2

Pass Huawei H12-211 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.geekcert.com/h12-211.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.geekcert.com/h12-211.html

QUESTION 1

Which of the following information must be configured for a DHCPv6 relay agent?

- A. DHCPv6 address pool
- B. DNS server address
- C. IPv6 address of the DHCPv6 server
- D. DHCPv6 DUID

Correct Answer: C

QUESTION 2

Which of the following statements regarding single area OSPF are correct? (Choose three)

- A. An IP address needs to be configured on a loopback interface of each router before configuring an OSPF area.
- B. The value of an area can be from 0.0.0.0 to 255,255,255.255.
- C. A single area can be configured using any supported area number.
- D. All of the links of the network need to be advertised in Area 0.

Correct Answer: BCD

QUESTION 3

Refer to the graphic. An administrator has configured OSPF on the two routers, following which he then implements the command silent-interface s0/0/1 on RTA. What effect will this command have on the network? (Multiple Choice)



- A. The link information advertised by RTB will be maintained in the Link State Database of RTA.
- B. The OSPF neighbor relationship will fail between two routers.
- C. The configuration will not affect the OSPF neighbor relationship between the two routers.
- D. The link information advertised by RTB will no longer be maintained in the Link State Database of RTA.

https://www.geekcert.com/h12-211.html

2024 Latest geekcert H12-211 PDF and VCE dumps Download

Correct Answer: BD

QUESTION 4

What is the UDP port number used by the DHCPv6 server?

A. 546

B. 547


C. 548

D. 549

Correct Answer: B

QUESTION 5

Referring to the following topology and configuration, routers R1 and R2 are connected through a Serial low-speed cable, and the data link layer uses PPP. When R1 and R2 When the Holdtimes are inconsistent, ARP negotiation fails and communication cannot be performed.

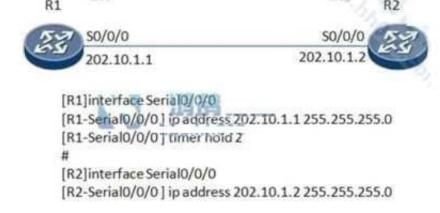

A. Correct

B. Error

Correct Answer: B

H12-211 PDF Dumps

H12-211 Practice Test

H12-211 Study Guide