



H12-211^{Q&As}

HCIA-Routing & Switching V2.2

Pass Huawei H12-211 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/h12-211.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1



To establish multiple PPP point-to-point connections in the Ethernet network, a PPPoE server establishes connections with multiple PPPoE clients on one Ethernet port. How does PPPoE differentiate between each connection?

- A. MAC address.
- B. IP address and MAC address
- C. MAC address and ppp-id
- D. MAC address and session-id

Correct Answer: D

QUESTION 2

Referring to the configuration of the one-arm route in the following figure, it can be judged that even if the ARP proxy is not enabled on the sub-interface of R1, between the administrative department and the finance department Can also visit each other.

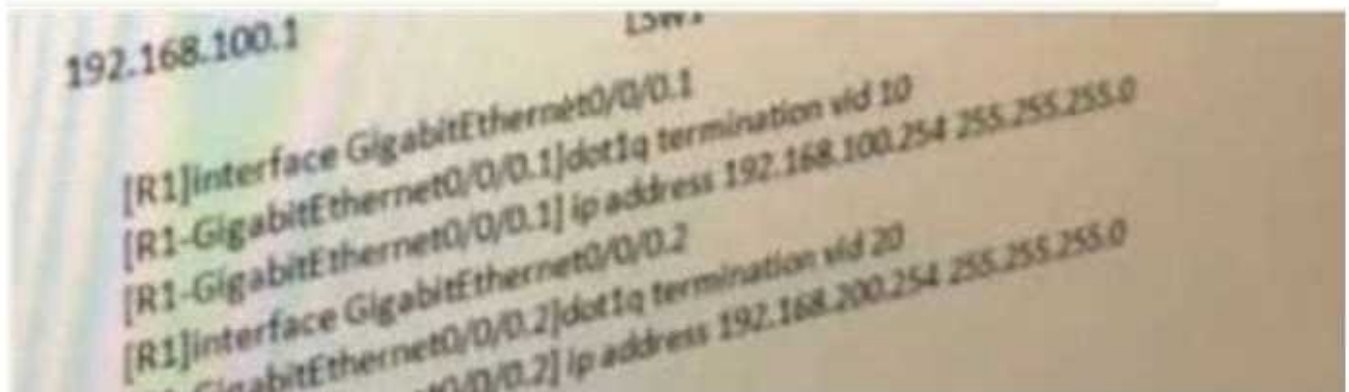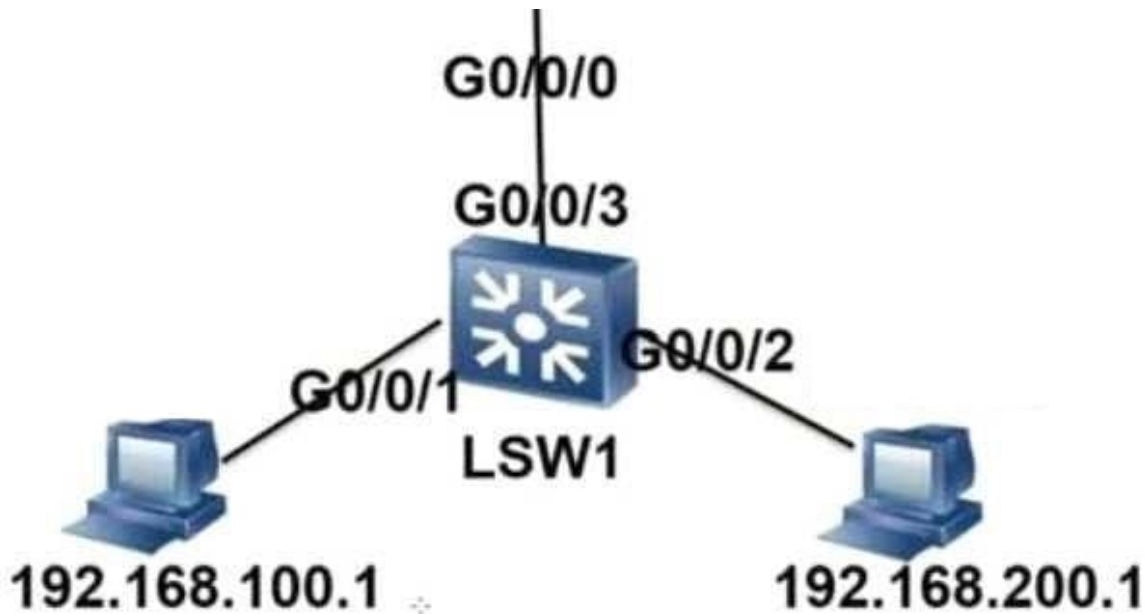

A. Yes

B. Wrong

Correct Answer: B

QUESTION 3

The following shows the command output on a router.

Which of the following statements are true?

display startup MainBoard: Startup system software: flash:/AR2220E-V200R007C00SPC600.cc Next startup system software: flash:/AR2220E-V200R007C00SPC600.cc Backup system software for next startup: null Startup saved-configuration file: flash:/vrpcfg.zip Next startup saved-configuration file: flash:/backup.zip Startup license file: null Next startup license file: null Startup patch package: null Next startup patch package: null Startup voice-files: null Next startup voice-files: null

A. The current VRP version file is the same as the VRP file for next startup.

B. The current VRP version file is different from the VRP file for next startup.



- C. The current configuration file is the same as the configuration file for next startup.
- D. The current configuration file is different from the configuration file for next startup.

Correct Answer: CD

QUESTION 4

What is the total length of the port ID in STP?

- A. 4 bits
- B. 8 bits
- C. 2 bits
- D. 16 bits

Correct Answer: D

QUESTION 5

Which of the following regarding Frame Relay DLCI are correct? (Choose three)

- A. DLCI is locally significant
- B. DLCI is allocated by DTE
- C. The range of DLCI value that can be used is from 16-1007
- D. The same DLCI can be configured on different physical interfaces

Correct Answer: ACD

[Latest H12-211 Dumps](#)

[H12-211 PDF Dumps](#)

[H12-211 Practice Test](#)