



HP2-Z34^{Q&As}

Building HP FlexFabric Data Centers

Pass HP HP2-Z34 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/hp2-z34.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1


An HP Comware Switch 1 supports FCoE for connected servers with Converged Network Adapters (CNAs). On interface Ten 1/0/1 Switch 1 sends FCoE traffic in VSAN 2 to an upstream switch. Switch 2 which also supports FCoE. What is the correct configuration for interface Ten 1/0/71?

- A. FC trunk port, which permits VSAN 2
- B. bound to a VFC interface, which is a trunk port and permits VSAN 2
- C. bound to a VFC interface, which is an access port in VSAN 2
- D. FC access port in VSAN 2

Correct Answer: C

QUESTION 2

Refer to the exhibit

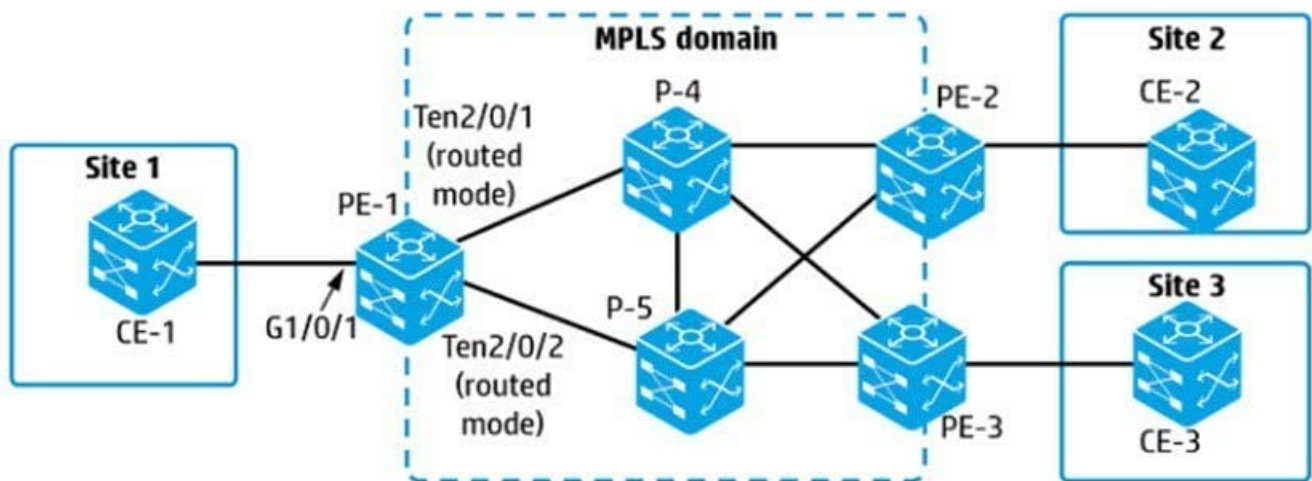

An administrator is configuring an MPLS VPLS Martini solution on PE-1. The VPLS solution should connect customer A sites 1, 2, and 3. Where should the administrator specify the LDP peers and pseudo wire (PW) label for the PWs?

- A. in service instances on interfaces Ten2/0/1 and Ten2/0/2
- B. in a Virtual Switch Instance (VSI) for customer A
- C. in a service instance on interface G1/0/1
- D. in a global cross-connect group

Correct Answer: A



QUESTION 3

A company merger created a situation in which some network segments are using overlapping IP addresses. Administrators want to keep the overlapping addresses and isolate the segments. A core router connects to devices in both segments and routes some traffic for both.

What allows this router to route the traffic without conflict?

- A. VPLS
- B. Provider Backbone Bridging (PBB)
- C. Multi-VPN-Instance CE (MCE)
- D. EVI

Correct Answer: C

QUESTION 4

Refer to the exhibit An HP Comware switch is configured to support FCoE in Fibre Channel Forwarder (FCF) mode. Server1 should be able to discover storage target1 and target2, but not target3. Assume that the zone-aliases have been configured to reference the FC devices correctly

```
zone name 1
  member zone-alias server1
zone name 2
  member zone-alias target1
zone name 3
  member zone-alias target2
zone name 4
  member zone-alias target3
zone name 5
  member zone-alias target1
  member zone-alias target2
zone name 6
  member zone-alias server1
  member zone-alias target1
  member zone-alias target2
```

Which zone(s) should be added to the active zoneset?

- A. zone 1, zone 2, and zone 3
- B. zone 1 and zone 5
- C. zone 4
- D. zone 6

Correct Answer: D



QUESTION 5

Which statement is correct about defining a Route Distinguisher (RD) for a VPN instance on an HP Comware switch?

- A. The RD is only required when the router runs Border Gateway Protocol (BGP) and must match the BGP router ID.
- B. The RD is only required when the router runs Border Gateway Protocol (BGP) and must be unique to that VPN instance.
- C. The RD is always required and must match the switch global router ID.
- D. The RD is always required and must be unique to that VPN instance.

Correct Answer: C

[HP2-Z34 VCE Dumps](#)

[HP2-Z34 Study Guide](#)

[HP2-Z34 Braindumps](#)