



JN0-343^{Q&As}

Juniper Networks Certified Internet Specialist (JNCIS-ENT)

Pass Juniper JN0-343 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-343.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1


You want to configure interface ge-0/0/3 to transition to an inconsistent role in the blocking state when it receives a superior BPDU. Which command would you use?

- A. set interfaces ge-0/0/3.0 no-root-port
- B. set protocols rstp interface ge-0/0/3.0 root-protection
- C. set protocols rstp interface ge-0/0/3.0 no-root-port
- D. set interfaces ge-0/0/3.0 root-protection

Correct Answer: C

QUESTION 2

-- Exhibit ?

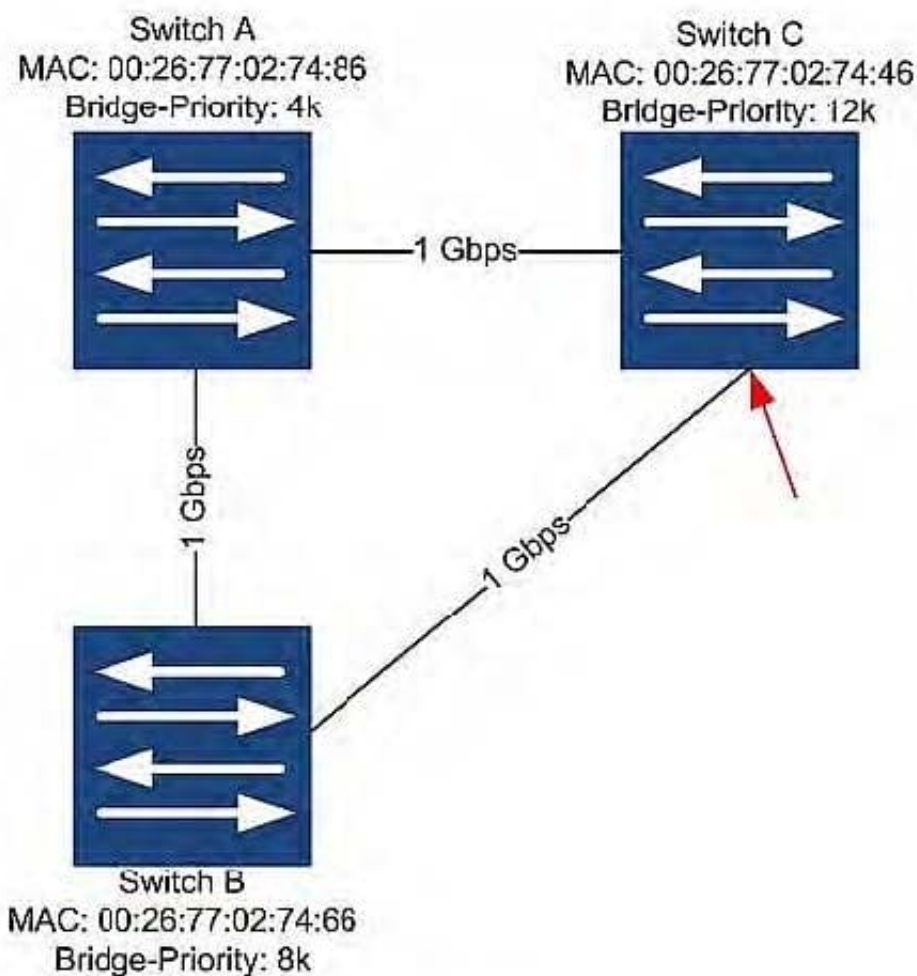

-- Exhibit -



Based on the exhibit and assuming default port costs, in which RSTP port role and state is Switch C's interface connecting to Switch B?

- A. root, forwarding
- B. alternate, discarding
- C. alternate, forwarding
- D. designated, forwarding

Correct Answer: B

QUESTION 3

Which statement describes the role of an OSPF ASBR?

- A. It is used to inject external routes into OSPF.
- B. It is used to export internal routes from OSPF.
- C. It is used to connect a nonbackbone area to Area 0.
- D. It is used to connect a nonbackbone area to Area 1.

Correct Answer: A

QUESTION 4

-- Exhibit -- {master:0} user@switch> show virtual-chassis status Virtual Chassis ID. dd7e.1747.4783 Virtual Chassis ModE. Enabled Mastership Neighbor List Member ID Status Serial No Model priority Role ID Interface 0 (FPC 0) Prsnt BM0208105168 ex4200-24t 255 Master* 1 (FPC 1) NotPrsnt BM0208124231 ex4200-24t Member ID for next new member: 2 (FPC 2) -- Exhibit -- Referring to the output shown in the exhibit, which two statements are true? (Choose two.)

- A. The GbE interfaces associated with the device would use the ge-0/0/x naming format.
- B. The GbE interfaces associated with the device would use the ge-1/0/x naming format.
- C. If a new member is added to this Virtual Chassis, it would assume the Routing Engine role.
- D. If a new member is added to this Virtual Chassis, it would assume the line card role.

Correct Answer: AC

QUESTION 5

Based on the output shown in the exhibit, which statement is correct?



Exhibit

```
{master:0}
user@switch> show spanning-tree interface

Spanning tree interface parameters for instance 0

Interface      Port ID      Designated      Designated
  Port      State  Role      port ID      bridge ID
  Cost
ge-0/0/8.0      128:521      128:521
  8192.50c58daedb41      200  FWD  DESG
ge-0/0/9.0       64:522      64:522
  8192.50c58daedb41      2000  FWD  DESG
ge-0/0/14.0      240:527      240:527
  8192.50c58daedb41      20000  FWD  DESG
ge-0/0/15.0      128:528      128:528
  8192.50c58daedb41      200000  FWD  DESG
```

- A. The ge-0/0/9 interface is using the default priority value.
- B. This switch has a bridge priority of 32k.
- C. This switch has been elected as the root bridge.
- D. The ge-0/0/15 interface is using the default port cost.

Correct Answer: C

[JN0-343 Study Guide](#)

[JN0-343 Exam Questions](#)

[JN0-343 Braindumps](#)