



# JN0-643<sup>Q&As</sup>

Enterprise Routing and Switching, Professional (JNCIP-ENT)

## Pass Juniper JN0-643 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-643.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





## QUESTION 1

-- Exhibit

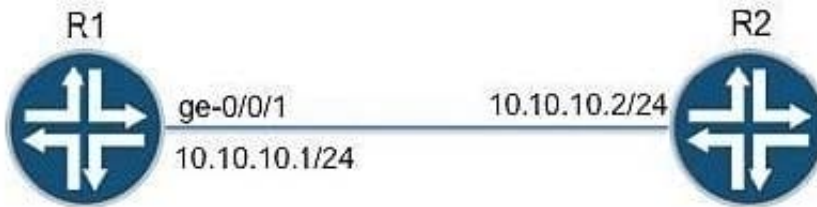

```
[edit protocols pim]
user@R1# show
interface ge-0/0/1.0 {
  mode sparse;
```

-- Exhibit -Click the Exhibit button.

Your company has PIM running on some critical routers in your network, but another engineer has requested that you configure a PIM policy to prevent R2 from becoming a PIM neighbor of R1 by dropping the hello packets.

Referring to the exhibit, which three commands are necessary for preventing R2 from becoming a PIM neighbor of R1? (Choose three.)

- A. set protocols pim interface ge-0/0/1.0 neighbor-policy block-pim
- B. set policy-options policy-statement block-pim term 1 from route-filter 227.2.2.2/32 exact
- C. set policy-options policy-statement block-pim term 1 from route-filter 10.10.10.2/32 exact
- D. set policy-options policy-statement block-pim term 1 then reject
- E. set policy-options policy-statement block-pim term 1 from route-filter 10.10.10.1/32 exact


Correct Answer: ACD

## QUESTION 2

-- Exhibit



### Root Bridge

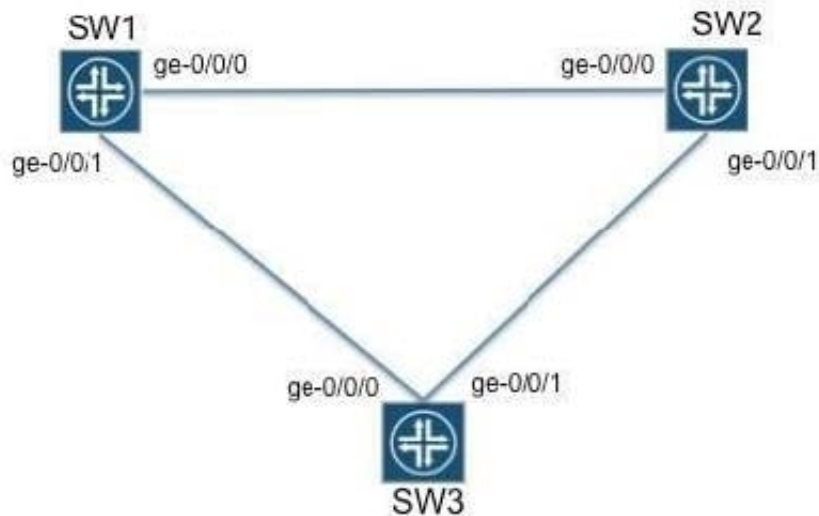

-- Exhibit -

Click the Exhibit button.

Referring to the exhibit, which two statements are true regarding the MSTP port role and port state of ge- 0/0/0 and ge-0/0/1 on SW1?

- A. Port ge-0/0/0 is a root port and ge-0/0/1 is an alternate port.
- B. Both ports are designated ports.
- C. Both ports are in a forwarding state.
- D. Port ge-0/0/0 is a root port and ge-0/0/1 is in a forwarding state.

Correct Answer: BC

### QUESTION 3

Which version of BGP would an enterprise use to peer with an ISP?

- A. Confederation BGP
- B. External BGP
- C. Internal BGP
- D. Labeled-Unicast

Correct Answer: C

### QUESTION 4



You notice that a number of IGMP leave group messages are passing through a BMA network and are impacting the network's performance.

What would you do to resolve this issue without affecting multicast traffic?


- A. Apply an import policy to control leave group messages.
- B. Suppress group-specific queries.
- C. Suppress generic IGMP queries.
- D. Enable promiscuous-mode in IGMP.

Correct Answer: B

---

### QUESTION 5

You have certainly implemented the configuration shown in the exhibit. After committing these changes, the community devices connected to AS-1 are not able to communicate with the appropriate community devices connected to AS-2. What must be done to allow these community devices to communicate?

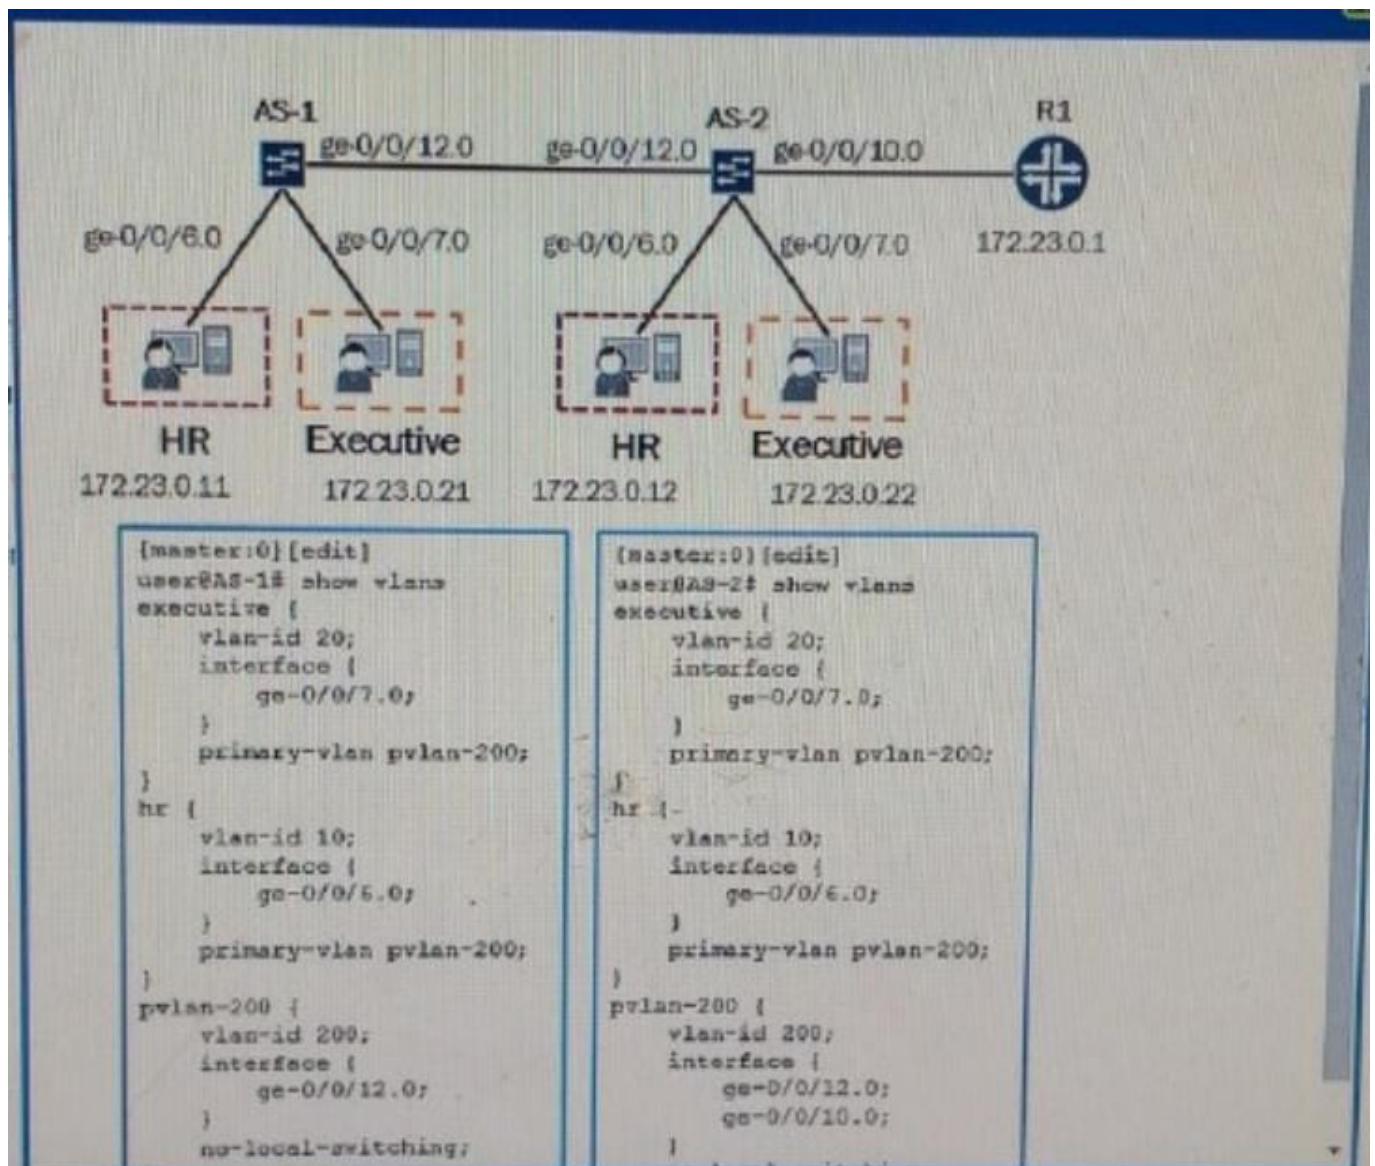

- A. You must configure an isolation VLAN ID Under the pvlan-200 on the AS2 switches
- B. You must configure the ge-0/0/10 interface on AS1 AS THE VPLAN on both switches
- C. You must configure an isolation VLAN ID under the VLAN 200 ON both switches
- D. You must configure the ge-0/0/12 interface on both switches as P VLAN trunks

Correct Answer: D

[JN0-643 PDF Dumps](#)

[JN0-643 VCE Dumps](#)

[JN0-643 Practice Test](#)