

JN0-643^{Q&As}

Enterprise Routing and Switching, Professional (JNCIP-ENT)

Pass Juniper JN0-643 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.geekcert.com/jn0-643.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Juniper Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

You are a service provider and have multiple customers in a building. You are installing a new switch that can host all of your customers. However, you would like to ensure that one customer cannot see or broadcast to another customer. You

would also like to have them use a common gateway IP address from the building.

What of following should be used to provide this access?

A. Layer 2 tunneling


B. VLAN

- C. filter-based VLAN
- D. private VLAN

Correct Answer: D

QUESTION 2

-- Exhibit

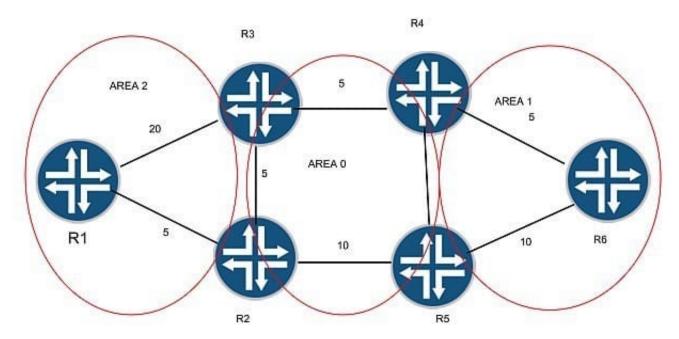

-- Exhibit -Click the Exhibit button.

Referring to the exhibit, R2 is sending a route to R1 with a community value.

Which statement is correct?



- A. Routes will be accepted without change in the attributes.
- B. All routes will be rejected.
- C. Routes will be accepted with the community value removed.
- D. Routes will be rejected with the community value removed.

Correct Answer: C

QUESTION 3

You are asked to establish a single EBGP peering across two physical interfaces to your ISP. Which BGP feature should you use?

A. multipath

B. multihop

- C. accept-remote-nexthop
- D. allow

Correct Answer: B

QUESTION 4

Which statement is true about using an OSPF import policy?

- A. Import policies are not allowed in OSPF, applying the policy will do nothing.
- B. Applying an import policy to OSPF may block normal LSA flooding.
- C. Import policies are allowed only for external route types.
- D. Applying this policy will cause a commit failure.

Correct Answer: C

QUESTION 5

You are asked to set up 802.1X port authentication for all access ports on your EX Series switch. You must ensure that only one user is allowed to authenticate per port and all other attempts are denied.

Which supplicant mode must be used?

- A. single mode
- B. single-secure mode
- C. default mode



D. multiple mode

Correct Answer: B

JN0-643 VCE Dumps

JN0-643 Practice Test

JN0-643 Exam Questions