



JN0-694^{Q&As}

Enterprise Routing and Switching Support, Professional (JNCSP-ENT)

Pass Juniper JN0-694 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-694.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Your Junos device is dropping certain traffic flows, while allowing other traffic flows to pass through the device unaffected.

Which CoS component is causing this problem?

- A. BA classification
- B. RED
- C. MF classification
- D. Rewrite rules

Correct Answer: D

QUESTION 2

Referring to the exhibit, an administrator is trying to advertise a direct route to its neighbor. The route is not advertised. What is causing this behavior?

```
user@router> show route protocol direct table inet.0
...
204.56.78.0/24  *[Direct/0] 1w0d 15:58:07
                > via ge-0/0/1.0

user@router> show configuration policy-options policy-statement advertiseall
term 1 {
  from {
    route-filter 204.56.78.0/24 longer;
  }
  then accept;
}

user@router> show route advertising-protocol bgp 204.56.78.3

user@router>
```


- A. The policy needs the orlonger match.
- B. The policy needs to match on protocol direct
- C. The policy needs to have the accept action inside the term.
- D. The policy needs to add a seed metric into BGP.

Correct Answer: A



QUESTION 3

-- Exhibit

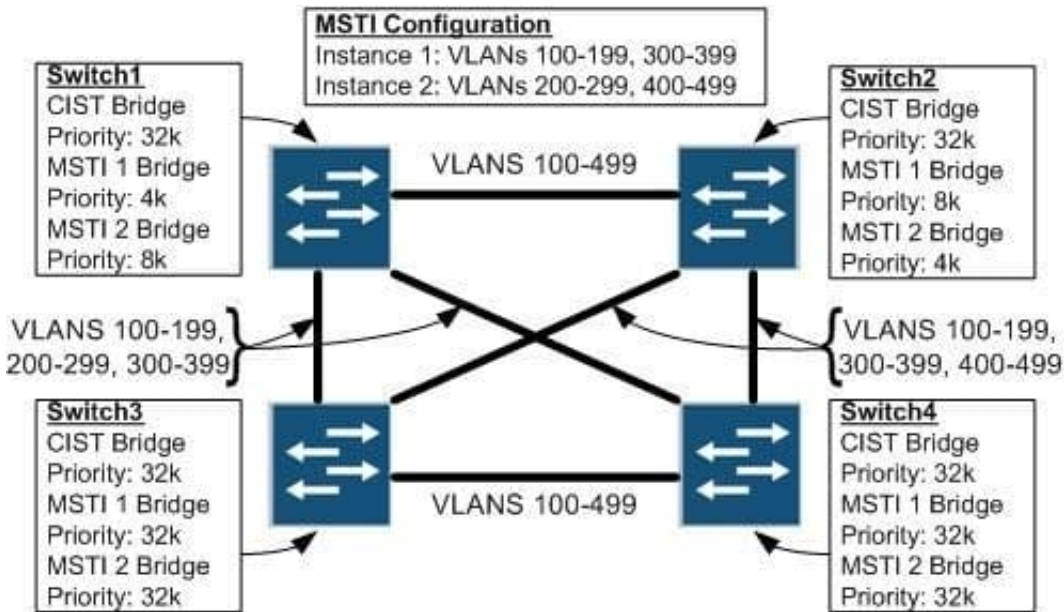

-- Exhibit -Click the Exhibit button.

The exhibit shows a small switched network, some details about the MSTP configuration in the network, and the VLANs that are trunked over each link. When Switch2 reboots, users in VLAN 400 on Switch3 report that they lose connectivity to resources in VLAN 400 on Switch4.

What is the cause of this problem?

- A. There are mismatched bridge priorities.
- B. There is a mismatched MSTP configuration name.
- C. VLAN 400 is not trunked between Switch1 and Switch3.
- D. VLAN 400 is trunked between Switch3 and Switch4.

Correct Answer: C

QUESTION 4

Interface ge-0/0/12 on Switch1 is connected to ge-0/0/12 on Switch2. You have configured both Switch1 and Switch2 to run MSTP. You see the CLI output shown in the exhibit.

What would cause this output?

- A. Switch1 and Switch2 are configured with different autonomous systems.
- B. Switch1 and Switch2 are configured with different bridge priorities.




- C. Switch1 and Switch2 are configured with different names for their VLANs.
- D. Switch1 and Switch2 are configured with different revision levels.

Correct Answer: D

QUESTION 5

-- Exhibit

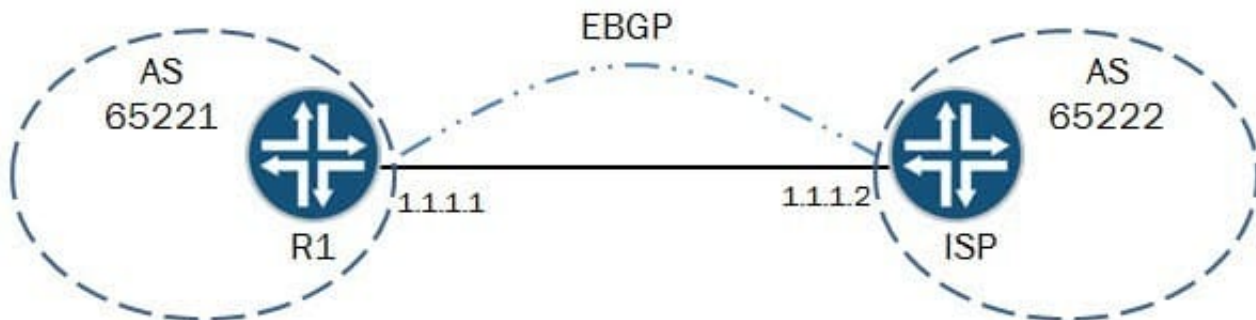

```
[edit]
user@R1# show protocols bgp
group ebgp {
  type external;
  multihop;
  local-address 1.1.1.1;
  peer-as 65222;
  neighbor 172.16.1.2;
}

[edit]
user@R1# show routing-options
static {
  route 172.16.1.2/32 next-hop 1.1.1.1;
}
router-id 10.222.1.1;
autonomous-system 65221;
```

Loopback IP:
172.16.1.2

-- Exhibit -

Click the Exhibit button.

You are asked to configure a multihop EBGP peering to a loopback address of your ISP. The peering does not establish, and the ISP has verified that the settings are correct on their side.

Referring to the exhibit, what is causing the problem?

- A. The peer-as parameter is misconfigured.
- B. The local-address parameter is misconfigured.



C. The static route is misconfigured.

D. The neighbor parameter is misconfigured.

Correct Answer: C

[Latest JN0-694 Dumps](#)

[JN0-694 PDF Dumps](#)

[JN0-694 Braindumps](#)