



DES-1221^{Q&As}

Specialist - Implementation Engineer, PowerStore Solutions

Pass EMC DES-1221 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/des-1221.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A PowerStore X system is being implemented using Dell EMC S5248F-ON Ethernet switching as data switches.

What is required when configuring the VLT interconnects on the data switches?

- A. Assign the switch default route for the VLT traffic
- B. Set the VLT connection to the switch default VLAN
- C. On each switch, select the switch management port MAC as the VLT MAC
- D. Configure the VLT MACs with a matching unique made-up address

Correct Answer: C

QUESTION 2

What is the correct power up sequence for a PowerStore?


- A. 1. Base Enclosure Node B, 2. Base Enclosure Node A, 3. Expansion Enclosure
- B. 1. Base Enclosure, 2. Expansion Enclosure
- C. 1. Base Enclosure Node A, 2. Base Enclosure Node B, 3. Expansion Enclosure
- D. 1. Expansion Enclosure, 2. Base Enclosure

Correct Answer: B

Reference: <https://www.dell.com/support/manuals/en-pk/powerstore/pwrstr-pwdwn-reboot/power-on-a-powerstore-t-model-appliance?guid=guid-1a60464d-b2e6-45bf-86a1-d5ab5f716361&lang=en-us>

QUESTION 3

Refer to the Exhibit.

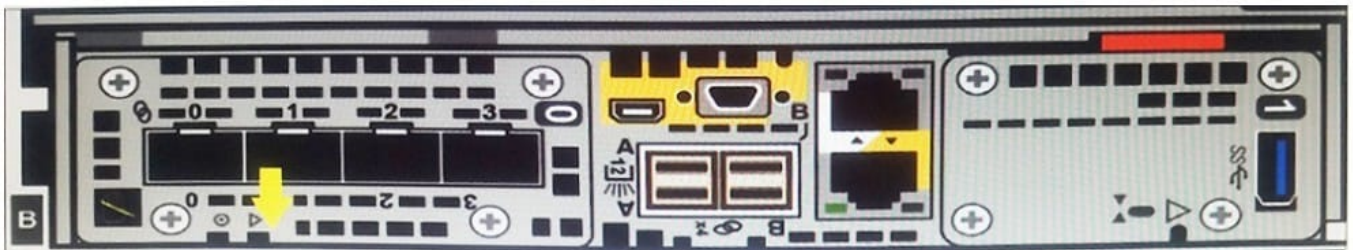

Note the yellow arrow. A Data Center Engineer notices that the LED is blinking blue and amber alternating at one second intervals. What does this indicate?

- A. Node is Degraded



- B. System is booting
- C. Node in Service Mode
- D. System not initialized

Correct Answer: C

Reference: <https://www.dell.com/support/manuals/en-pk/powerstore/pwrstr-isg/embedded-module-leds?guid=guid-bc07892c-75cf-43b6-8f17-8a4c49001aeb&lang=en-us>

QUESTION 4

How is the upgrade process on a multi-appliance cluster run?

- A. Master appliance primary node first, then the peer node
- B. On one node at a time
- C. On all primary nodes first, then peer nodes
- D. In parallel on all nodes

Correct Answer: A

QUESTION 5

DRAG DROP

Match the CLI command to the appropriate configuration.

Select and Place:



Answer Area

Configuration

Ensure the switch has precedence

Configure a switch as a VLT backup

Add VLTi ports to a VLTi domain

Commit and save configuration

Disable L2 Mode on a VLTi interface

Command

```
 #(conf-vlt-1) discovery-interface ethernet 1/1/55-1/1/56
```

```
 #(conf-range-eth1/1/55-1/1/56) no switchport
```

```
 # copy running-configuration startup-configuration
```

```
 #(conf-vlt-1) backup destination 172.17.57.30
```

```
 #(conf-vlt-1) primary-priority 1
```

Correct Answer:

Answer Area

Configuration

Command

Configure a switch as a VLT backup

Commit and save configuration

Ensure the switch has precedence

Disable L2 Mode on a VLTi interface

Add VLTi ports to a VLTi domain

[DES-1221 Practice Test](#)

[DES-1221 Study Guide](#)

[DES-1221 Exam Questions](#)