



DES-4122^{Q&As}

Specialist - Implementation Engineer PowerEdge Version 2.0

Pass EMC DES-4122 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/des-4122.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which processor configuration is used by the Dell EMC PowerEdge R740 server?

- A. 4 socket AMD
- B. 2 socket AMD
- C. 2 socket Intel
- D. 4 socket Intel

Correct Answer: C

QUESTION 2

DRAG DROP

Match each status LED indicator on the Dell EMC 14G PowerEdge server with its corresponding condition.

Select and Place:

Indicator	Condition
Memory	Error related to the RAID array
Temperature	Failed power supply
Drive	System cover is removed
PCIe	Memory error
Electrical	Required drivers for the PCIe card

Correct Answer:




Indicator	Condition
	Drive
	Electrical
	Temperature
	Memory
	PCIe

QUESTION 3

CORRECT TEXT

For security reasons, the Dell EMC PowerEdge server power button must be disabled. Use the System Setup Utility in the simulator to disable the power button. When you have finished using the simulator, click Next.

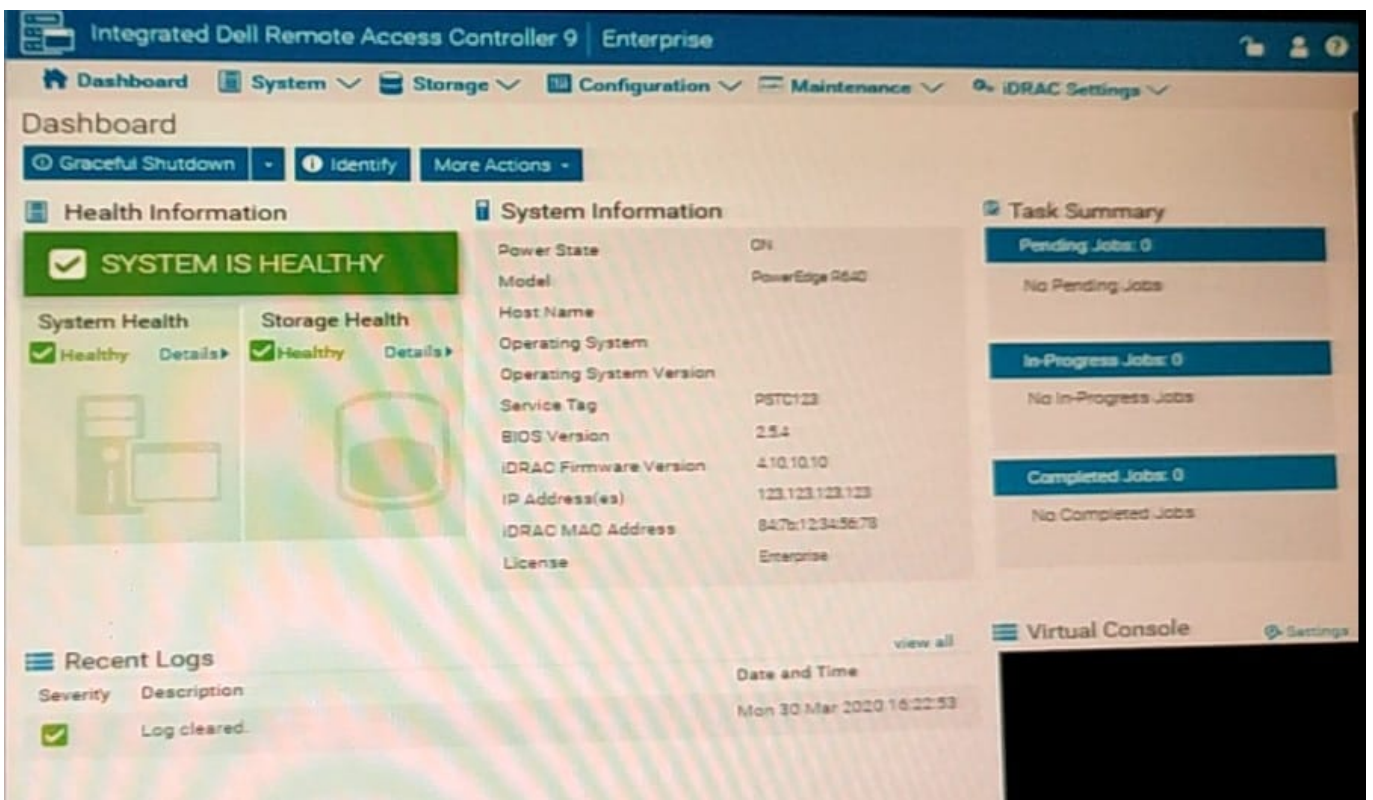

- A. No answer
- B. Place Holder



C. Place Holder

D. Place Holder

Correct Answer: A

QUESTION 4

A technician is creating a virtual disk in the iDRAC (2x 4 TB NL-SAS in RAID 1) to install Windows 2016 They manually boot to the OS installation media without using the Lifecycle Controller OS Deployment wizard Only the first 2048 GB on the virtual disk can be partitioned

How should the technician obtain access to the remaining 2 TB (approximately) of storage?

A. Use the Lifecycle Controller OS Deployment Wizard to deploy the OS on this server

B. Delete the 4 TB virtual disk and create a virtual (boot) disk no larger than 2048 GB

C. Upgrade to a newer version of the operating system

D. Use F2 to go into the BIOS, change the BIOS boot mode to UEFI, and try again

Correct Answer: C

QUESTION 5

Where is the data stored to allow Easy Restore to successfully complete a system board replacement?

A. NAND Flash module on the disk drive mid plane

B. IDSDM SD card

C. vFlash SD card

D. Serial Flash storage in the server's front panel

Correct Answer: C

[DES-4122 PDF Dumps](#)

[DES-4122 Practice Test](#)

[DES-4122 Exam Questions](#)