



DES-4122^{Q&As}

Specialist - Implementation Engineer PowerEdge Version 2.0

Pass EMC DES-4122 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/des-4122.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Which rear disk drive option is available in a Dell EMC PowerEdge R740xd server?

- A. 4x 3.5" drives
- B. 2x3.5" drives
- C. 8x2.5" drives
- D. 6x2.5" drives


Correct Answer: B

QUESTION 2

CORRECT TEXT

For a temporary migration task the CPU core count on the Dell EMC PowerEdge R640 server needs to be reduced to 8 because the installed application will not work due to license restrictions. Use the simulator to apply the change so the application can be installed.

When you have finished using the simulator, click Next.

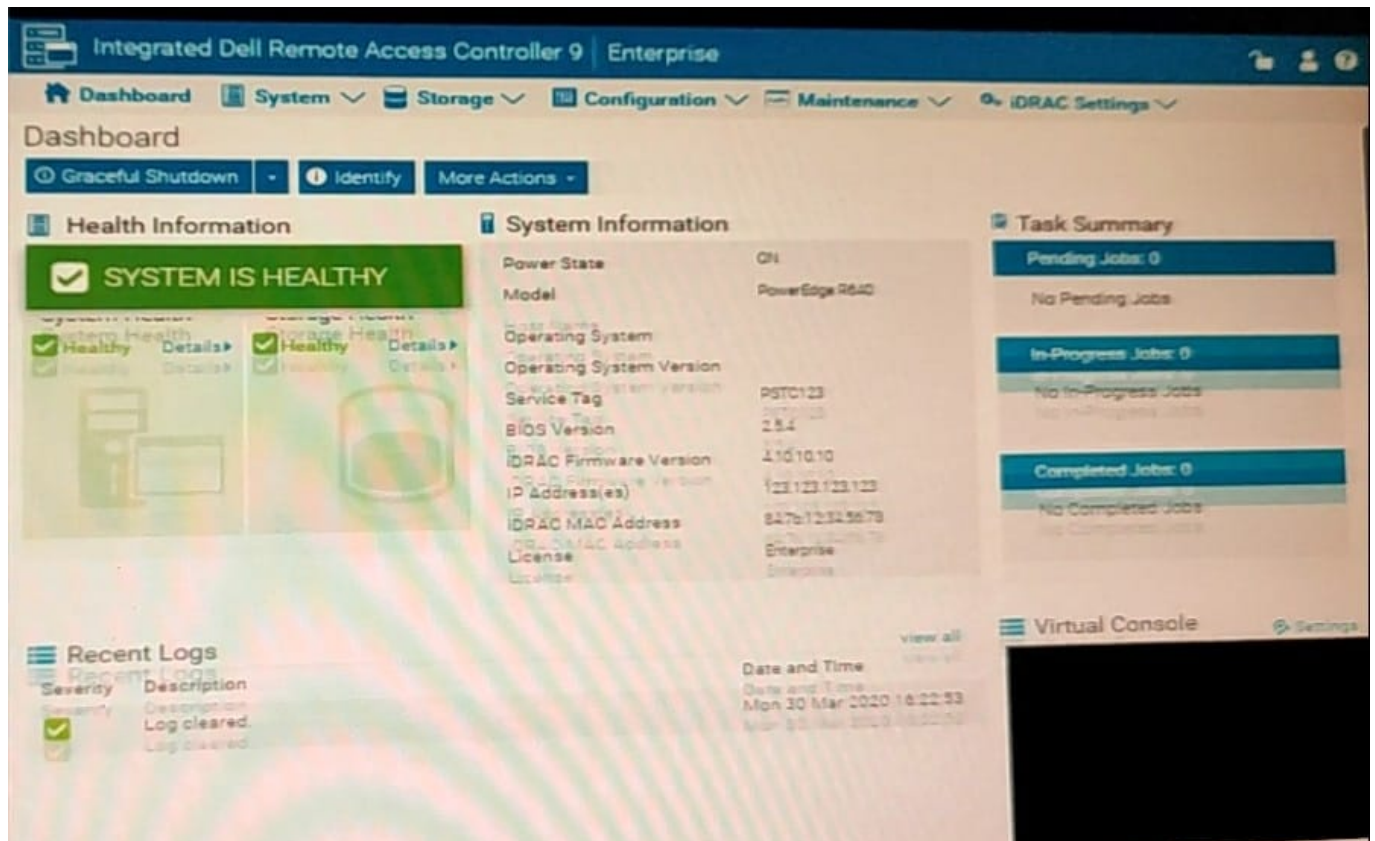



- A. No answer
- B. Place Holder
- C. Place Holder
- D. Place Holder

Correct Answer: A

QUESTION 3

What must be done before upgrading OMSA from the 32-bit to the 64-bit version?

- A. Save the license file
- B. Disable UAC
- C. Back up the configuration
- D. Uninstall the earlier version

Correct Answer: A

QUESTION 4

DRAG DROP

What is the correct order of steps taken during the BIOS/UEFI Recovery process?

Select and Place:

System boots to primary ROM	Step 1
iDRAC extracts the recovery BIOS image from a DUP saved in the control panel from the factory	Step 2
System disables the recovery ROM	Step 3
Connect to CLI of the affected server's iDRAC and run the racadm recover BIOS Setup.1-1 command	Step 4
System initiates the recovery ROM and launches a BIOS update job	Step 5

Correct Answer:



	System boots to primary ROM
	iDRAC extracts the recovery BIOS image from a DUP saved in the control panel from the factory
	Connect to CLI of the affected server's iDRAC and run the racadm recover BIOS Setup 1-1 command
	System disables the recovery ROM
	System initiates the recovery ROM and launches a BIOS update job

QUESTION 5

You must configure a BOSS card with 2 x 120GB drives for a Dell EMC PowerEdge server. What is the only supported mode?

- A. RAID 0
- B. RAID 5
- C. RAID 1
- D. Non-RAID Mirroring

Correct Answer: A

[DES-4122 PDF Dumps](#)

[DES-4122 Practice Test](#)

[DES-4122 Study Guide](#)