



H12-811^{Q&As}

HCIA-Datacom V1.0

Pass Huawei H12-811 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/h12-811.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


What is correct about the SNMP protocol? ()

- A. SNMP protocol uses multicast to send management messages
- B. The SNMP protocol only supports sending management messages on the Ethernet link
- C. SNMP uses ICMP as the network layer protocol
- D. SNMP uses UDP as the transport layer protocol

Correct Answer: D

QUESTION 2

Network as shown in the picture. The administrator hopes that all hosts cannot access the Web service (the port number is 80). Other services can be accessed normally. In the interface configuration of G0/0/1, which ACL rule needs to be bound to trattie-frilter outbound?

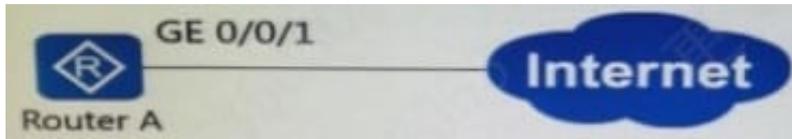

- A. rule 5 permit ip ARule 10 deny top destination-port eq ww#
- B. acl number 3003 Rule 5 permit ip Rule 10 deny udp destination-port eq ww#
- C. acl number 3001 Rule 5 deny udp destination-port eq ww Rule 10 permit ip #
- D. acl number 3000 Rule 5 deny tcp destination-port eq www Rule 10 permit ip #

Correct Answer: D

QUESTION 3

The following is the statement about the election of active ports in link aggregation LACP mode. the correct one is? ()

- A. The interface priority is compared first, and the better one cannot be judged to continue to compare the interface number, the smaller the better.
- B. Only compare interface priority
- C. Compare device priority
- D. Only compare interface numbers



Correct Answer: A

QUESTION 4

The output information of a certain router is shown in the figure. Which of the following statements are correct? ()
(Multiple Choice Questions)

```
RL>display ospf interface verbose

OSPF Process 1 with Router ID 10.0.1.1
Interfaces

Area: 0.0.0.0      (NPLE TE not enabled)

Interface: 10.0.12.1 (GigabitEthernet0/0/0)
Cost: 1          State: BDR      Type: Broadcast    MTU: 1500
Priority: 1
Designated Router: 10.0.12.2
Backup Designated Router: 10.0.12.1
Timers: Hello 10 , Dead 40 , Poll 120 , Retransmit 5 , Transmit Delay 1
ID Statistics
      Type          Input      Output
  Hello             66         65
  DB Description    2          0
  Link-State Req    0          1
  Link-State Update 3          1
  Link-State Ack    2          1
  ALLSPF GROUP
  ALLDR GROUP
  OpenSpid: 0      PrevState: Waiting
  Effective cost: 1, enabled by OSPF Protocol
```

- A. The DR priority of this routing interface is 10
- B. The cost value of this interface is 1
- C. This router is BDR
- D. The Router ID of the router is 10.0.1.1

Correct Answer: BCD

QUESTION 5

After a fault occurs in the network, the administrator finds that the configuration of a certain router has been modified through troubleshooting. What measures should the administrator take to avoid this situation from happening again? (*)

- A. The administrator should configure ACL to control that only the administrator can log in to the device
- B. The administrator should enable port-security on the routed management port
- C. The administrator should configure AAA. to authenticate and authorize users who log in to the device
- D. The administrator should configure the permission level of all accounts except the administrator to log in to the device as

Correct Answer: ACD



VCE & PDF

GeekCert.com

<https://www.geekcert.com/h12-811.html>

2024 Latest geekcert H12-811 PDF and VCE dumps Download

[H12-811 PDF Dumps](#)

[H12-811 Practice Test](#)

[H12-811 Exam Questions](#)