



# HP0-Y51<sup>Q&As</sup>

Building HP SDN and FlexNetwork Solutions

**Pass HP HP0-Y51 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/hp0-y51.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

A company has an HP BYOD solution to let guests connect to a Guest SSID and log in through a registration page. The company needs an Employee SSID which enforces Wi-Fi Protected Access 2 (WPA2) with 802.1X. Employees must authenticate with certificates. Before authenticating with a device for the first time, the employees should be able to connect to the Guest SSID, access the guest registration page, and download valid certificates.

How does the administrator configure User Access Manager (UAM) to allow employees to download certificates from the registration page?

- A. The User Endpoint Settings, create an Endpoint Configuration Distribution Policy that permits the employee groups.
- B. In the Guest Manager settings for the employee manager, enable auto-registration in certificate mode.
- C. In the Guest access policy, make sure that a policy binds the Employee SSID to an access rule with the onboarding VLAN ID.
- D. In the Employee access service, make sure that a policy binds the Employee SSID to an access rule with the onboarding VLAN ID.

Correct Answer: B

### QUESTION 2

Table of Acronyms

EVI	Ethernet Virtual Interconnect
FCoE	Fibre Channel over Ethernet
L2VPN	Layer 2 Virtual Private Network
MDC	Multitenant Device Context
MPLS	Multiprotocol Label Switching
SPBM	Shortest Path Bridging MAC-in-MAC mode
TRILL	Transparent Interconnection of Lots of Links
VPLS	Virtual Private LAN Service
VPN	Virtual Private Network
LDP	Label Distribution Protocol



An administrator has configured an HP Comware switch to support FCoE in Fibre Channel Forwarder (FCF) mode. A switch interface, ten1/0/1, connects to a server FC host bus adapter (HBA). The HBA should send storage traffic in VSAN 2, which is associated with VLAN 20.

How should the administrator assign FC traffic for this HBA to VSAN 2?

- A. By binding a VFC interface to ten1/0/1 and specifying VSAN 2 as the VFC interface trunk VSAN
- B. By accessing the VLAN 20 configuration view and specifying ten1/0/1 as a member port of the VLAN
- C. By configuring ten1/0/1 as an F-mode FC port and specifying VSAN2 as the port access VSAN
- D. By accessing the VSAN 2 configuration view and adding ten1/0/1 as a trunk port


Correct Answer: C

### QUESTION 3

Table of Acronyms

EVI	Ethernet Virtual Interconnect
FCoE	Fibre Channel over Ethernet
L2VPN	Layer 2 Virtual Private Network
MDC	Multitenant Device Context
MPLS	Multiprotocol Label Switching
SPBM	Shortest Path Bridging MAC-in-MAC mode
TRILL	Transparent Interconnection of Lots of Links
VPLS	Virtual Private LAN Service
VPN	Virtual Private Network
LDP	Label Distribution Protocol

Refer to the exhibit.

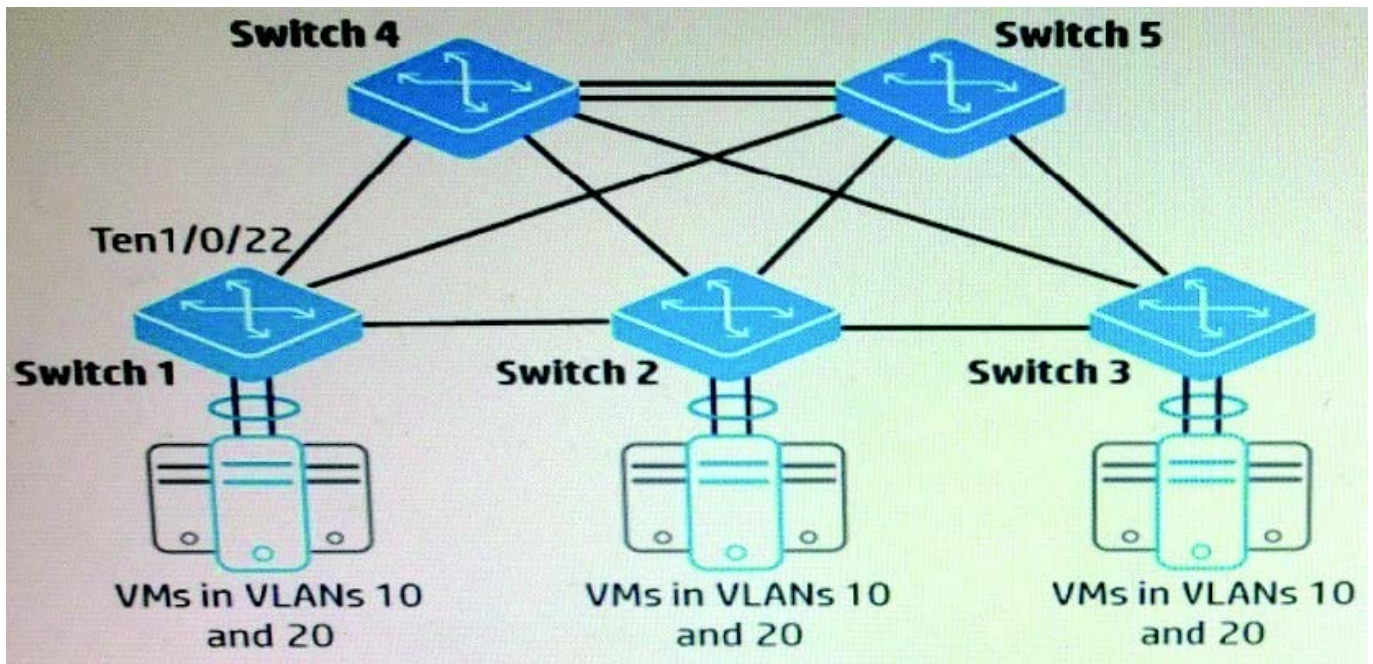

The switch shown in the exhibit should from a TRILL region. For Switch 1 interface ten1/0/22, what is a valid port link-type and TRILL port type?

- A. port link type = access port in any VLAN TRILL port type = TRILL access port
- B. port link type = access port in any VLAN TRILL port type = TRILL trunk port
- C. port link type = trunk port that permits VLMs 10 and 20 TRILL- port type = TRILL access port
- D. port link type = hybrid port with untagged VLANs 10 and 20 TRILL port type = TRILL hybrid port

Correct Answer: C

#### QUESTION 4

A Company has APs that are deployed relatively close together. These APs are controlled by an HP Unified Wired-Wireless controller. Which setting helps to prevent the APs from interfering with each other while also letting the APs extend their coverage area if one of the AP fails?

- A. Channel reuse
- B. Dynamic frequency selection (DFS)
- C. Transmit power control (TPC)
- D. Fair scheduling

Correct Answer: A




QUESTION 5

Table of Acronyms

EVI	Ethernet Virtual Interconnect
FCoE	Fibre Channel over Ethernet
L2VPN	Layer 2 Virtual Private Network
MDC	Multitenant Device Context
MPLS	Multiprotocol Label Switching
SPBM	Shortest Path Bridging MAC-in-MAC mode
TRILL	Transparent Interconnection of Lots of Links
VPLS	Virtual Private LAN Service
VPN	Virtual Private Network
LDP	Label Distribution Protocol

Refer to the exhibit.

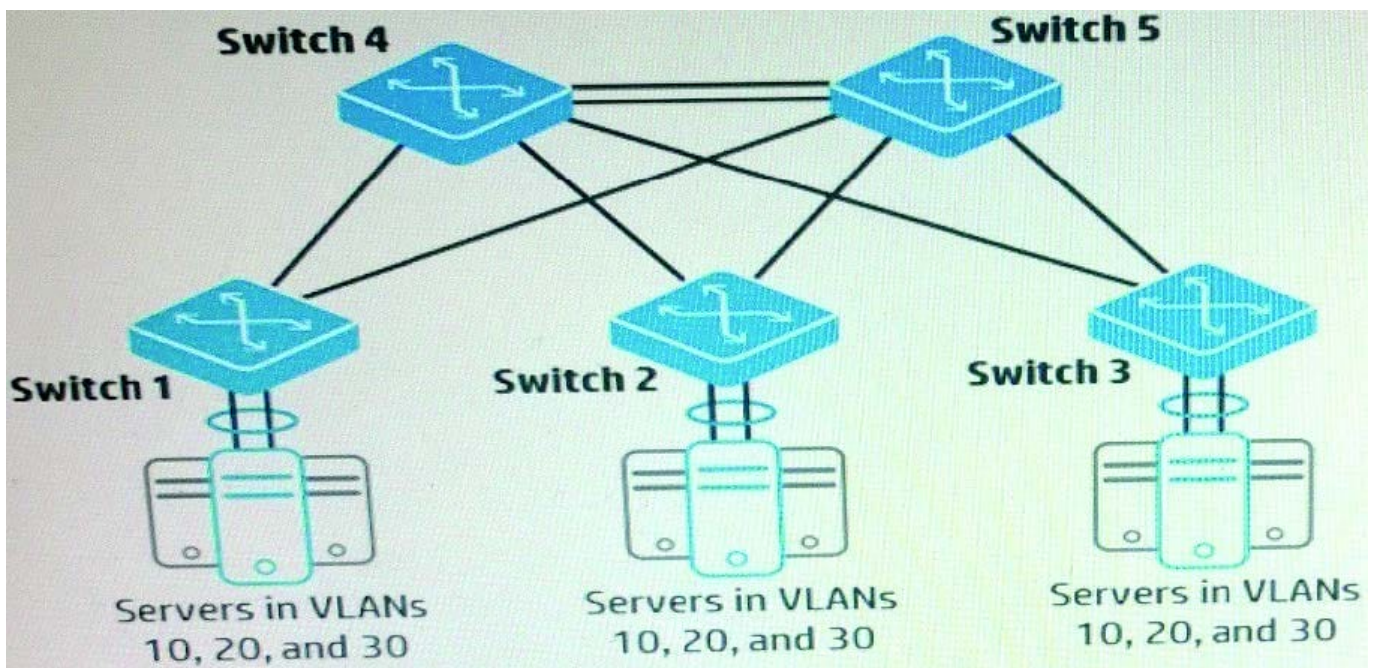



The switches shown in the exhibit form a TRILL region. What helps to load balance traffic across the links between these switches?

- A. The TRILL cost for each link is the same, and TRILL Equal Cost Multi-Path (ECMP) is enabled.
- B. VLANs 10, 20, and 30 are mapped to different spanning tree instances.
- C. The switch-to-switch links are configured to permit at least two VLANs.
- D. Switch 4 and Switch 5 are assigned the same Designated RBridge (DRB) priority.

Correct Answer: A

[HP0-Y51 VCE Dumps](#)

[HP0-Y51 Practice Test](#)

[HP0-Y51 Exam Questions](#)