



# HPE2-Z39<sup>Q&As</sup>

Fast Track - Applying Aruba Switching Fundamentals for Mobility

## Pass HP HPE2-Z39 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/hpe2-z39.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1

What is one requirement to combine Aruba 5400R z12 Series switches in a Virtual Switching Framework (VSF) fabric?

- A. One of the switches must be an Aruba 5412R switch, while the other member can be any switch in the 5400R series.
- B. Both of the members must have two management modules.
- C. The switches must operate in v3-module only mode: any modules of an earlier version are automatically disabled.
- D. The interfaces assigned to the VSF link must be pre-configured as part of a link aggregation.

Correct Answer: A

### QUESTION 2


What is the purpose of the organization string that is set in the System > Admin settings of an Aruba Instant UI?

- A. It configures the SNMP credentials that Aruba AirWave uses to discover the cluster
- B. It directs the cluster to the proper Aruba Activate account for Zero Touch Provisioning (ZTP).
- C. It prevents unauthorized APs, which do not have the correct organization string, from joining the cluster.
- D. It defines the group and folder to which the Instant cluster should be assigned in Aruba AirWave.

Correct Answer: D

### QUESTION 3

Refer to the exhibit.

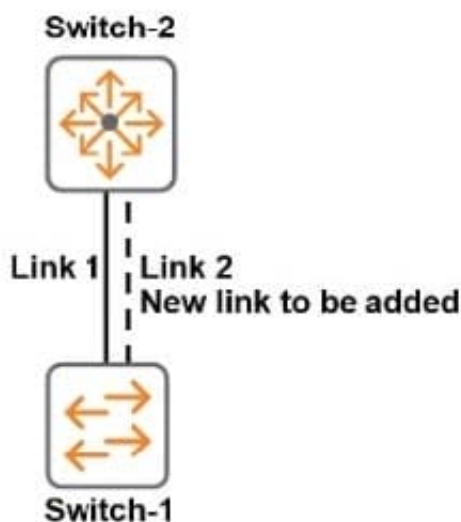



The switches in the exhibit use RSTP. The network administrator needs to add Link 2. Why should the administrator configure Links 1 and 2 as a link aggregation?

- A. to combine traffic statistics for the interfaces
- B. to prevent a loop from occurring
- C. to share traffic more evenly over both links
- D. to automatically apply the settings already configured for Link 1 to Link 2

Correct Answer: C

#### QUESTION 4

Refer to the exhibit.

```
Switch# show ip route
```

IP Route Entries		VLAN	Type	Sub-Type	Metric	Dist.
Destination	Gateway					
10.1.1.0/24	VLAN100	11	connected		1	0
127.0.0.1/32	lo0		connected		1	0


The exhibit shows the IP routing table for an ArubaOS switch. The network administrator then enters these commands:  
`ip routing ip route 0.0.0.0/0 10.1.1.1 ip route 0.0.0.0/0 10.1.1.2 ip route 0.0.0.0/0 10.1.1.3 ip route 0.0.0.0/0 10.1.1.4`

What is the result of this configuration?

- A. The switch only adds the last static route entry to the routing table
- B. All four routes are added to the routing table, but are never used.
- C. The switch load shares connections across the four static next hops.
- D. The switch only adds the last two static route entries to the routing table.

Correct Answer: B

#### QUESTION 5

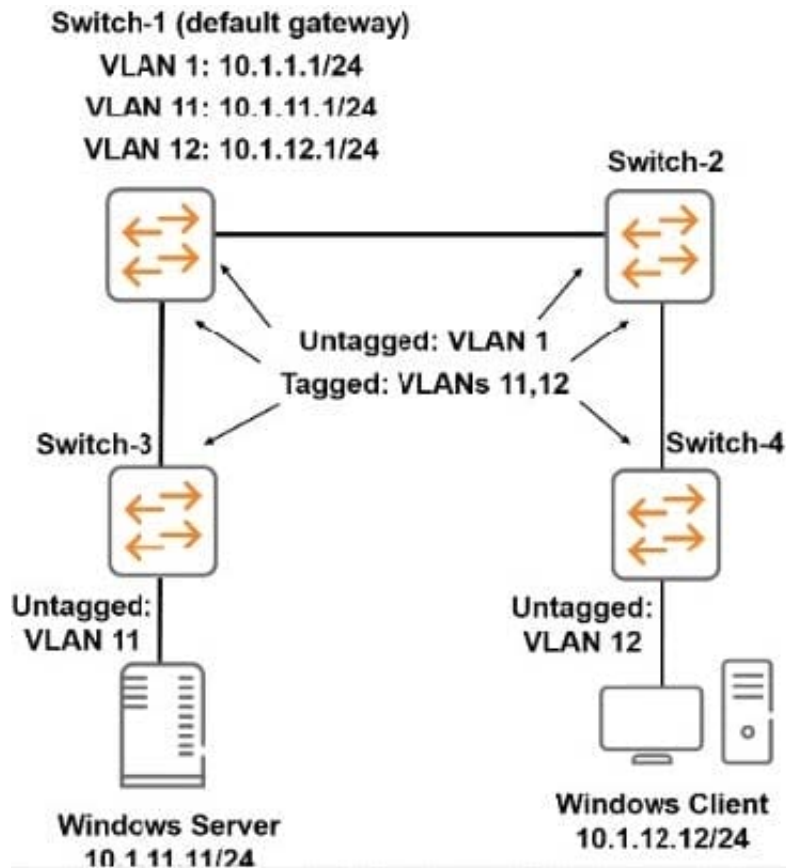

The ArubaOS switches were at default settings. The network administrator configures the VLANs and IP addresses as shown in the exhibit. All inter switch links are untagged for VLAN 1 and tagged for VLANs 11 and 12. There is no additional configuration performed on the switches. The Windows Server and Windows Client are configured to use Switch-1 as their default gateway.

How does this configuration affect the network topology?

- A. The Windows Server and Windows Client cannot ping each other; IP routing must be enabled on all switches in the topology.
- B. The Windows Server and Windows Client cannot ping each other; the VLANs are tagged incorrectly on one or more ports.
- C. The Windows Server and Windows Client can successfully ping each other.
- D. The Windows Server and Windows Client cannot ping each other; IP routing must be enabled on Switch-1.

Correct Answer: C

[HPE2-Z39 PDF Dumps](#)

[HPE2-Z39 VCE Dumps](#)

[HPE2-Z39 Practice Test](#)