



HPE2-Z39^{Q&As}

Fast Track - Applying Aruba Switching Fundamentals for Mobility

Pass HP HPE2-Z39 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/hpe2-z39.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibit.

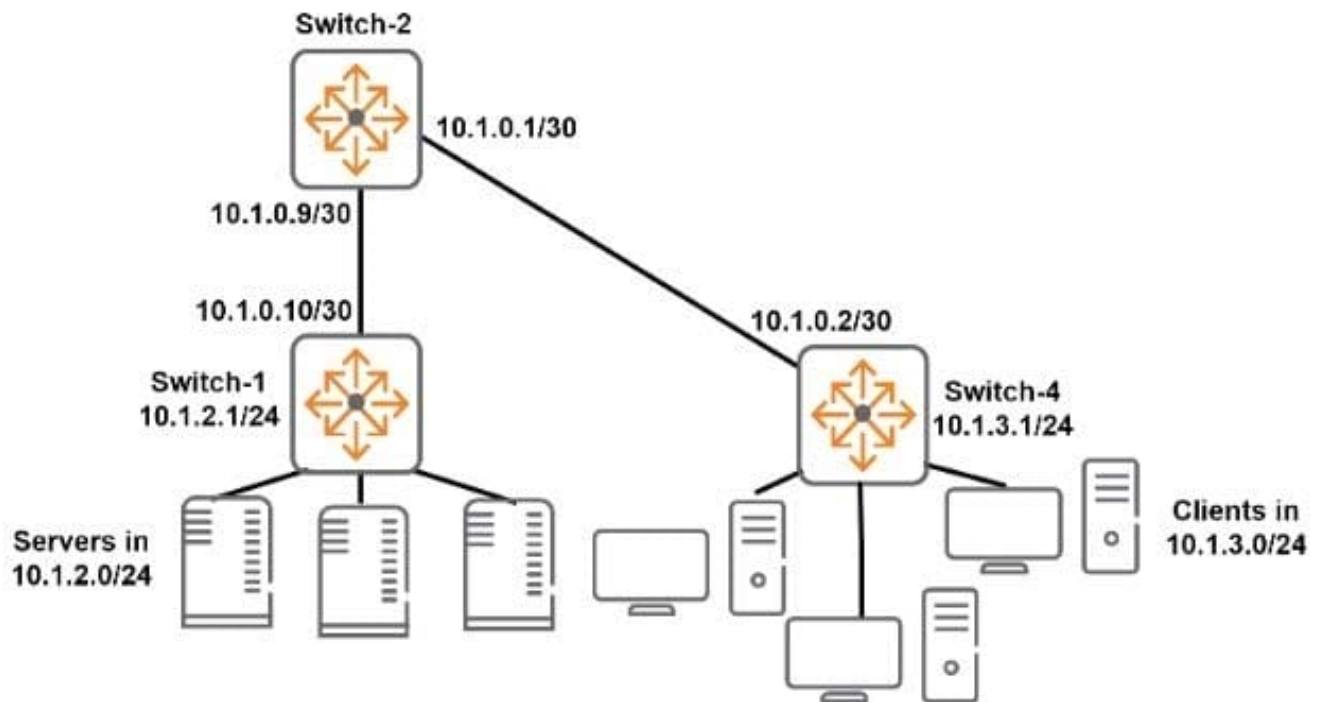

A network administrator creates a route to 10.1.2.0/24 on Switch-4. What is the correct next hop for the route?

- A. 10.1.0.2
- B. 10.1.0.9
- C. 10.1.0.1
- D. 10.1.21

Correct Answer: C

QUESTION 2

A network administrator needs to reach an ArubaOS switch CLI at a management IP address. The administrator also needs to ensure that the switch entirely rejects Telnet and SSH connections from users in data VLANs. How can the administrator meet these goals?

- A. Configure the management IP address on the default VLAN and set a manager password.
- B. Configure the management IP address on the OOBM port and configure the switch to listen for Telnet and SSH only on this port.
- C. Configure the management IP address on any VLAN except the default VLAN. Set a manager and operator



password.

D. Configure the management IP address on a VTY interface and bind an ACL to this interface.

Correct Answer: A

QUESTION 3

An Aruba Virtual Switching Framework (VSF) fabric has 10GbE interfaces assigned to its VSF link. The network administrator wants to change the link to use 40GbE interfaces.

Which procedure follows the best practices and requirements to set up the VSF links?

- A. Create an LACP link aggregation on the 40GbE interfaces, and then add them to the VSF link.
- B. Shut down the standby member, remove the VSF link, and then re-create the link with only 40GbE interfaces.
- C. Create a second VSF link that uses the 40GbE interfaces, and then remove the first VSF link.
- D. Add the 40GbE interfaces to the VSF link, and then remove the 10GbE interfaces from the link.

Correct Answer: A

QUESTION 4

A network administrator has set up a link between two ArubaOS switches. Both switches have an IP address in VLAN 1 and can ping each other in VLAN 1. The administrator then creates VLAN 2 and tags it on the same link of both switches.

- A. How can the administrator verify that the connectivity in VLAN 2 is functional between the two switches? Use either LLDP or ARP to test connectivity.
- B. Use LLDP to test connectivity.
- C. Assign each switch an IP address in VLAN 2. and use ICMP to test connectivity.
- D. Assign each switch an IP address in VLAN 2. and use LLDP to test connectivity.

Correct Answer: B

QUESTION 5

What is the purpose of the organization string that is set in the System > Admin settings of an Aruba Instant UI?

- A. It configures the SNMP credentials that Aruba AirWave uses to discover the cluster
- B. It directs the cluster to the proper Aruba Activate account for Zero Touch Provisioning (ZTP).
- C. It prevents unauthorized APs. which do not have the correct organization string, from joining the cluster.



D. It defines the group and folder to which the Instant cluster should be assigned in Aruba AirWave.

Correct Answer: D

[Latest HPE2-Z39 Dumps](#)

[HPE2-Z39 PDF Dumps](#)

[HPE2-Z39 Braindumps](#)