



HPE6-A45^{Q&As}

Implementing Aruba Campus Switching solutions

Pass HP HPE6-A45 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/hpe6-a45.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

An AOS-Switch needs to be configured to support tunneled node in role-based mode. The Mobility Controller administrators tell the switch administrators that the AOS-Switch will integrate with a cluster of Mobility Controllers. The cluster virtual IP address is 10.1.1.10.

How should switch administrator integrate the AOS-Switch with the cluster?

- A. Double-check the settings with the Mobility Controller administrators because the planned configuration is incomplete with the switch settings.
- B. Configure the virtual IP address as the tunneled-node-server address, tunneled node will work, but the clustering features will not provide redundancy.
- C. Configure the virtual IP address as the tunneled-node-server address. The switch will automatically learn controller IP addresses to which to tunnel various traffic.
- D. Configure the virtual IP address for the primary tunneled-node-server and an actual controller IP address for the backup tunneled-node-server in order to receive redundancy.

Correct Answer: B

QUESTION 2

What is a reason to implement PIM-DM as opposed to PIM-SM?

- A. to control exactly which multicast groups are routed through the network
- B. to permit a higher density of RP routers in the network core
- C. to conserve bandwidth over WAN links
- D. to use on high-bandwidth routed connections

Correct Answer: D

QUESTION 3

Network administrators need to track when traffic matches deny entry in an ACL applied to a port. They want the alert to be sent to a syslog server that is already set up to send logs.

What should administrators do to enable alerts?


- A. Specify the log option for the ACL entry, and enable ACL debugging.
- B. Set the debug destination to session, and enable ACL debugging.
- C. Enable ACL debugging, and enable SNMP port security traps.
- D. Specify the log option for the ACL entry, and enable SNMP port security traps.



Correct Answer: D

QUESTION 4

Refer to the exhibit.

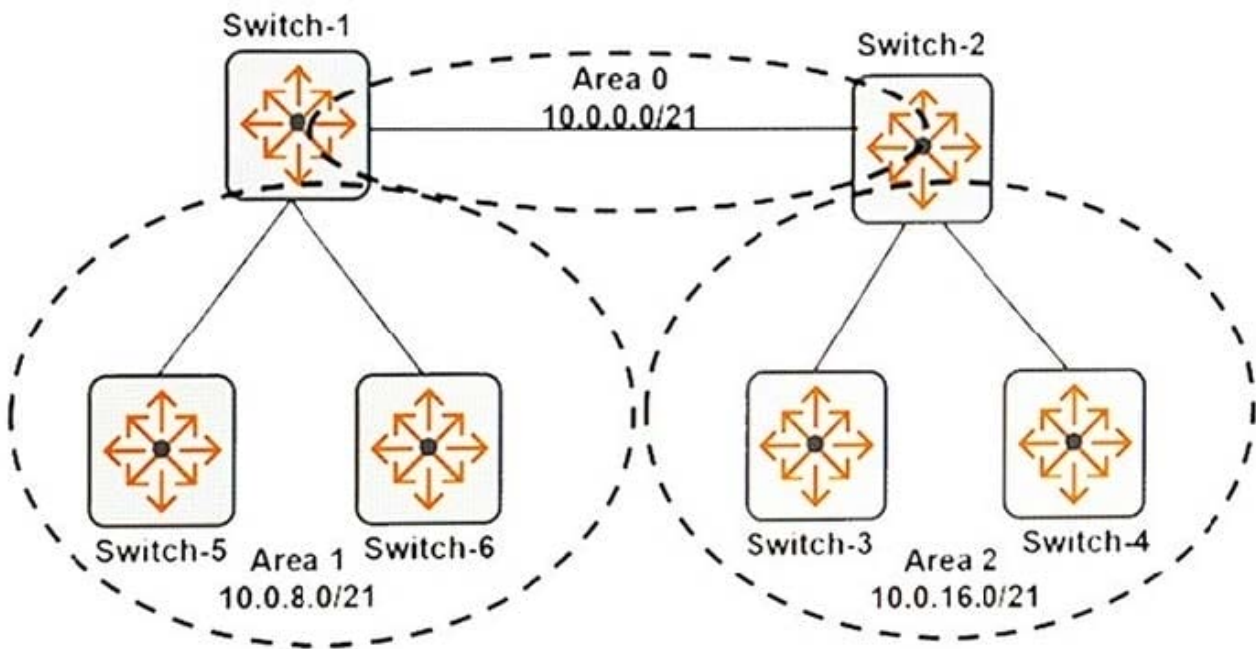

The network administrator wants to summarize routes as much as possible in between areas. What is the correct range to specify for the router OSPF Area 2 command on Switch-2?

- A. 10.0.0.0/20
- B. 10.0.0.0/21
- C. 10.0.8.0/21
- D. 10.0.16.0/21

Correct Answer: D

QUESTION 5

Refer to the exhibits.

Exhibit 1


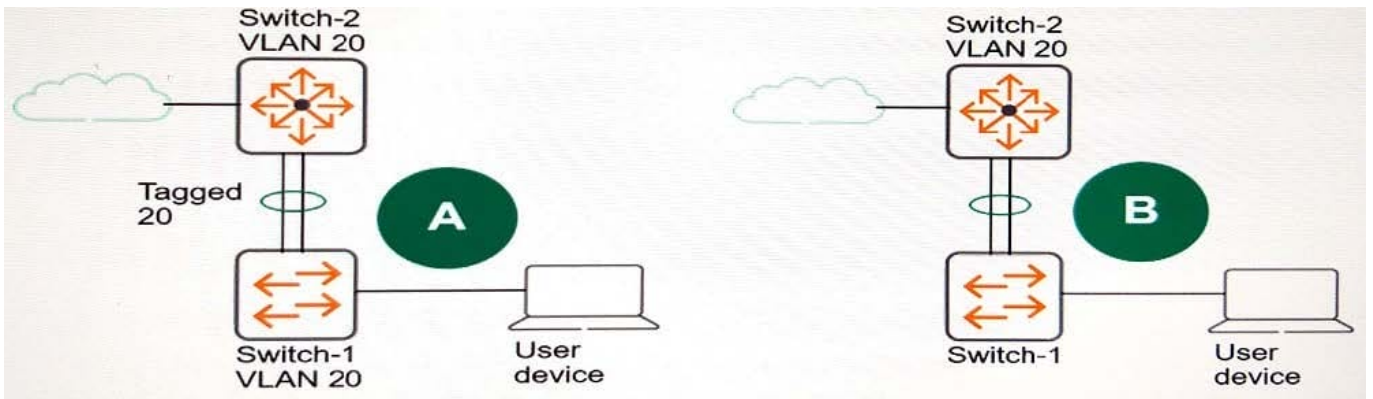


Exhibit 2

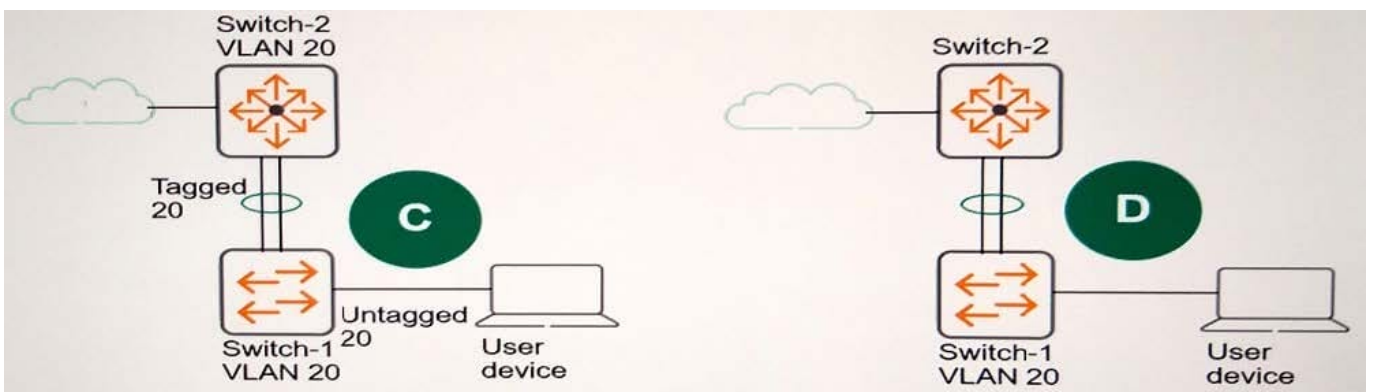

In the exhibits, VLAN 20 under a device name indicates that the device is configured with that VLAN. The exhibits also indicate whether VLAN 20 is statically configured on each link, either as an untagged or a tagged VLAN. If the link has no label, VLAN 20 is not statically configured on that link.

A network administrator needs to deploy AOS-Switches at the access layer. They enforce 802.1X on edge ports. In the exhibits, Switch-1 represents the access layer switches. The plan calls for users to be dynamically assigned to VLAN 20 or VLAN 30, based on identity. If the RADIUS server authorizes the user but does not assign a VLAN, the user should be assigned to VLAN 30. Switch-2 is the default router for the user VLANs.

Which exhibit shows the correct plan for VLAN 20 in the wired infrastructure?

- A. A
- B. B
- C. C
- D. D

Correct Answer: C