



HPE6-A66^{Q&As}

Aruba Certified Design Associate Exam

Pass HP HPE6-A66 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/hpe6-a66.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers






QUESTION 1

NewStellar has a main corporate campus in a business park with two adjacent buildings that are 150 feet apart (46 meters). This is an open campus with no obstructions between the two buildings. Each building has three floors and each floor is 322 x 175 feet (98 x 53 meters) for 56,350 square feet (5,235 square meters) total, which results in a total of 338,100 feet (31,410 square meters) for the entire building space. The ceiling for each floor is 12 feet (3.6 meters) high with a dro

the attached exhibit.

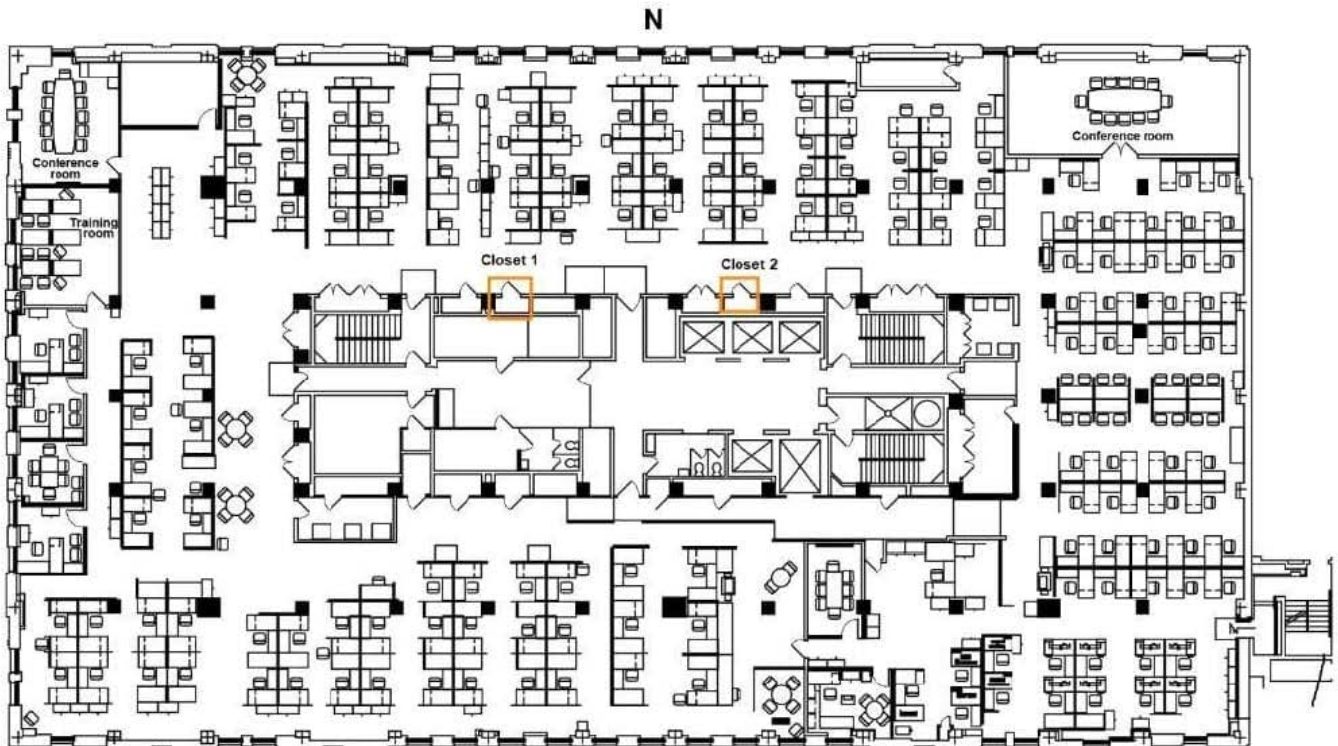

This floor has a central main corridor with washrooms, stairs, elevators and supply, and network cabinets. There are cubicles around the perimeter of the floor. The central part main corridor's dimensions contain 9,350 square feet (870 square meters). The company has determined that Wi-Fi coverage will not include the central area of each floor, which includes the washrooms, stairs, elevators and supply and network cabinets. Based on a capacity design, approximately how many APs should a network architect add to each floor to plan the design in VisualRF?


- A. 40
- B. 10
- C. 20
- D. 30

Correct Answer: C

QUESTION 2



NewStellar has a main corporate campus in a business park with two adjacent buildings. Each building has three floors and each floor is 322 x 175 feet (98 x 53 meters) for 56,350 square feet (5,235 square meters) total. The ceiling for each floor is 12 feet (3.6 meters) high with a dro This floor has a central main corridor with washrooms, stairs, elevators and supply and network cabinets. There are cubicles around the perimeter of the floor. The central part main corridor's dimensions contain 9,350 square feet (870 square meters). Assuming that wireless coverage is not required in the central area, which square footage (square meter) value should a network architect use when determining the number of APs in a capacity design for each floor?

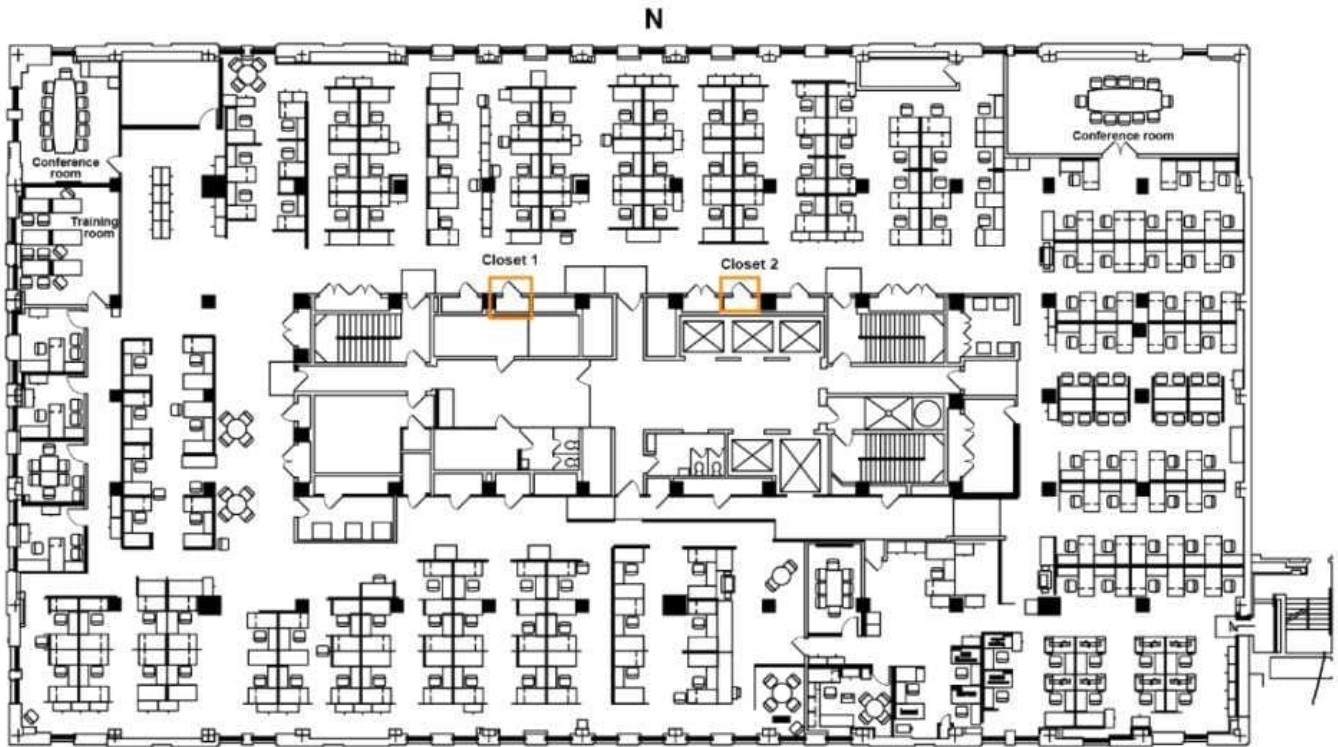

- A. 55,750 square feet (5,175 square meters)
- B. 56,350 square feet (5,235 square meters)
- C. 47,000 square feet (4,365 square meters)
- D. 338,100 feet (31,410 square meters)

Correct Answer: B

QUESTION 3

A customer is purchasing Aruba 555 APs for a new wireless network. The APs will be pre-staged as campus APs (CAPs) and be managed by a controller solution During the pre-staging process, console access to the APs might be necessary.

Which console connection cable should the customer purchase for the 555 APs?

- A. RJ-45
- B. RS-232



C. USB-A

D. Micro-B USB

Correct Answer: D

QUESTION 4

Which component uniquely defines the BSSID when implementing an employee SSID?

A. Case-sensitive SSID name

B. Radio MAC address

C. Wireless device MAC address

D. Case-insensitive SSID name

Correct Answer: C

QUESTION 5

Which feature does the Aruba AP 555 support? (Select three.)

A. 802.11ac and lower standards only

B. desk wall plate mounted

C. three radios

D. weather proof and temperature hardened

E. high density indoor locations

Correct Answer: ACE

[HPE6-A66 Practice Test](#)

[HPE6-A66 Study Guide](#)

[HPE6-A66 Exam Questions](#)