



JN0-1301^{Q&As}

Data Center Design, Specialist (JNCDS-DC)

Pass Juniper JN0-1301 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-1301.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

A customer is using EVPN to maximize their Data Center Interconnect and provide a stretched Layer 2 network to support VM mobility. What are two benefits in this scenario? (Choose two.)

- A. Load balancing is used across the WAN per flow
- B. Layer 2 MAC tables are populated using the control plane
- C. Load balancing is used across the WAN per packet
- D. Layer 2 MAC tables are populated using the data plane

Correct Answer: AB

QUESTION 2

You are designing a Layer 2 fabric implementation for a small data center and have chosen to implement a Virtual Chassis Fabric. You must accommodate two racks of servers with 1 Gbps connectivity, 10 racks of servers with 10 Gbps connectivity, and maintain a single management interface.

Which device would satisfy the requirements in this implementation?

- A. QFX5110
- B. QFX10002
- C. EX4600
- D. EX4300

Correct Answer: A

QUESTION 3

Which two statements about data center design are correct? (Choose two.)

- A. The most efficient traffic flow pattern is 50% east-west and 50% north-south.
- B. A data center that provides hosted services should scale based on customer demands.
- C. A multitier design provides better performance as the number of applications increase.
- D. An application may query several resources in response to a single user request.

Correct Answer: BD

QUESTION 4



Which two statements are true about IP fabrics? (Choose two.)


- A. IP-based applications do not require an overlay network to maintain connectivity.
- B. Applications that require security needs an overlay to provide the security.
- C. Applications that require Layer 2 adjacencies require an overlay network to maintain connectivity.
- D. IP fabrics can natively support both Layer 2 and Layer 3 applications.

Correct Answer: CD

QUESTION 5

Click the Exhibit button.

Referring to the exhibit, what must you change to make the topology a supported Virtual Chassis Fabric design?

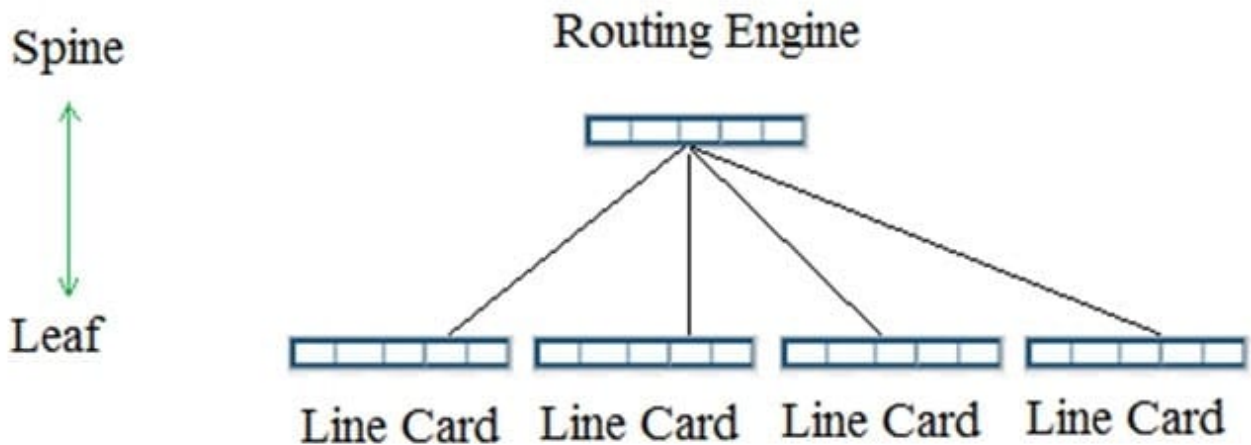

- A. Change the Routing Engine to a line card.
- B. Remove one leaf node.
- C. Add a second spine node.
- D. Change one of the line cards to a VCP master instance.

Correct Answer: C



VCE & PDF

GeekCert.com

<https://www.geekcert.com/jn0-1301.html>

2024 Latest geekcert JN0-1301 PDF and VCE dumps Download

[JN0-1301 PDF Dumps](#)

[JN0-1301 Exam Questions](#)

[JN0-1301 Braindumps](#)