



JN0-1361^{Q&As}

Service Provider Design Specialist (JNCDS-SP)

Pass Juniper JN0-1361 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-1361.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

You are designing an EVPN data center solution with VXLAN. Which two statements are true in this scenario? (Choose two)

- A. The original MAC address is prepended to a VXLAN VNI.
- B. The original MAC address is replaced by a VXLAN VNI.
- C. The original MAC address is encapsulated within the VXLAN frame.
- D. The original MAC address is advertised to remote PEs.

Correct Answer: CD

QUESTION 2

What is the minimum number of nodes in a Junos Space Fabric design?

- A. 2
- B. 3
- C. 5
- D. 1

Correct Answer: D

QUESTION 3

Your team manages a WAN consisting of multiple customer MPLS tunnels. You are asked to design an SDN WAN solution capable of signaling LSPs to avoid nodes or links before they are removed from the network for service.

Which Juniper Network's SDN WAN solution satisfies these requirements?


- A. NorthStar Controller Bandwidth Calendaring
- B. NorthStar Planner Path Design
- C. NorthStar Planner Failure Simulation
- D. NorthStar Controller Maintenance Mode

Correct Answer: B

QUESTION 4



Exhibit: Which routing protocol design will accomplish these goals?

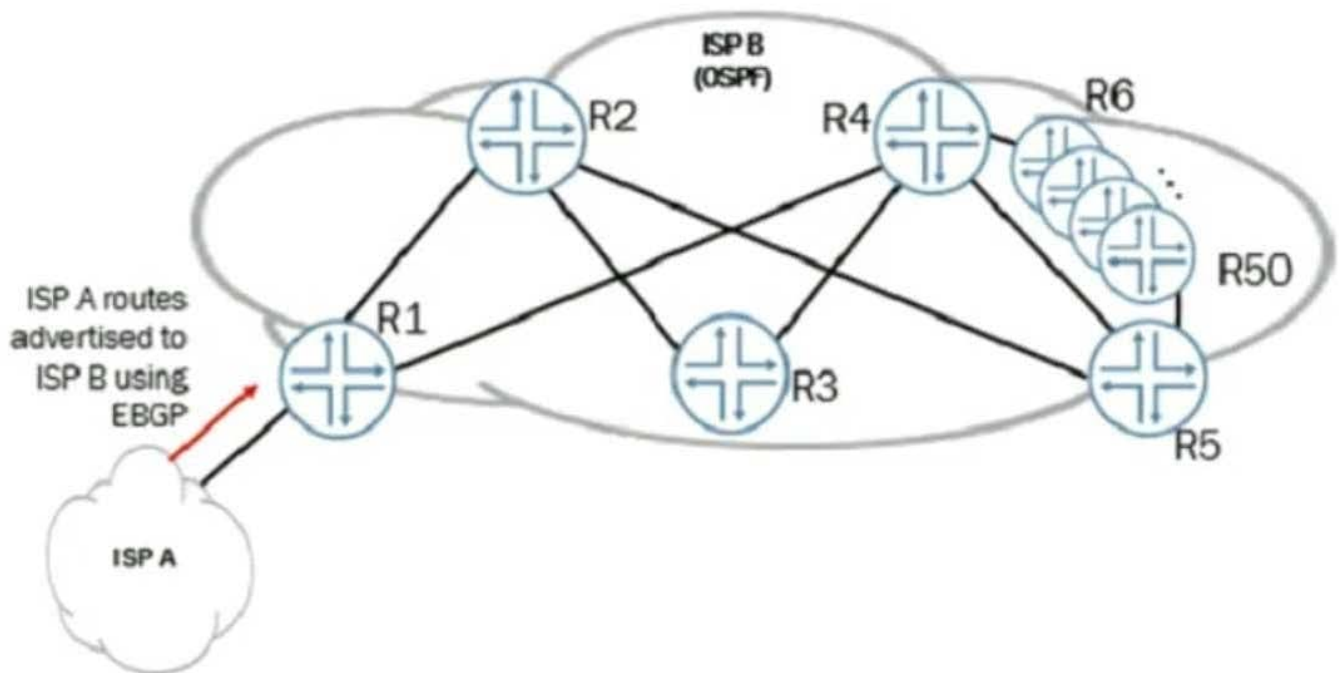

- A. Enable a full mesh of IBGP sessions between the routers in ISP B.
- B. Redistribute the BGP routes learned from ISP A into the OSPF instance running in ISP B.
- C. Configure static routes to ISP A on each router within ISP B.
- D. Configure each router in ISP B to peer with a pair of route reflectors.

Correct Answer: D

QUESTION 5

You are asked to provide a proposal for a service provider's OSPF network. The customer is concerned about the volume of link-state advertisements within their network and want to limit this traffic. Given this scenario which design component would satisfy the customer's requirement?

- A. Use the same AS number.
- B. Use multiple areas.
- C. Use multiple levels.
- D. Use the same router IDs.

Correct Answer: B