



# JN0-347<sup>Q&As</sup>

Enterprise Routing and Switching, Specialist (JNCIS-ENT)

## Pass Juniper JN0-347 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-347.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Click the Exhibit button. Referring to the exhibit, which statement is true?

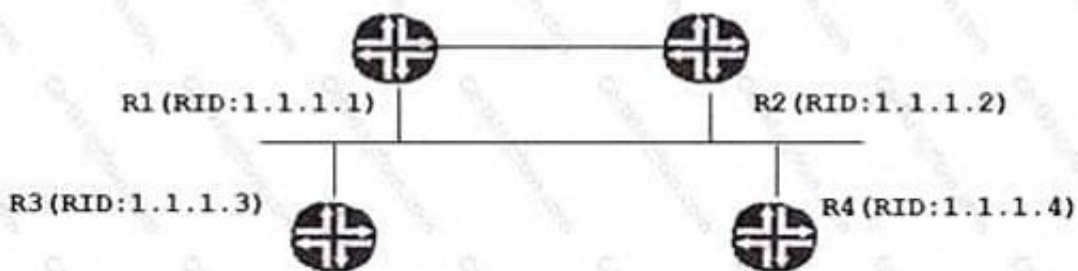

```
user@R1> show ospf neighbor
Address      Interface      State  ID          Pri  Dead
172.25.0.4   ge-0/0/1.0    Full   1.1.1.4     128  33
172.25.0.3   ge-0/0/1.0    Full   1.1.1.3     128  38
172.25.0.2   ge-0/0/1.0    Full   1.1.1.2     254  38

user@R1> show ospf neighbor
Address      Interface      State  ID          Pri  Dead
172.25.0.1   ge-0/0/1.0    Full   1.1.1.1     255  37
172.25.0.2   ge-0/0/1.0    Full   1.1.1.2     254  35
172.25.0.3   ge-0/0/1.0    2Way  1.1.1.3     128  34
```

- A. R3 has the complete OSPF database.
- B. R3 and R4 have an adjacency state of Full.
- C. R4 is elected as the DR.
- D. R1 and R2 are elected as DROTHERs.



Correct Answer: AC

C: In LANs, the election of the designated router takes place when the OSPF network is initially established. When the first OSPF links are active, the routing device with the highest router identifier (defined by the router-id configuration value, which is typically the IP address of the routing device, or the loopback address) is elected the designated router.

## QUESTION 2

What is the default BGP group type on a Junos device?

- A. internal
- B. external
- C. multihop
- D. null

Correct Answer: B

## QUESTION 3

Click the Exhibit button.

```
user@R1# show interface lo0 unit 0
family iso {
  address 49.0001.0192.0168.0001.00;
}

user@R2# show interface lo0 unit 0
family iso {
  address 49.0002.0192.0168.0002.00;
}

user@R3# show interface lo0 unit 0
family iso {
  address 49.0003.0192.0168.0003.00;
}

user@R4# show interface lo0 unit 0
family iso {
  address 49.0003.0192.0168.0004.00;
}
```

Referring to the exhibit, which two statements are true regarding IS-IS adjacencies? (Choose two.)

- A. Level 1 adjacencies can be formed between Router 3 and Router 4.
- B. Level 2 adjacencies can be formed between all routers.



- C. Level 2 adjacencies can only be established between Router 1 and Router 2.
- D. No IS-IS adjacencies can be formed.

Correct Answer: AB

---

#### QUESTION 4

An OSPF hello packet has been sent, but bidirectional communication has not been established. What is the state of the OSPF adjacency?

- A. Down
- B. Init
- C. Exchange
- D. Loading

Correct Answer: A

Down is the first OSPF neighbor state. It means that no information (hellos) has been received from this neighbor, but hello packets can still be sent to the neighbor in this state.

---

#### QUESTION 5

What are three types of bridge protocol data units? (Choose three.)

- A. media endpoint discovery
- B. topology change acknowledgement
- C. topology change notification
- D. type length value
- E. configuration

Correct Answer: BCE

[JN0-347 PDF Dumps](#)

[JN0-347 VCE Dumps](#)

[JN0-347 Braindumps](#)