



JN0-349^{Q&As}

Enterprise Routing and Switching - Specialist (JNCIS-ENT)

Pass Juniper JN0-349 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-349.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

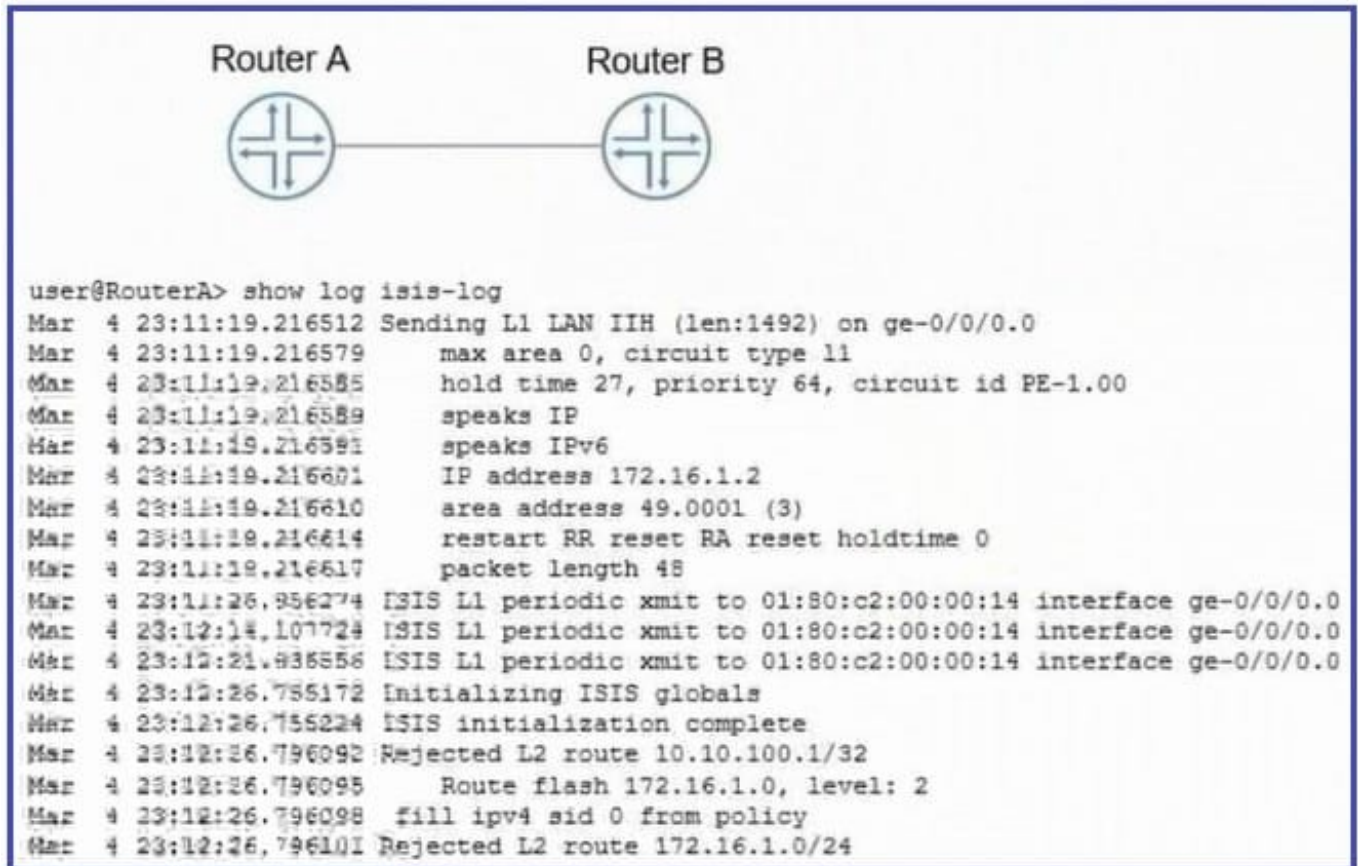

You are trying to form an IS-IS adjacency between Router A and Router B, but the IS-IS adjacency will not form between the two routers.

Referring to the exhibit, which action would solve this problem?

- A. Enable level 1 IS-IS routing on Router A.
- B. Enable IS-IS wide metrics on Router A.
- C. Enable level 2 IS-IS routing on Router B.
- D. Enable IS-IS wide metrics on Router B.

Correct Answer: C

QUESTION 2

You have two routers unable to form an IS-IS Level 1 adjacency.

Which two statements describe a reason for this problem? (Choose two.)



- A. The MTU is set to 1500.
- B. Interface lo0 is not included as an IS-IS interface.
- C. The area numbers are different.
- D. The interfaces are on different subnets.

Correct Answer: CD

QUESTION 3

What is a characteristic of OSPF ASBRs?

- A. ASBRs transmit routing information between the backbone and other areas.
- B. ASBRs cannot be part of the backbone and another area at the same time.
- C. ASBRs inject routing information from outside the OSPF domain.
- D. ASBRs link two OSPF areas.

Correct Answer: C

QUESTION 4

Click the Exhibit button.

Exhibit			
Route	MED	Origin Code	Local Preference
A	10	I	50
B	0	?	150
C	20	E	100
D	10	I	150

A routing table contains multiple BGP routes to the same destination prefix. The route preference is the same for each route.

Referring to the exhibit, which route would be selected?

- A. route B
- B. route D



C. route A

D. route C

Correct Answer: B

QUESTION 5

When electing a DIS in an IS-IS network, what is used to break a priority tie?

A. highest router ID

B. highest MAC address

C. lowest MAC address

D. lowest router ID

Correct Answer: B

Explanation: https://www.juniper.net/documentation/en_US/junos/topics/concept/routing-protocol-is-is-security-designated-router-understanding.html

[JN0-349 PDF Dumps](#)

[JN0-349 Exam Questions](#)

[JN0-349 Braindumps](#)