



# JN0-349<sup>Q&As</sup>

Enterprise Routing and Switching - Specialist (JNCIS-ENT)

## Pass Juniper JN0-349 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-349.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1


What are two functions of bridging? (Choose two.)

- A. blocking
- B. aging
- C. listening
- D. forwarding

Correct Answer: CD

### QUESTION 2

Referring to the exhibit, which two statements are correct? (Choose two.)

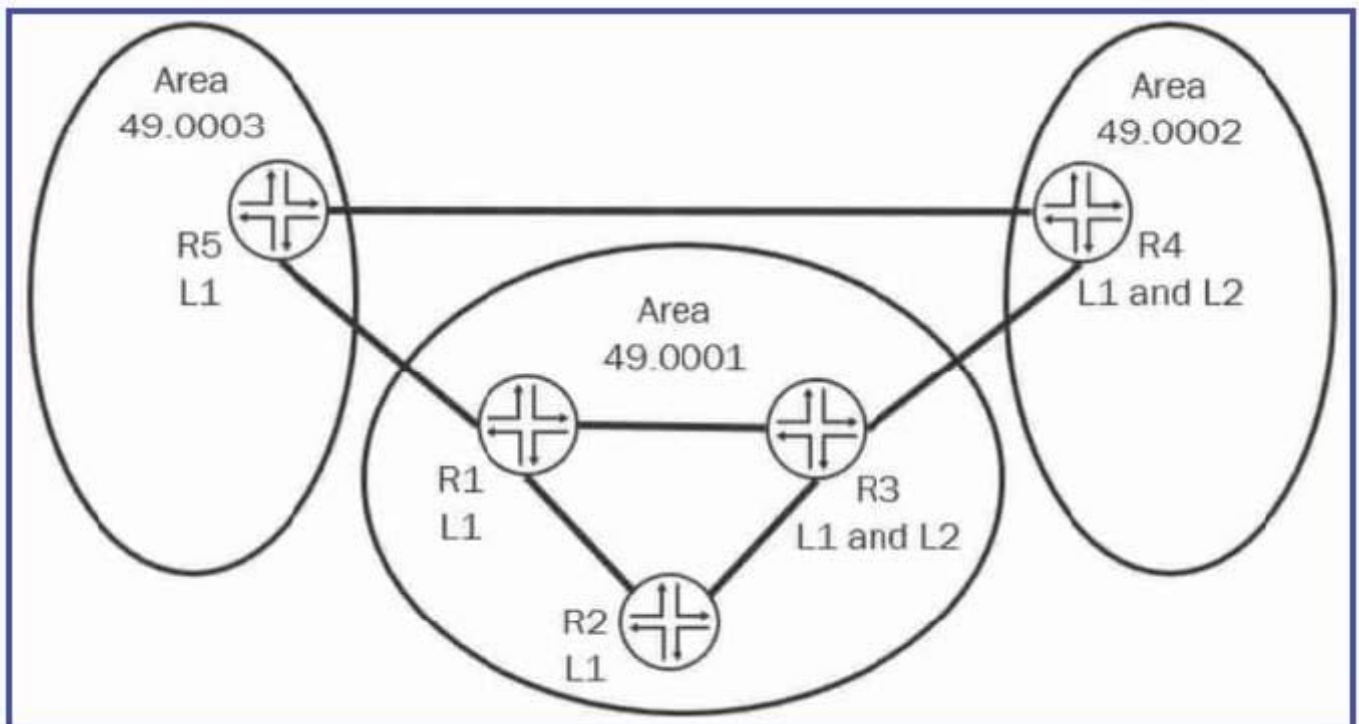

- A. R2 and R3 can form a Level 1 IS-IS adjacency.
- B. R4 and R5 can form a Level 1 IS-IS adjacency.
- C. R1 and R5 can form a Level 1 IS-IS adjacency.
- D. R3 and R4 can form a Level 2 IS-IS adjacency.

Correct Answer: AD



### QUESTION 3

Click the Exhibit button.

```
[edit routing-options]
user@router# show | display inheritance no-comments
static {
  defaults {
    preference 20;
  }
  route 0.0.0.0/0 {
    next-hop 172.18.1.1;
    preference 5;
  }
  route 192.168.1.2/32 next-hop 172.20.111.10;
  route 192.168.2.0/30 next-hop [ 172.20.66.2 172.20.77.2 ];
  route 172.20.112.0/24 next-hop [ 172.20.66.2 172.20.77.2 ];
}
```

Which two statements about the configuration shown in the exhibit are correct? (Choose two.)

- A. Two next-hop interfaces should appear in the routing table for the 172.20.112.0/24 prefix.
- B. Multiple equal-cost next hops are installed in the forwarding table for the 192.168.2.0/30 prefix.
- C. The route preference is the same for each static route.
- D. Only the selected next-hop interface should appear in the forwarding table for the 172.20.112.0/24 prefix.

Correct Answer: AD

### QUESTION 4

Click the Exhibit button.

You are implementing the network shown in the exhibit. You must ensure that all users can communicate with each other.

What are three steps that should be taken in this scenario? (Choose three.)

- A. You must specify the appropriate Layer 3 IRB interface under each VLAN.
- B. You must define all ports as trunk ports and include all VLANs as members.
- C. You must define all ports as access ports and include the appropriate VLAN as a member.
- D. You must configure a single logical IRB interface with an IP address for each of the three networks.



E. You must create a unique logical IRB interface for each network and assign an IP address within the appropriate network.

Correct Answer: ACE

---

#### QUESTION 5

Which mechanism is used to share routes between routing tables?

- A. RIB groups
- B. routing instances
- C. forwarding instances
- D. filter-based forwarding

Correct Answer: A

[JN0-349 VCE Dumps](#)

[JN0-349 Practice Test](#)

[JN0-349 Braindumps](#)