



JN0-363^{Q&As}

Service Provider Routing and Switching Specialist (JNCIS-SP)

Pass Juniper JN0-363 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-363.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Which BGP message type is used to re-advertise routes that have already been sent to a peer and acknowledged using TCP?


- A. update
- B. keepalive
- C. notification
- D. refresh

Correct Answer: D

Explanation: The BGP (Border Gateway Protocol) refresh message is used to request the re-advertisement of the IPv4 unicast or multicast routing information that was previously sent by the sender to the receiver and acknowledged using TCP. This message helps in refreshing the routes in case of route table changes or to ensure that the receiver has the latest and most accurate routing information.

QUESTION 2

Exhibit

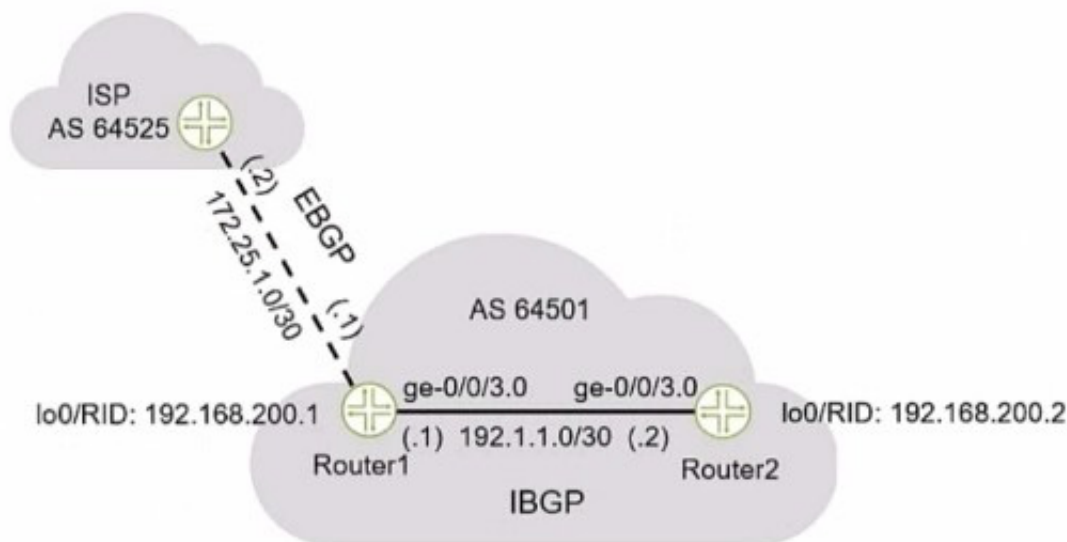

```
[edit]
user@Router1# show protocols bgp
group External {
    peer-as 64525;
    neighbor 172.25.1.2;
}
```

Referring to the exhibit, what must be included in the Route1 configuration when establishing an EBGP session with the



ISP?

- A. A local address must be specified.
- B. A local AS must be specified.
- C. The BGP session type internal must be specified.
- D. The BGP session type external must be specified.

Correct Answer: A

QUESTION 3

You are asked to configure filter-based forwarding on a Junos device. Which two statements are correct in this scenario? (Choose two.)


- A. You must create a routing policy.
- B. You must create a route target.
- C. You must create and apply a match filter.
- D. You must create a routing instance.

Correct Answer: CD

Explanation: To configure filter-based forwarding, perform the following tasks: Create a match filter on the ingress device. To specify a match filter, include the filter filter-name statement at the [edit firewall] hierarchy level. A packet that passes through the filter is compared against a set of rules to classify it and to determine its membership in a set. Once classified, the packet is forwarded to a routing table specified in the accept action in the filter description language. The routing table then forwards the packet to the next hop that corresponds to the destination address entry in the table. Create routing instances that specify the routing table(s) to which a packet is forwarded, and the destination to which the packet is forwarded at the [edit routing-instances] hierarchy level.

QUESTION 4

Exhibit

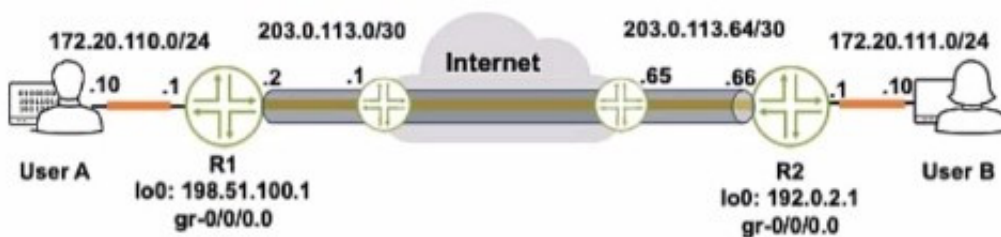

Referring to the exhibit, how do you verify the status of the tunnel from R1?



-
- A. Issue the ping 172.20.111.10 source 172.20.110.1 command.
 - B. Issue the ping 172.20.111.10 source 198.51.100.1 command.
 - C. Issue the ping 172.20.iii.io source 203.0.113.2 command.
 - D. Issue the ping 172.20. III. 10 command.

Correct Answer: C

QUESTION 5

What is the correct order of BGP attributes for active route selection?

- A. next hop -> local preference -> AS path -> MED -> origin
- B. next hop -> AS path -> local preference -> origin -> MED
- C. next hop -> local preference -> AS path -> origin -> MED
- D. next hop -> origin -> local preference -> AS path -> MED

Correct Answer: C

[JN0-363 PDF Dumps](#)

[JN0-363 Practice Test](#)

[JN0-363 Braindumps](#)