



JN0-363^{Q&As}

Service Provider Routing and Switching Specialist (JNCIS-SP)

Pass Juniper JN0-363 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-363.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

You are adding an IPv6 configuration to an Interface on a Junos device.


In this scenario, which statement is correct?

- A. The link local address must be manually configured within the fd00::/8 prefix range.
- B. The link local address must be manually configured within the fe80::/10 prefix range.
- C. The link local address is automatically created using the MAC address within the fe80::/10 prefix range.
- D. The link local address is automatically created using the MAC address within the fd00::/8 prefix range.

Correct Answer: D

QUESTION 2

Exhibit

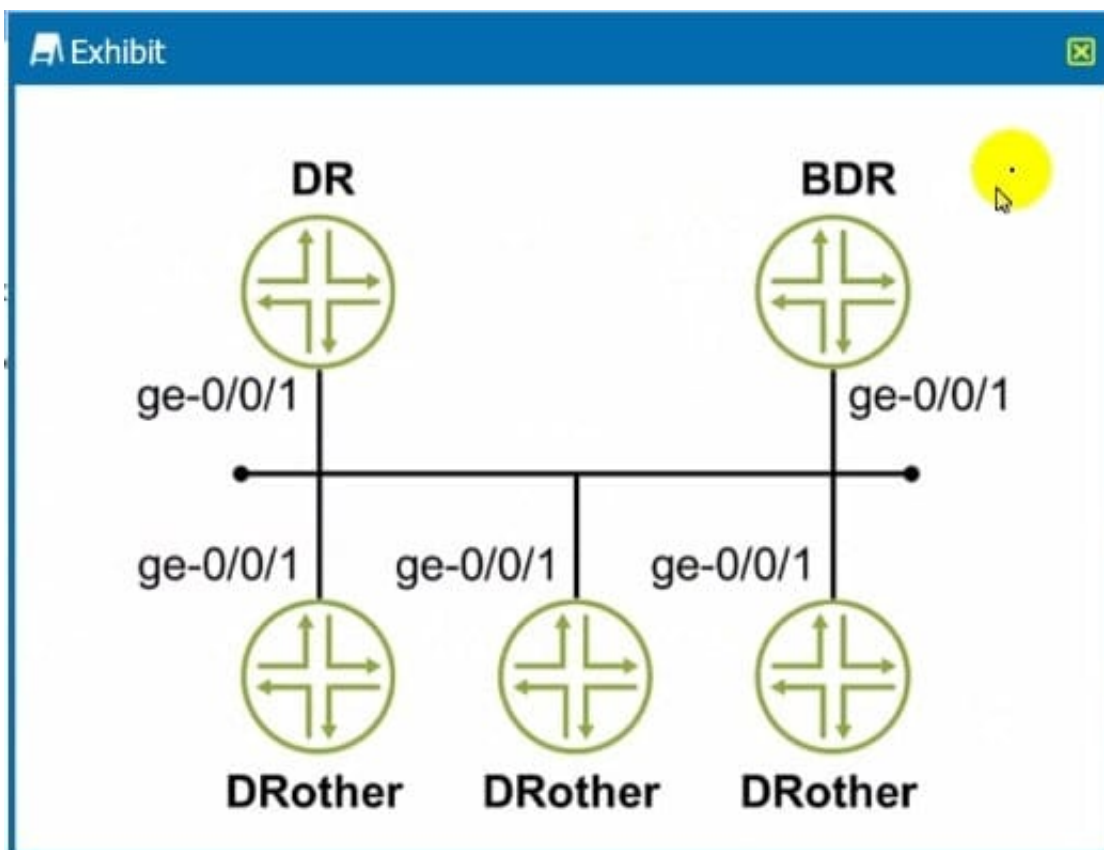

You are asked to configure the OSPF environment to prevent the DRoother routers from participating in DR/BDR election. Referring to the exhibit, which command will accomplish this task?

- A. `set protocols ospf area 0.0.0.0 interface ge-0/0/1 priority 255`



- B. set protocols ospf area 0.0.0.0 interface ge-0/0/1 priority 0
- C. set protocols ospf area 0.0.0.0 interface ge-0/0/1 interface-type nbma
- D. set protocols ospf area 0.0.0.0 interface ge--0/0/1 interface-type p2p

Correct Answer: A

QUESTION 3

Which BGP attribute is used to detect routing loops?

- A. AS path
- B. MED
- C. local preference
- D. next hop

Correct Answer: A

QUESTION 4


You are bringing a new network online with three IS-IS routers using default Junos election priorities. The routers are configured as Level 2 only IS-IS routers. Which statement is true about the DIS election in this scenario?

- A. The router with the highest MAC address will be elected as the DIS.
- B. The router with the highest numerical lo0 IP address will be elected as the DIS.
- C. The router with the lowest numerical lo0 IP address will be elected as the DIS.
- D. The router with the lowest MAC address will be elected as the DIS.

Correct Answer: B

QUESTION 5

Exhibit

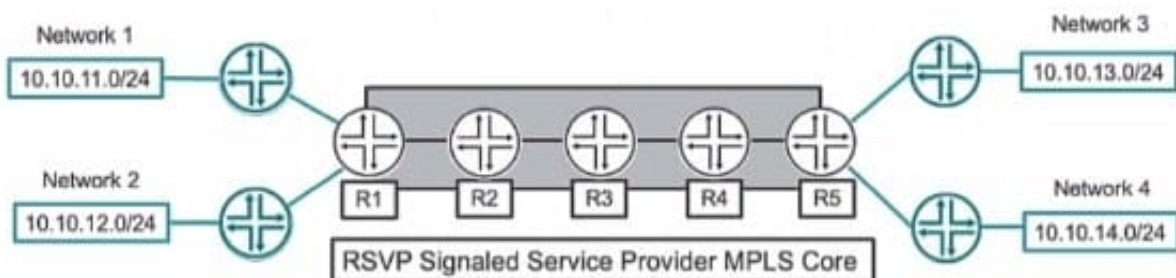



Referring to the exhibit, what is the minimum number of LSPs required to support all four networks?

- A. 1
- B. 2
- C. 8
- D. 4

Correct Answer: C

[JN0-363 VCE Dumps](#)

[JN0-363 Study Guide](#)

[JN0-363 Braindumps](#)