



JN0-363^{Q&As}

Service Provider Routing and Switching Specialist (JNCIS-SP)

Pass Juniper JN0-363 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-363.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.

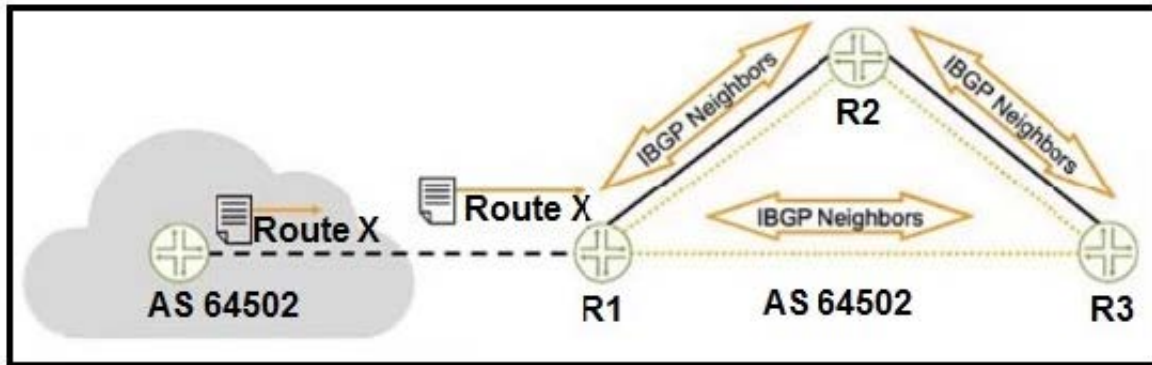

Referring to the exhibit, from which device(s) does R3 learn about Route X?


- A. both R2 and R1
- B. R1 only
- C. directly from the router in AS 64502
- D. R2 only

Correct Answer: B

Explanation: R2 can not forward IBGP learned routes to another IBGP neighbor correct

QUESTION 2

Exhibit

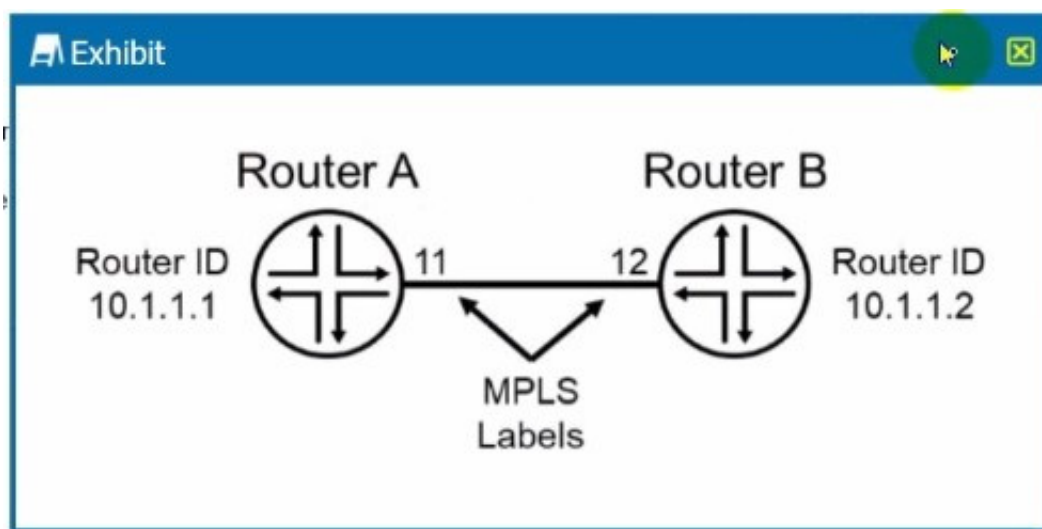



The routers shown in the exhibit are configured for segment routing.

In this scenario, what is the adjacency SID that Router B advertises to Router A?

- A. 12
- B. 10.1.1.1
- C. 10.1.1.2
- D. 11

Correct Answer: B

QUESTION 3

An OSPF router does not have a router ID configured.

In this scenario, which statement is correct about the router ID?

- A. The Junos OS will use the IP address assigned to the interface with the lowest MAC address.
- B. A router ID will not be assigned until it is manually configured.
- C. The Junos OS will use the IP address assigned to the loopback interface for the router ID.
- D. The Junos OS will use the IP address assigned to the interface with the highest priority.

Correct Answer: C

Explanation: The router identifier is used by BGP and OSPF to identify the routing device from which a packet originated. The router identifier usually is the IP address of the local routing device. If you do not configure a router identifier, the IP address of the first interface to come online is used. This is usually the loopback interface. Otherwise, the first hardware interface with an IP address is used

QUESTION 4

Which configuration setting prohibits a static route from being redistributed by a dynamic routing protocol?

- A. route-filter
- B. no-readvertise
- C. qualified-next-hop
- D. passive

Correct Answer: B

QUESTION 5



Which OSPF database packet determines which router is in charge of the database synchronization and the transferring of LSA headers between the two systems?

- A. link-state request
- B. database description
- C. hello
- D. link-state update

Correct Answer: B

Explanation: the Database Description (DD) packets serve two main purposes:

1.
determining which router is in charge of the database synchronization
2.
transferring the LSA headers between the two systems

[Latest JN0-363 Dumps](#)

[JN0-363 VCE Dumps](#)

[JN0-363 Exam Questions](#)