



# JN0-647<sup>Q&As</sup>

Enterprise Routing and Switching Exam

**Pass Juniper JN0-647 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-647.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers





### QUESTION 1

You configured static mode power management on an EX4300 to provide PoE power to telephone and access point equipment.

Which statement is correct regarding the PoE power budget?

- A. Power is budgeted to devices on a first come, first served basis as devices are connected.
- B. The power budgeted will be based on the device class connected to each port.
- C. Power is budgeted to a port even if no device is connected to the port.
- D. The power budgeted to ports will adjust to how much power a device actually uses.

Correct Answer: C

---

### QUESTION 2

Click the Exhibit button.



```
{master:0} [edit]
user@switch# show interfaces ge-0/0/1
native-vlan- id 20;
unit 0 {
    family Ethernet-switching {
        interface-mode trunk;
        vlan {
            members [20 voice];
        }
    }
}

{master:0} [edit]
user@switch# show protocols lldp-med

{master:0} [edit]
user@switch# show switch- options

{master:0} [edit]
user@switch# show vlans
data {
    vlan-id-20;
    13-interface irb.20;
}
voice {
    vlan-id 30;
}
```

You have a workstation and VoIP phone connected to port ge-0/0/1 on an access switch. Referring to the configuration shown in the exhibit, which statement is true?

- A. The phone will require a manual VLAN ID configuration.
- B. Untagged frames that enter the switch on interface ge-0/0/1 will be dropped.
- C. All frames that leave the switch on interface ge-0/0/1 will be tagged.
- D. The phone will not be able to communicate over the network.

Correct Answer: C

---

### QUESTION 3

What information must you gather from the satellite device to provision a Junos Fusion Enterprise deployment on the aggregation device? (Choose two.)




- A. MAC address
- B. Serial number
- C. Software version
- D. Model number

Correct Answer: AB

#### QUESTION 4

Click the Exhibit button.

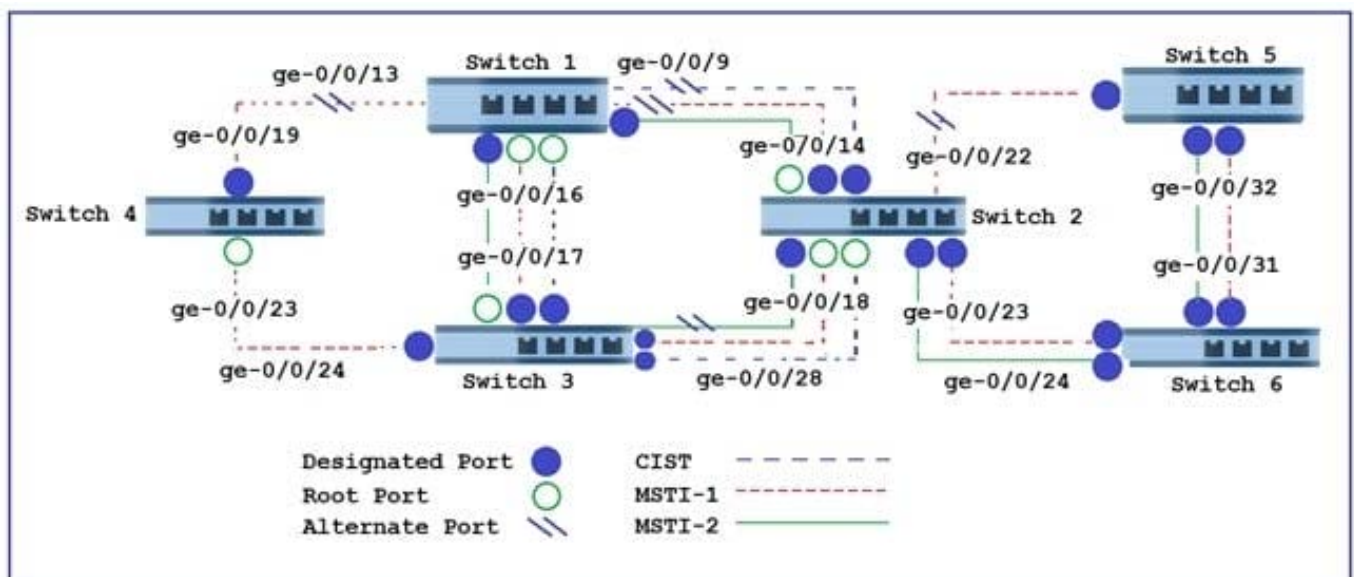

Switch 4 is rebooted as shown in the exhibit.

Which statement is correct in this scenario?

- A. CIST is reconverged.
- B. MSTI-1 is reconverged.
- C. CIST generates notification events.
- D. MSTI-2 is reconverged.

Correct Answer: B

#### QUESTION 5

You have certainly implemented the configuration shown in the exhibit. After committing these changes, the community devices connected to AS-1 are not able to communicate with the appropriate community devices connected to AS-2.



What must be done to allow these community devices to communicate?

- A. You must configure an isolation VLAN ID Under the pvlan-200 on the AS2 switch
- B. You must configure the ge-0/0/10 interface on AS1 AS THE VPLAN on both switches
- C. You must configure an isolation VLAN ID under the VLAN 200 ON both switches
- D. You must configure the ge-0/0/12 interface on both switches as P VLAN trunks

Correct Answer: D

[Latest JN0-647 Dumps](#)

[JN0-647 Practice Test](#)

[JN0-647 Exam Questions](#)