



JN0-648^{Q&As}

Enterprise Routing and Switching, Professional (JNCIP-ENT)

Pass Juniper JN0-648 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-648.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.

```
{master:0} [edit]
user@router# show firewall three-color-policer main-policer
action {
    loss-priority high then discard;
}
single-rate{
    color-aware;
    committed-information-rate 40m;
    committed-burst-size 100k;
    excess-burst-size 200k;
}
```


You have configured and applied the policer shown in the exhibit to your Junos device. Which statement is true in this scenario?

- A. Traffic exceeding the committed-burst size will be marked with a loss priority of high.
- B. Traffic exceeding the excess-burst size will be discarded.
- C. Traffic exceeding the committed-information-rate will be rate limited.
- D. Traffic exceeding the committed-burst size will be discarded.

Correct Answer: A

QUESTION 2

Click the Exhibit button.

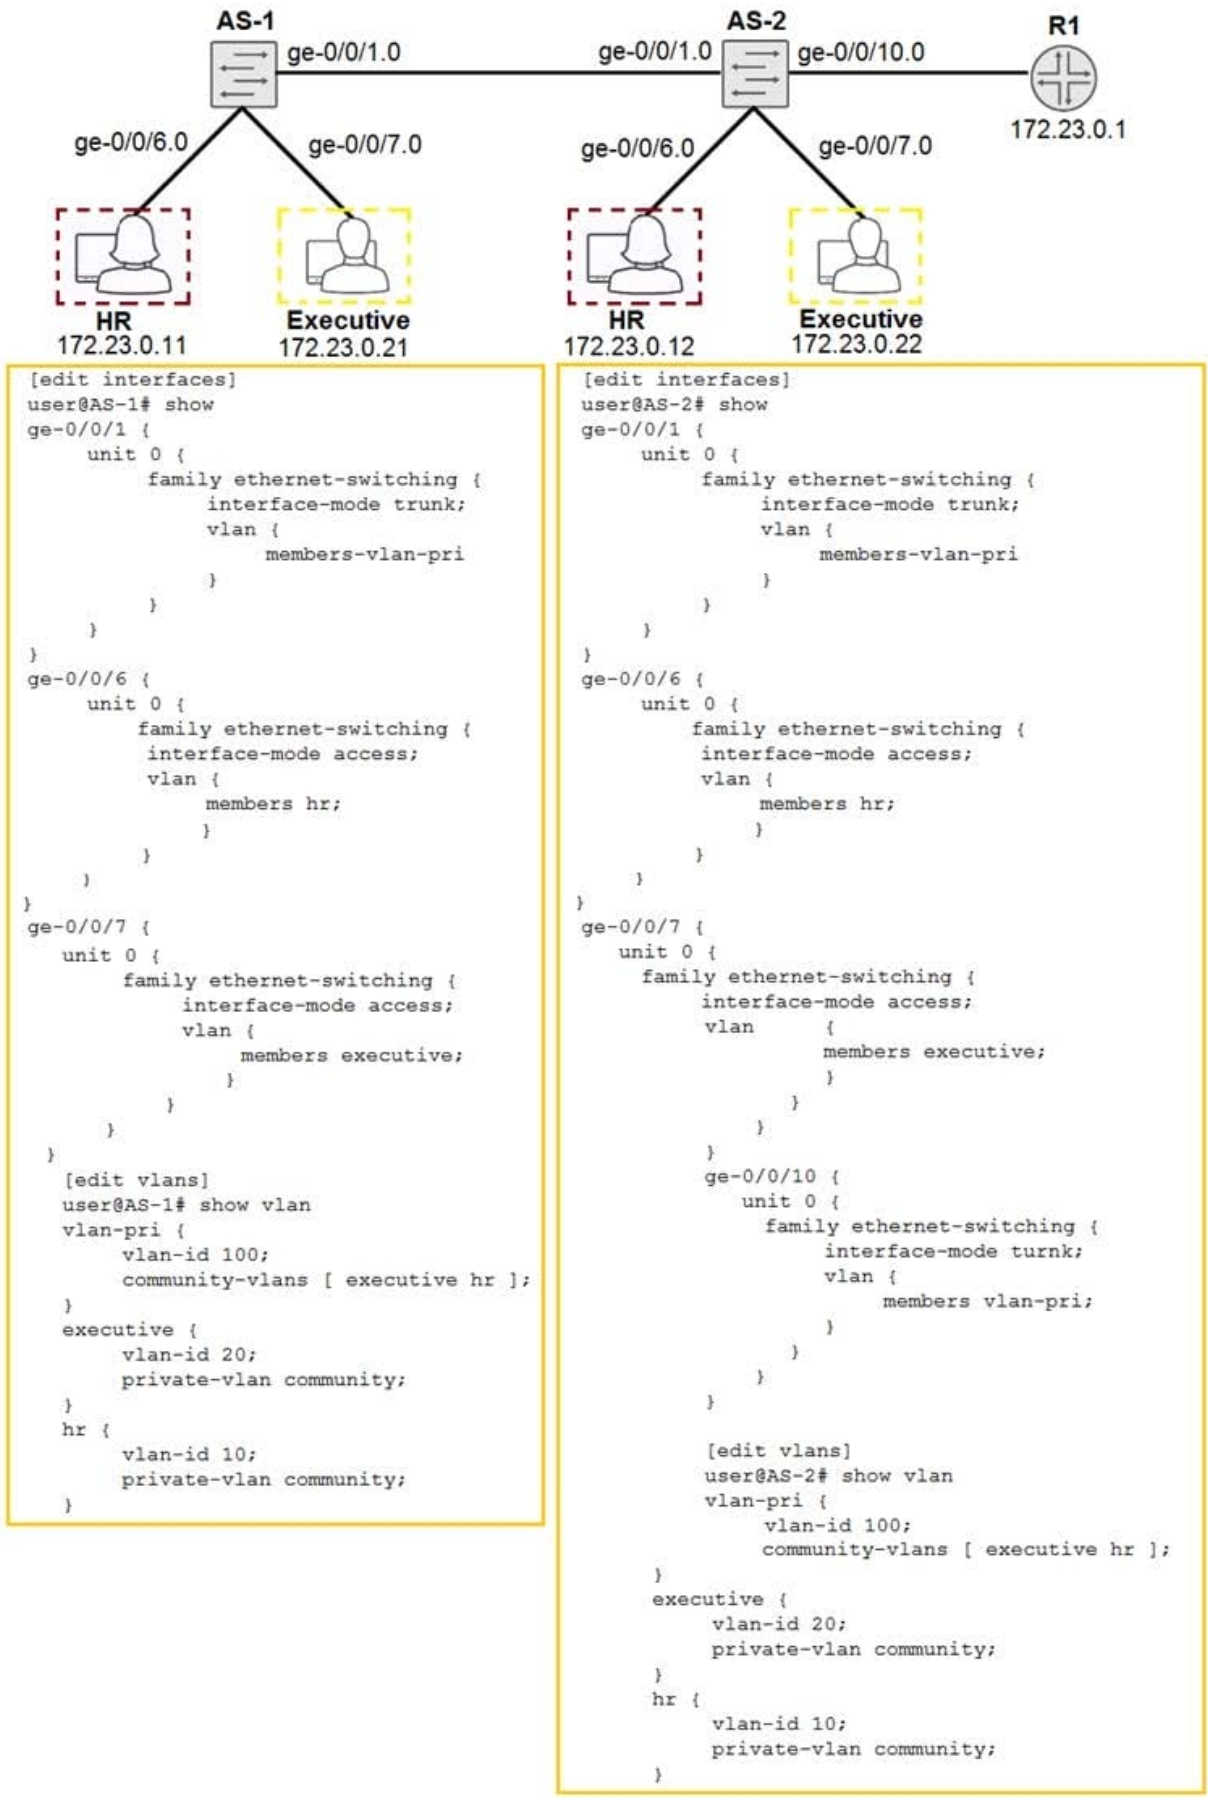



You recently implemented the configuration shown in the exhibit. After committing these changes, the community devices connected to AS-1 are not able to communicate with the appropriate community devices connected to AS-2.

What must be done to allow these community devices to communicate?

- A. You must configure an isolation VLAN ID under the vlan-pri VLAN on the AS-2 switch.
- B. You must configure the ge-0/0/10 interface on AS-1 as the inter-switch link
- C. You must configure the ge-0/0/1 interface on both switches as the inter-switch links.
- D. You must configure an isolation VLAN ID under the vlan-pri VLAN on both switches.

Correct Answer: C

QUESTION 3

Your company has expanded into office space across the street. The new office space has a single Ethernet connection connected to an unmanaged switch. You must sort traffic based on the IP address into different VLANs once the traffic arrives on your EX Series switches.

Which mechanism would you use to accomplish this task?

- A. MVRP
- B. filter-based VLANs
- C. Q-in-Q tunneling
- D. dynamic VLANs

Correct Answer: B

QUESTION 4

Click the Exhibit button.



```
user@router> show ospf interface extensive
ge-0/0/0.0      PtToPt      0.0.0.0      0.0.0.0      0.0.0.0      1
  Type: P2P, Address: 10.10.10.14, Mask: 255.255.255.252, MTU: 1500, Cost: 1
  Adj count: 1
  Hello: 10, Dead: 40, ReXmit: 5, Not Stub
  Auth type: None
  Protection type: None
  Topology default (ID 0) -> Cost: 1
ge-0/0/1.0      DR 0.0.0.0      172.29.0.4      172.29.0.2      1
  Type: LAN, Address: 10.10.10.10. Mask: 255.255.255.252, MTU: 1500, Cost: 1
  DR addr: 10.10.10.10, BDR addr: 10.10.10.9, Priority: 128
  Adj count: 1
  Hello: 10, Dead: 40, ReXmit: 5, Not Stub
  Auth type: None
  Protection type: None
  Topology default (ID 0) -> Cost: 1
```

Referring to the exhibit, which two statements are true? (Choose two.)

- A. There can be more than one OSPF neighbor on the ge-0/0/1 interface.
- B. There can be more than one OSPF neighbor on the ge-0/0/0 interface.
- C. There is no need for a DR for the ge-0/0/0 interface.
- D. The DR election process is not finished for the ge-0/0/0 interface.

Correct Answer: AC

QUESTION 5

In a Layer 2 environment where 802.1X is deployed, which two statements are correct? (Choose two.)

- A. RADIUS messages are exchanged between the supplicant and the authenticator.
- B. RADIUS messages are exchanged between the authenticator and the authentication server.
- C. Extensible Authentication Protocol messages are exchanged between the authenticator and the authentication server.
- D. Extensible Authentication Protocol messages are exchanged between the supplicant and the authenticator.

Correct Answer: BD