



JN0-662^{Q&As}

Service Provider Routing and Switching - Professional (JNCIP-SP)

Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-662.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

How is a BGP Layer 2 VPN prefix formed by a PE?

- A. by combining the route distinguisher and vrf-target, in that order
- B. by combining the route distinguisher, remote site identifier, and site identifier, in that order
- C. by combining the route distinguisher, site identifier, and remote site identifier, in that order
- D. by combining the vrf-target and route distinguisher, in that order

Correct Answer: C

QUESTION 2

You want to use IS-IS on a GRE interface where the underlying Layer 3 MTU is 1500.


Which statement is correct in this scenario?

- A. IS-IS can be used because every IS-IS interface must be capable of transmitting packets at least as large as 1476 bytes, and the GRE header is 24 bytes.
- B. IS-IS can be used, but the networking device directly attached to the circuit must be capable of fragmentation.
- C. IS-IS cannot be used, but the router can enable a GRE key that serves the same function as IS-IS.
- D. IS-IS cannot be used because the IS-IS hello is not allowed to be fragmented and has the DF bit set.

Correct Answer: B

QUESTION 3

Click the Exhibit button.

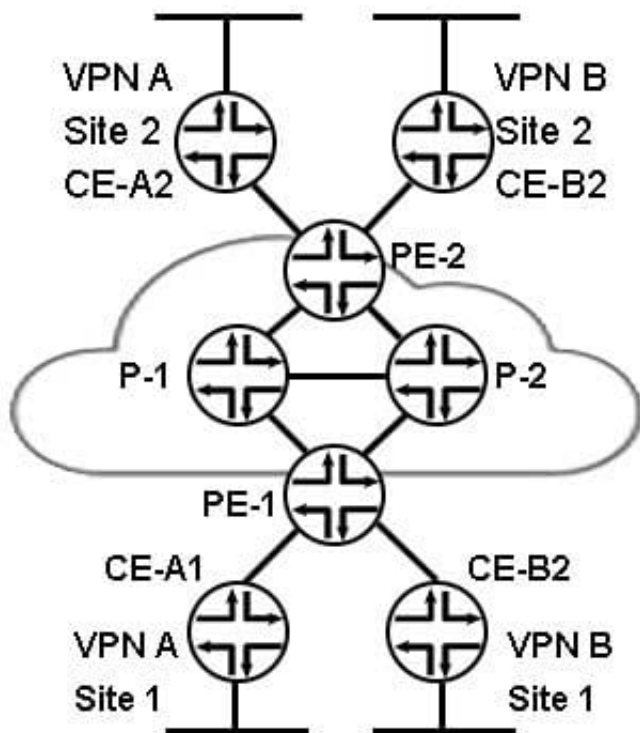

Referring to the exhibit, which two statements are true? (Choose two.)

- A. A BGP full mesh is only required between PE-1 and PE-2.
- B. A BGP full mesh is required between P1, P2, PE-1, and PE-2.
- C. MPLS must only be enabled on PE-1 and PE-2.
- D. MPLS must be enabled on P1, P2, PE-1, and PE-2.

Correct Answer: AD

QUESTION 4

Click the Exhibit button.



```
user@router> show route damping history extensive
inet.0: 15 destinations, 15 routes (14 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

200.200.200.0/24 (1 entry, 0 announced)
BGP Preference: /-101
Nexthop: 172.16.10.1 via ge-0/0/0.0, selected
State: <Hidden Ext>
Local AS: 2 Peer AS: 1
AS path: 1 I
Localpref: 100
Router ID: 192.168.1.1
Merit (last update/now) : 2777/2454
Default damping parameters used
Last update: 00:02:45 First update: 00:04:35
Flaps: 3
History entry. Expires in: 00:54:20
```

Which two statements are true about the route shown in the exhibit? (Choose two.)

- A. The route is currently active.
- B. The route is currently hidden.
- C. The route has an unreachable next-hop.
- D. The route is currently being damped.

Correct Answer: B

QUESTION 5

According to Juniper Networks, what are three methods of scaling Layer 2 VPNs? (Choose three.)

- A. inbound route filters
- B. route reflection
- C. outbound route filters
- D. filter-based forwarding
- E. BGP route refresh

Correct Answer: ABC