



JN0-662^{Q&As}

Service Provider Routing and Switching - Professional (JNCIP-SP)

Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.geekcert.com/jn0-662.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.

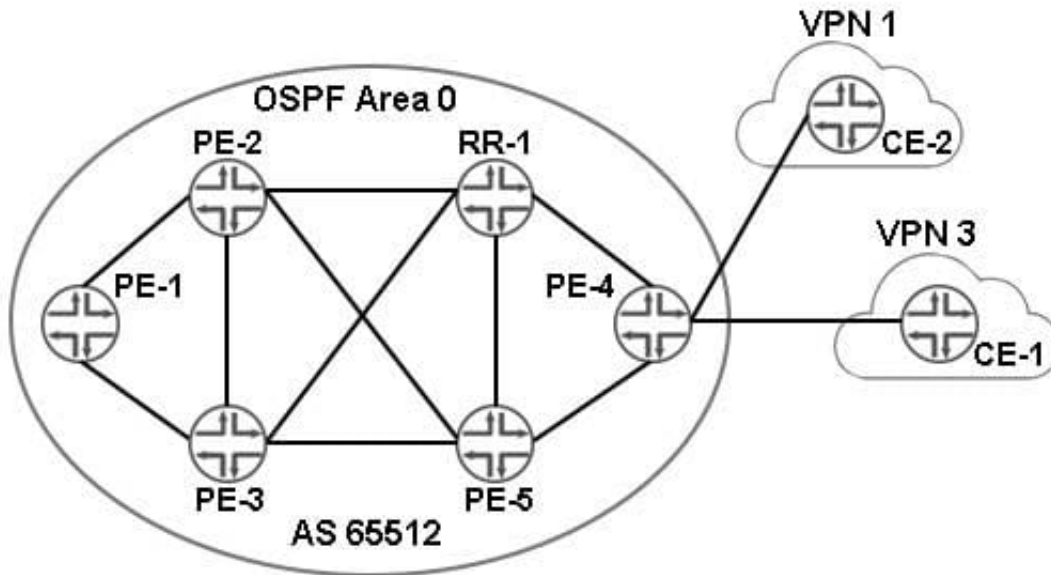

Referring to the exhibit, you have multiple Layer 3 VPNs established in your network. You are asked to ensure that PE-4 allows CE-2 in VPN 1 to communicate with CE-1 in VPN 3.

Which two statements are correct in this scenario? (Choose two.)

- A. Use a BGP export policy to share the appropriate VRF routes.
- B. Use the auto-export feature to share the appropriate VRF routes.
- C. Use a BGP import policy to share the appropriate VRF routes.
- D. Use rib-groups to share the appropriate VRF routes.

Correct Answer: AC

QUESTION 2

The network team will be performing maintenance on R3. The maintenance window requires a reboot of router R3. You want to gracefully move traffic away from R3 until after the reboot. In this scenario, how would you solve this problem?

- A. Configure the set protocols isis interface all level 1 hold-time 300 parameter, then reboot the router.
- B. Configure the set protocols isis overload parameter, then commit the configuration.
- C. Configure the set protocols isis spf-options delay 300 parameter, then reboot the router.
- D. Configure the set protocols isis interface all level 1 hello-interval 300 parameter, then reboot the router.



Correct Answer: B

QUESTION 3

Click the Exhibit button.



```
user@R1> show route 200/24
```

```
inet.0: 14 destinations, 15 routes (14 active, 0 holddown, 0 hidden) + = Active Route, - = Last Active, *  
= Both
```

```
200.0.0.0/24    *[BGP/170] 01:19:08, MED 1, localpref 100, from 192.168.10.4  
                AS path: 6 100 I, validation-state: unverified  
                > to 20.0.0.2 via ge-1/0/5.0  
                [BGP/170] 01:19:08, MED 10, localpref 100, from 192.168.10.3  
                AS path: 10 100 I, validation-state: unverified  
                > to 10.0.0.2 via qe-1/0/4.0
```

```
user@R1> show route 200/24
```

```
inet.0: 14 destinations, 16 routes (14 active, 1 holddown, 0 hidden) + = Active Route, - = Last Active, *  
= Both
```

```
200.0.0.0/24    +[BGP/170] 01:19:10, MED 10, localpref 100, from 192.168.10.3  
                AS path: 10 100 I, validation-state: unverified  
                > to 10.0.0.2 via qe-1/0/4.0  
                [BGP/170] 00:00:00, MED 0, localpref 100, from 192.168.10.2  
                AS path: 6 100 I, validation-state: unverified  
                > to 30.0.0.2 via qe-1/1/2.0  
                -[BGP/170] 01:19:10, MED 1, localpref 100, from 192.168.10.4  
                AS path: 6 100 I, validation-state: unverified  
                > to 20.0.0.2 via qe-1/0/5.0
```

```
user@R1> show route 200/24
```

```
inet.0: 14 destinations, 15 routes (14 active, 1 holddown, 0 hidden) + = Active Route, - = Last Active, *  
= Both
```

```
200.0.0.0/24    +[BGP/170] 01:19:13, MED 1, localpref 100, from 192.168.10.4  
                AS path: 6 100 I, validation-state: unverified  
                > to 20.0.0.2 via ge-1/0/5.0  
                -[BGP/170] 01:19:13, MED 10, localpref 100, from 192.168.10.3  
                AS path: 10 100 I, validation-state: unverified  
                > to 10.0.0.2 via qe-1/0/4.0
```

```
user@R1> show route 200/24
```

```
inet.0: 14 destinations, 15 routes (14 active, 0 holddown, 0 hidden) + = Active Route, - = Last Active, *  
= Both
```

```
200.0.0.0/24    *[BGP/170] 01:19:15, MED 1, localpref 100, from 192.168.10.4  
                AS path: 6 100 I, validation-state: unverified  
                > to 20.0.0.2 via ge-1/0/5.0  
                [BGP/170] 01:19:15, MED 10, localpref 100, from 192.168.10.3  
                AS path: 10 100 I, validation-state: unverified  
                > to 10.0.0.2 via qe-1/0/4.0
```



You have deployed route reflectors in your network. You are receiving the route 200.0.0.0/24 from AS10 and AS6 and are seeing the oscillation happening as shown in the exhibit.


What are two ways to solve this issue? (Choose two.)

- A. Configure the always-compare-med parameter on both route reflectors.
- B. Configure the add-path parameter on both route reflectors.
- C. Configure the med-plus-igp parameter on both route reflectors.
- D. Configure the as-path-ignore parameter on both route reflectors.

Correct Answer: AC

QUESTION 4

Click the Exhibit button.

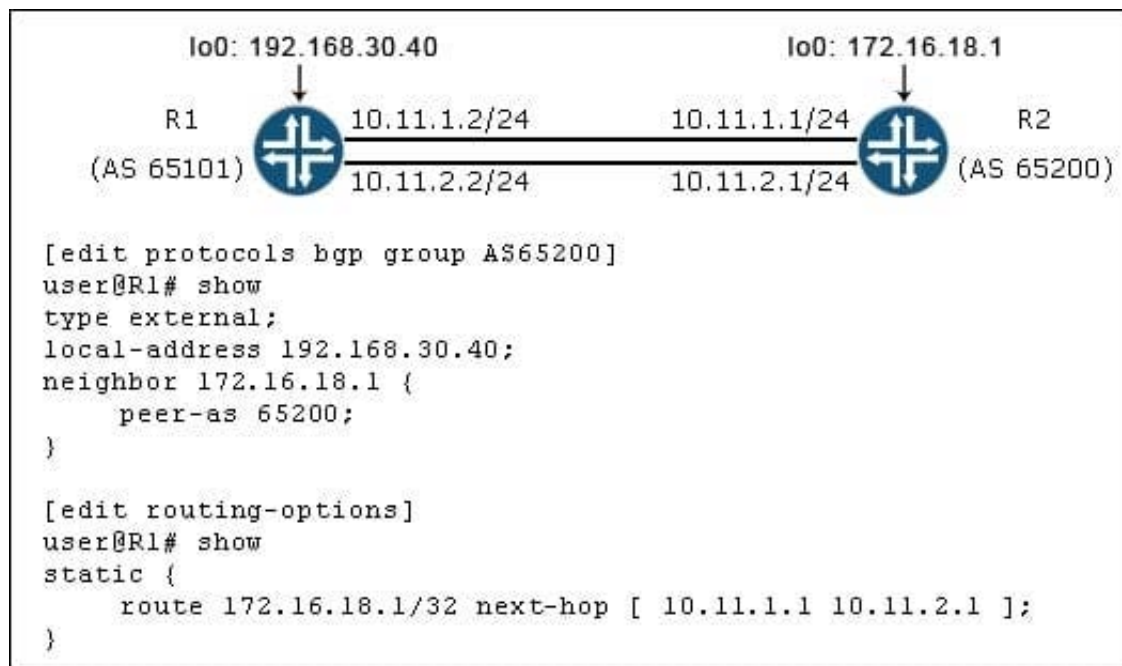

Referring to the exhibit, what must be added to the existing configuration to ensure that per-prefix load balancing occurs?

- A. multihop
- B. keep all
- C. multipath
- D. family inet unicast

Correct Answer: A



QUESTION 5

You are asked to configure a new Layer 3 VPN.

In this scenario, which routing-instance type must be used?

- A. vpls
- B. evpn
- C. vrf
- D. 12vpn

Correct Answer: C

[JN0-662 Practice Test](#)

[JN0-662 Study Guide](#)

[JN0-662 Exam Questions](#)